



UNIVERSITÀ
DI TRENTO

Department of
Information Engineering and Computer Science

Automated Reasoning and **Formal Verification**

Laboratory 11

Gabriele Masina

gabriele.masina@unitn.it

<https://github.com/masinag/arfv2026>

Università di Trento

May 21, 2026

These slides are derived from those by Stefano Tonetta, Alberto Griggio, Silvia Tomasi, Thi Thieu Hoa Le, Alessandra Giordani, Patrick Trentin, Giuseppe Spallitta for FM lab 2005-2024.



Real time systems


- ▶ Correctness depends both on the logical result and the time required to compute it
- ▶ Safety-critical domains: defense, transportation, health-care, space, avionics, etc.

Real time systems

- ▶ Correctness depends both on the logical result and the time required to compute it
- ▶ Safety-critical domains: defense, transportation, health-care, space, avionics, etc.

Timed Transition System (TTS)

- ▶ Transitions are either discrete or time-elapses
- ▶ All clocks increase equally in time-elapses
- ▶ Model Checking for TTS is **undecidable**

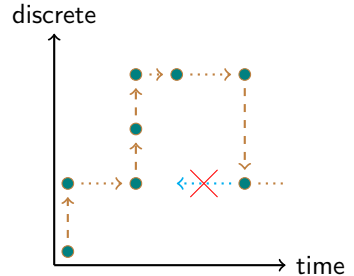

Real time systems


- ▶ Correctness depends both on the logical result and the time required to compute it
- ▶ Safety-critical domains: defense, transportation, health-care, space, avionics, etc.

Timed Transition System (TTS)

- ▶ Transitions are either discrete or time-elapses
- ▶ All clocks increase equally in time-elapses
- ▶ Model Checking for TTS is **undecidable**


Timed Automata (TA)

- ▶ **Decidable** restriction of TTS
- ▶ **Finite Time Abstraction:**
clocks compared only to constants




Timed Automata (TA)

- ▶ Explicit graph representation: discrete states (nodes) and transitions (edges).
- ▶ Symbolic representation of temporal aspects via (convex) constraints:
location invariants, transition guards and resets.

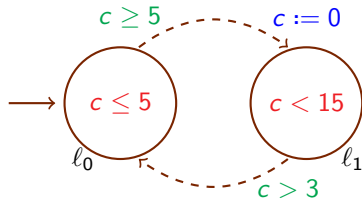

Timed Automata (TA)

- ▶ Explicit graph representation: discrete states (nodes) and transitions (edges).
- ▶ Symbolic representation of temporal aspects via (convex) constraints:
location invariants, transition guards and resets.

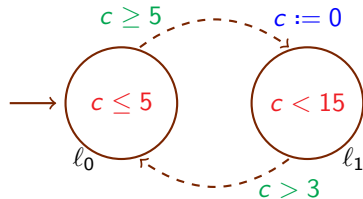

Symbolic TTS

- ▶ Formulas represent sets of states: $p := \{s \mid s \models p\}$
- ▶ Symbolic transitions $\varphi(X, X')$: discrete transition $s_0 \rightarrow s_1$ iff $s_0(X), s_1(X') \models \varphi(X, X')$

⇒ can be described in (timed) nuXmv!


$$\begin{aligned}
 (l = l_0) &\rightarrow (c \leq 5) && \wedge \\
 (l = l_1) &\rightarrow (c < 15) && \wedge \\
 (l = l_1 \wedge l' = l_0) &\rightarrow (c > 3) && \wedge \\
 (l = l_0 \wedge l' = l_1) &\rightarrow ((c \geq 5) \wedge (c' = 0))
 \end{aligned}$$



Outline

1. Timed nuXmv
2. Timed and Infinite Traces
3. Exercises
4. Homework

nuXmv for Timed System: Architecture¹

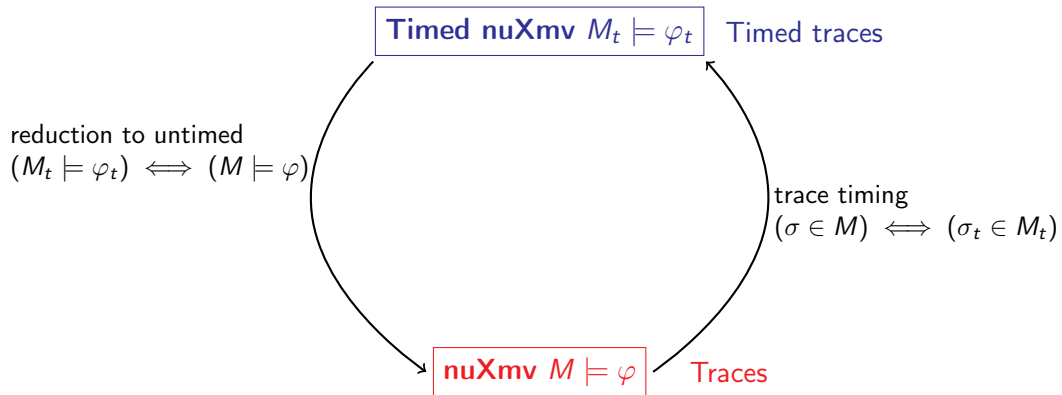

¹ Alessandro Cimatti et al. "Extending nuXmv with Timed Transition Systems and Timed Temporal Properties". In: *CAV 2019*
 1. Timed nuXmv



Overview

Extension of nuXmv for real-time system modelling and verification:

- ▶ Allows for modelling Timed Transition Systems with **continuous time domain**
- ▶ Enables specification and verification of **timed properties**



Time Domain and Clock Variables

- ▶ Must start with `@TIME_DOMAIN continuous;`
- ▶ New variable type: `clock`
- ▶ `clock` variables increase uniformly with time
- ▶ Built-in `clock` variable: `time`

System Specification

INIT : Specifies initial conditions

TRANS : Constrains **discrete** behavior **only**

INVAR : Defines invariant conditions. Clocks allowed in invariants with shape:
(no clock expr) -> (convex clock expr);
(convex expression: conjunction of atoms)

Timed Transitions

- ▶ System evolution alternates between:
 - ▶ **discrete** transitions: instantaneous state changes
 - ▶ **timed** transitions: passage of time where all clocks increase by the same amount
- ▶ **URGENT** conditions (time-freeze): when one of the **URGENT** conditions is satisfied, only discrete transitions are allowed
- ▶ **noncontinuous** type modifier: allows variables to change value in timed transitions

Specifying Properties


Specifications in **Metric Temporal Logic**^a ($MTL_{0,\infty}$):

- ▶ LTL operators: **X**, **Y** (yesterday) **U**, **S** (since), **F**, **G**
- ▶ Bounded LTL operators: **F[a,b]**, **G[a,b]** (finally/globally if $time' \in time + [a, b]$)
- ▶ Different operators to refer to the **discrete** next (**X**) and **timed** next (**X~**), and symmetrically for the past (**Y** and **Y~**)
- ▶ Operators to get the value of **expr** the next/last time **p** will hold/held:
time_until(p) is the time until p will hold
time_since(p) is the time since p held
expr @F~ p is the value expr will have the next time p will hold.
expr @O~ p is the value expr had the last time p held

^ahttps://en.wikipedia.org/wiki/Metric_temporal_logic



- ▶ `clock` symbols and `time`: variables of type `real`
- ▶ δ : the amount of time elapse for every transition (continuous positive variable)
- ▶ ι : prescribes the alternation of singular $[\cdot]$ and open $(-)$ time intervals

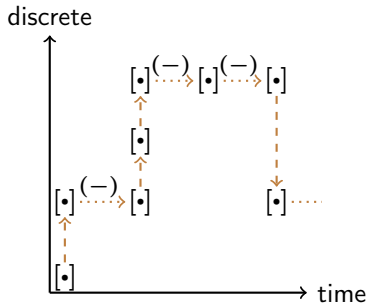

Properties Rewriting

MTL *fragment*

$$F_{[0,5]} p$$

↓ rewrite

LTL *timed*

$$((\neg p U p) \wedge \text{time_until}(p) \leq 5) \vee \\ ((\neg p U \tilde{X} p) \wedge \text{time_until}(p) < 5)$$

↓ untime

LTL *untimed*

$$((\neg p U p) \wedge (\text{time}@ \tilde{F} p) - \text{time} \leq 5) \vee \\ ((\neg p U ((\neg \iota \wedge p) \vee X(\neg \iota \wedge p))) \wedge (\text{time}@ \tilde{F} p) - \text{time} < 5)$$



Outline

1. Timed nuXmv
2. Timed and Infinite Traces
3. Exercises
4. Homework

From Untimed Model Execution to Timed Trace


Issue

- ▶ nuXmv traces must have **lasso shape**: $\alpha\beta^\omega$, with α and β sequences of states.
 $\implies$ complete for finite state systems.
- ▶ In **timed** and **infinite** state systems they may not exist!

Solution

Lasso-shaped traces with **diverging variables** $\alpha\beta(i)^\omega$:

- ▶ Some variables **repeat** (like in lasso-shaped traces)
- ▶ Other variables **diverge** as a function of previous state:
 $s_i(v) = f_v(s_{i-1})$
e.g. $next(time) := time + \delta$

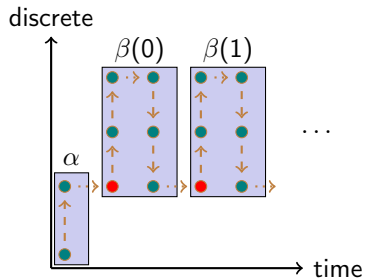



How to Run: Model [1/3]

`./nuXmv -time -int` start nuXmv interactively and enable commands for timed models.

`go_time` process the model.

`write_untimed_model` dump SMV model corresponding to the input timed system.



How to Run: Verify [2/3]

`timed_check_invar` check invariants

`timed_check_ltlspec` check LTL

Mostly the same command line options of the corresponding commands for untimed models.



How to Run: Simulation and Traces [3/3]

`timed_pick_state` pick initial state.

`timed_simulate` simulate the model starting from a given state.

Formally nuXmv uses a **super-dense** **weakly-monotonic** time model $T \subset \mathbb{N} \times \mathbb{R}_0^+$.

Time points are pairs $\langle i, r \rangle$ with $i \in \mathbb{N}$ (step count) and $r \in \mathbb{R}_0^+$ (time).

We say that $\langle i, r \rangle < \langle i', r' \rangle$ iff $i < i'$ or $i = i'$ and $r < r'$.

Discrete step $\langle i, r \rangle \rightarrow \langle i + 1, r \rangle$

Time elapse $\langle i, r \rangle \rightarrow \langle i, r + \delta \rangle$ for $\delta > 0$

Semantics of Temporal Operators

$\sigma, t \models \phi$ is defined recursively on the structure of ϕ :

$\sigma, t \models \phi_1 U \phi_2$ iff there exists $t' \geq t$, $\sigma, t' \models \phi_2$ and for all $t'', t \leq t'' < t'$, $\sigma, t'' \models \phi_1$

$\sigma, t \models \phi_1 S \phi_2$ iff there exists $t' \leq t$, $\sigma, t' \models \phi_2$ and for all $t'', t' < t'' \leq t$, $\sigma, t'' \models \phi_1$

$\sigma, t \models X\phi$ iff there exists $t' > t$, $\sigma, t' \models \phi$ and there exists no $t'', t < t'' < t'$

Intuition: the next is reached by a **discrete step** and ϕ holds there. If a time elapse is performed, there are infinitely many such t'' .

$\sigma, t \models \tilde{X}\phi$ iff for all $t' > t$, there exists $t'', t < t'' < t'$, $\sigma, t'' \models \phi$

Intuition: the next is reached by a **time elapse** and ϕ holds there. If a discrete step is performed, there are no such t'' .

$\sigma, t \models Y\phi$ iff $t > 0$ and there exists $t' < t$, $\sigma, t' \models \phi$ and there exists no $t'', t' < t'' < t$

$\sigma, t \models \tilde{Y}\phi$ iff $t > 0$ and for all $t' < t$, there exists $t'', t' < t'' < t$, $\sigma, t'' \models \phi$

Usual definitions for predicates, conjunction and negation apply.

2. Timed and Infinite Traces

Let b be a boolean symbol. Are the following properties **true** or **false**?

$$\tilde{Y}\top :$$

$$(\neg Xb) \rightarrow (X\neg b) :$$

$$(\neg \tilde{X} b) \rightarrow (\tilde{X}\neg b) :$$

$$(X\neg b) \rightarrow (\neg Xb) :$$

$$(\tilde{X}\neg b) \rightarrow (\neg \tilde{X}b) :$$

$$(G\tilde{X}\top) \rightarrow ((Gb) \vee (G\neg b)) :$$

Let b be a boolean symbol. Are the following properties **true** or **false**?

$\tilde{Y}\top$: **false** in the initial state.

$(\neg Xb) \rightarrow (X\neg b)$:

$(\neg \tilde{X} b) \rightarrow (\tilde{X}\neg b)$:

$(X\neg b) \rightarrow (\neg Xb)$:

$(\tilde{X}\neg b) \rightarrow (\neg \tilde{X}b)$:

$(G\tilde{X}\top) \rightarrow ((Gb) \vee (G\neg b))$:

Let b be a boolean symbol. Are the following properties **true** or **false**?

$\tilde{Y}\top$: **false** in the initial state.

$(\neg Xb) \rightarrow (X\neg b)$: **false**, the first one holds in every time elapse, the second one holds only in discrete steps where $\neg b$ holds in the next state.

$(\neg \tilde{X} b) \rightarrow (\tilde{X}\neg b)$:

$(X\neg b) \rightarrow (\neg Xb)$:

$(\tilde{X}\neg b) \rightarrow (\neg \tilde{X}b)$:

$(G\tilde{X}\top) \rightarrow ((Gb) \vee (G\neg b))$:

Let b be a boolean symbol. Are the following properties **true** or **false**?

$\tilde{Y}\top$: **false** in the initial state.

$(\neg Xb) \rightarrow (X\neg b)$: **false**, the first one holds in every time elapse, the second one holds only in discrete steps where $\neg b$ holds in the next state.

$(\neg \tilde{X} b) \rightarrow (\tilde{X}\neg b)$: **false**, as above but for time elapses.

$(X\neg b) \rightarrow (\neg Xb)$:

$(\tilde{X}\neg b) \rightarrow (\neg \tilde{X}b)$:

$(G\tilde{X}\top) \rightarrow ((Gb) \vee (G\neg b))$:

Let b be a boolean symbol. Are the following properties **true** or **false**?

$\tilde{Y}\top$: **false** in the initial state.

$(\neg Xb) \rightarrow (X\neg b)$: **false**, the first one holds in every time elapse, the second one holds only in discrete steps where $\neg b$ holds in the next state.

$(\neg \tilde{X} b) \rightarrow (\tilde{X}\neg b)$: **false**, as above but for time elapses.

$(X\neg b) \rightarrow (\neg Xb)$: **true**, the first one holds iff there is a discrete step and $\neg b$ holds in the next state, hence Xb is **false**.

$(\tilde{X}\neg b) \rightarrow (\neg \tilde{X}b)$:

$(G\tilde{X}\top) \rightarrow ((Gb) \vee (G\neg b))$:

Let b be a boolean symbol. Are the following properties **true** or **false**?

$\tilde{Y}\top$: **false** in the initial state.

$(\neg Xb) \rightarrow (X\neg b)$: **false**, the first one holds in every time elapse, the second one holds only in discrete steps where $\neg b$ holds in the next state.

$(\neg \tilde{X} b) \rightarrow (\tilde{X}\neg b)$: **false**, as above but for time elapses.

$(X\neg b) \rightarrow (\neg Xb)$: **true**, the first one holds iff there is a discrete step and $\neg b$ holds in the next state, hence Xb is **false**.

$(\tilde{X}\neg b) \rightarrow (\neg \tilde{X}b)$: **true**, as above but for time elapses.

$(G\tilde{X}\top) \rightarrow ((Gb) \vee (G\neg b))$:

Let b be a boolean symbol. Are the following properties **true** or **false**?

$\tilde{Y}T$: **false** in the initial state.

$(\neg Xb) \rightarrow (X\neg b)$: **false**, the first one holds in every time elapse, the second one holds only in discrete steps where $\neg b$ holds in the next state.

$(\neg \tilde{X} b) \rightarrow (\tilde{X}\neg b)$: **false**, as above but for time elapses.

$(X\neg b) \rightarrow (\neg Xb)$: **true**, the first one holds iff there is a discrete step and $\neg b$ holds in the next state, hence Xb is **false**.

$(\tilde{X}\neg b) \rightarrow (\neg \tilde{X}b)$: **true**, as above but for time elapses.

$(G\tilde{X}T) \rightarrow ((Gb) \vee (G\neg b))$: **true**, the first part implies that we never perform a discrete transition and the truth value of b can only change in discrete transitions.



LTL- MTL Properties [2/2]

See files in examples.




Outline

1. Timed nuXmv
2. Timed and Infinite Traces
3. Exercises
4. Homework

Exercise 11.1: Simple Timed Automaton

Write the SMV model corresponding to the timed automaton in the figure.

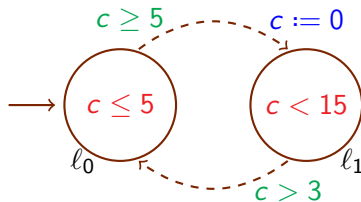

Encode the following properties:

- ▶ from location ℓ_0 we always reach ℓ_1 within 5 time units
- ▶ if we are in ℓ_1 then for the next 3 time units we remain in ℓ_1
- ▶ if just arrived in ℓ_1 then for the next 3 time units we remain in ℓ_1 .

Exercise 11.2: Timed Thermostat

A thermostat has 2 states: **on** and **off**;

- ▶ if the temperature is **below 18** degrees the thermostat switches **on**.
- ▶ if the temperature is **above 18** degrees the thermostat switches **off**.

Every time the thermostat measures the temperature in the room, the temperature **increases** (if **on**) or **decreases** (if **off**) by dt (with respect to the previous check).

The thermostat measures the temperature at most ($\leq$) every max_dt time units.

The temperature initially is in $[18 - max_dt, 18 + max_dt]$.

Verify that the temperature is always in $[18 - 2 \cdot max_dt, 18 + 2 \cdot max_dt]$




Outline

1. Timed nuXmv
2. Timed and Infinite Traces
3. Exercises
4. Homework

Homework 11.1: Timed Automata

Encode the timed automata in the figure below in nuXmv.

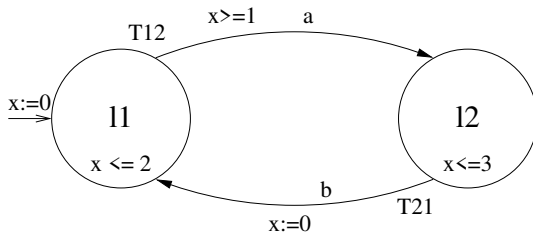


Check the following properties:

- ▶ From location ℓ_2 we always reach ℓ_1 within 1 time unit
- ▶ From location ℓ_2 we always reach ℓ_1 within 2 time units
- ▶ It is possible to be in location ℓ_1 at time $t = 1$

Homework 11.2: Light Control

Encode the timed automata in the figure below in nuXmv.

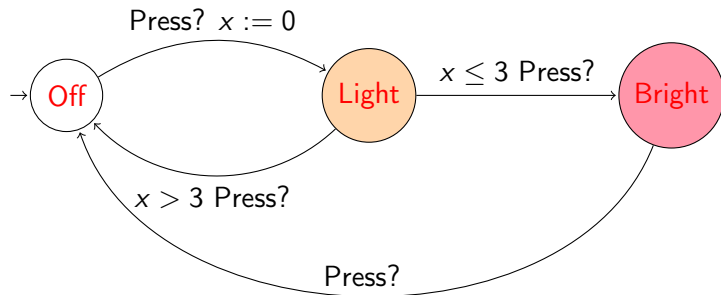

Verify the following properties:

- ▶ If the button is pressed infinitely often, then the light is turned on infinitely often.
- ▶ If the button is pressed infinitely often within 2 time units, then the light is bright infinitely often.



References

- [1] [Alessandro Cimatti et al.](#) "Extending nuXmv with Timed Transition Systems and Timed Temporal Properties". In: *CAV 2019*.