




c Every method, same 30 runs

Method	How a head is scored	How it is used	Exact count	Never broke
Collateral rule (ours)	OBS score: loss after removing it, the others re-fit (Hassibi & Stork 1993)	during training, from scratch; price per head, gradual fade	29/30	30/30
ZipLM-style (Kurtic et al. 2023)	OBS score (the same as ours)	all at once after training, then fine-tuned	24/30	0/30
OBD-style (LeCun et al. 1990)	loss after removing it, no re-fit (diagonal Hessian)	our rule, this score	2/30	30/30
Michel et al. 2019	gradient $ \partial L / \partial g_h $	one at a time, while solved	28/30	0/30
Learned gates (Voita et al. 2019)	a learned on/off gate, L0 penalty (best of 3)	learned during training	9/30	0/30
Random choice	none	our rule, random head	30/30	6/30

Every method on the same 30 runs (tasks needing 2, 4 and 8 heads, 10 seeds each). Exact count: heads left = heads needed.
Never broke: once solved, the loss never went back above the solved bar.

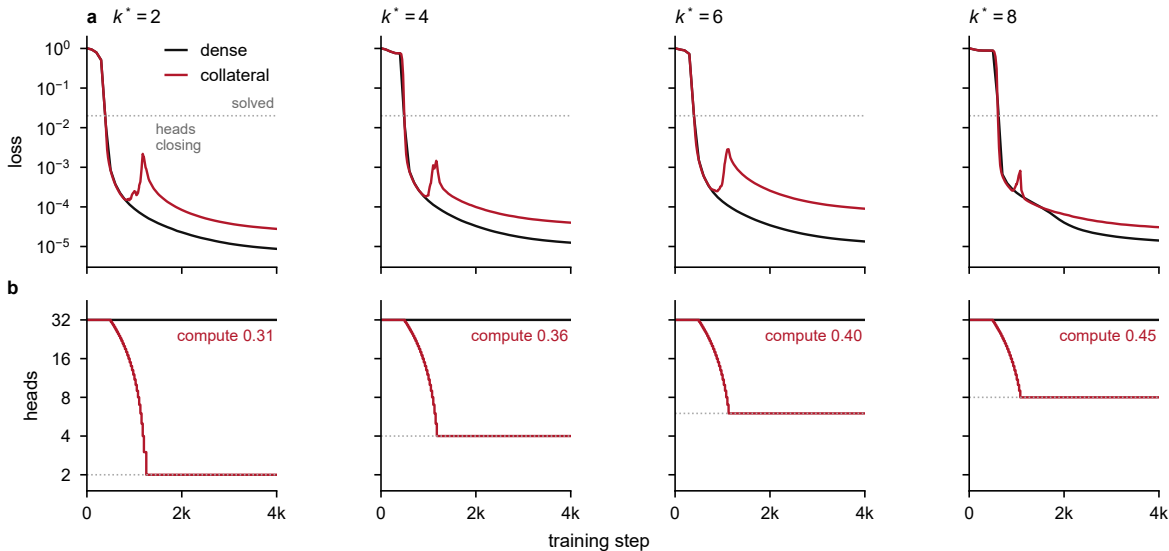