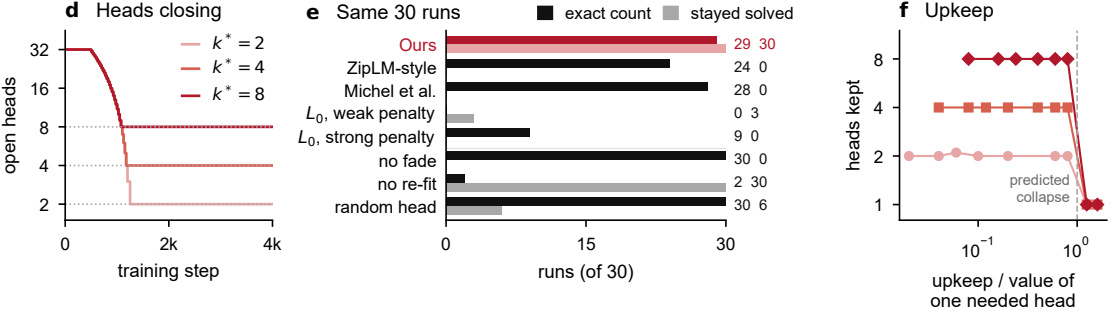
d
Heads closing
$k^* = 2$
$k^* = 4$
$k^* = 8$
open heads
32
16
8
4
2
0
2k
4k
training step
e
Same 30 runs
exact count
stayed solved
Ours
ZipLM-style
Michel et al.
L_0, weak penalty
L_0, strong penalty
no fade
no re-fit
random head
29 30
24 0
28 0
0 3
9 0
30 0
2 30
30 6
0
15
30
runs (of 30)
f
Upkeep
heads kept
8
4
2
1
predicted
collapse
10^{-1}
10^{0}
upkeep / value of
one needed head