

# Docker Host

When docker build command is issued from docker daemon

(The runnable jar is taken and using the docker file, an image is created out of it)

(Here: **Broker Service Image**)



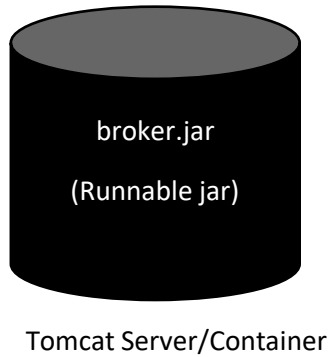




Image Repository

2. docker run

1. docker build

3. Result of docker run

3. Result of docker run

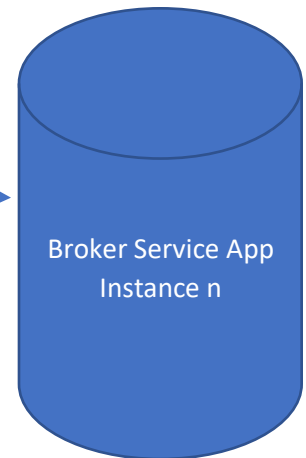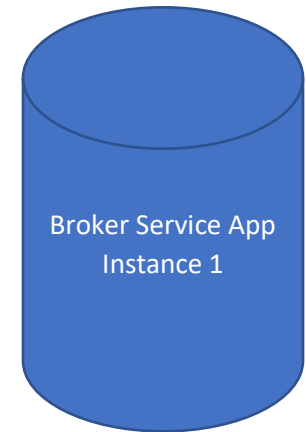

Containers

Docker Daemon

