

FRAMES

Name: welcome.java

INFORMATION TECHNOLOGY

Session:- 2022 - 2023

Project On :-

STUDENT MANAGEMENT SYSTEM

Made By :-

Tushar Agrawal


Tejesh Patel

Dolly Patel

Yogesh Chandra

Continue

Name: login.java

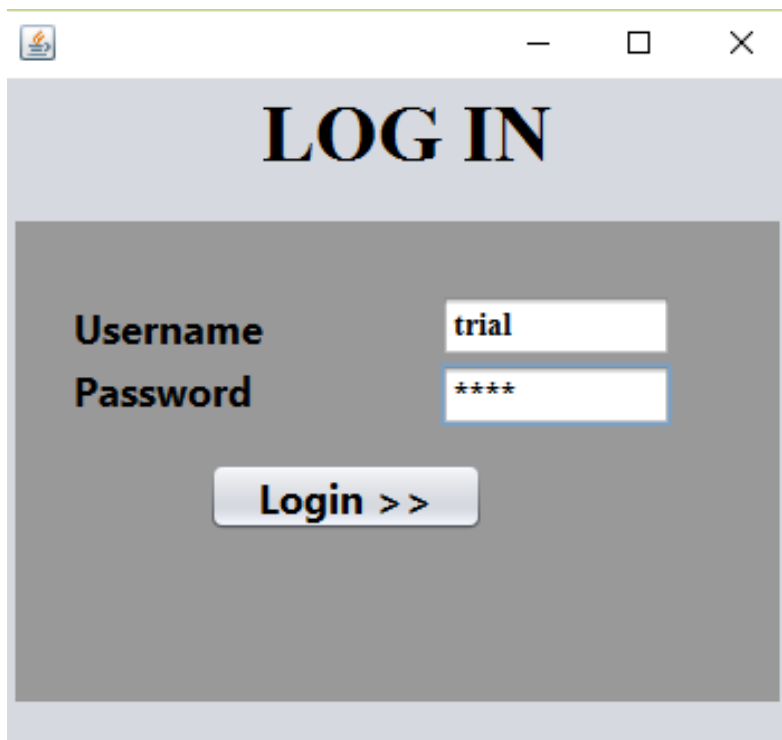


LOG IN

Username


Password

Login >>

Name: dashboard.java

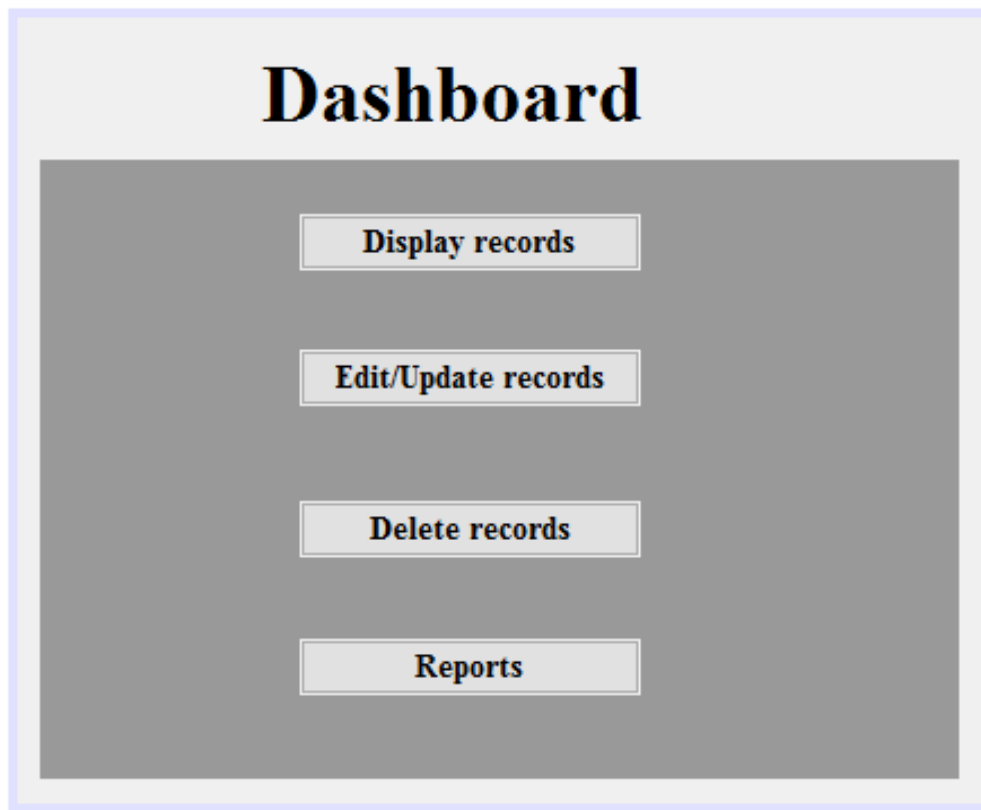

Name: displayRecords.java

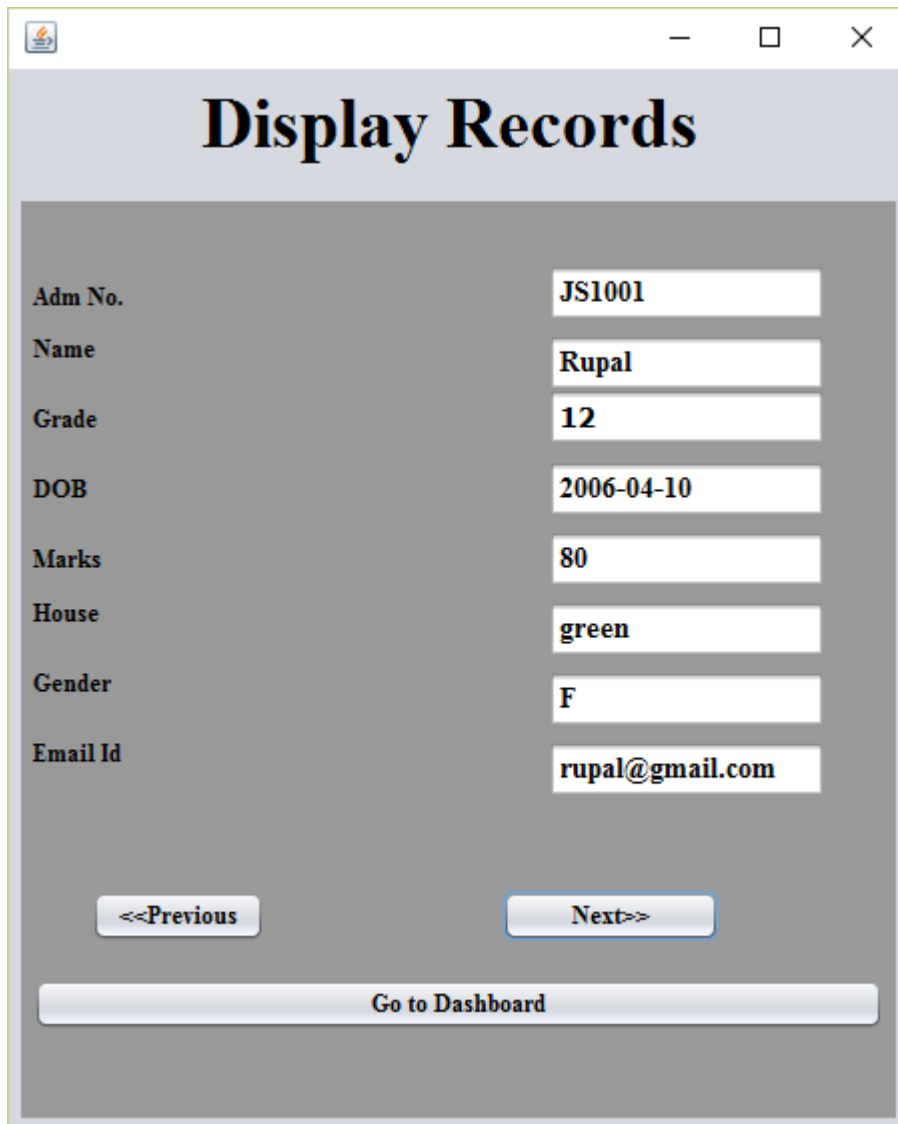


Adm No.	JS1001
Name	Rupal
Grade	12
DOB	2006-04-10
Marks	80
House	green
Gender	F
Email Id	rupal@gmail.com

<<Previous

Next>>

Go to Dashboard

Name: deleteRecords.java

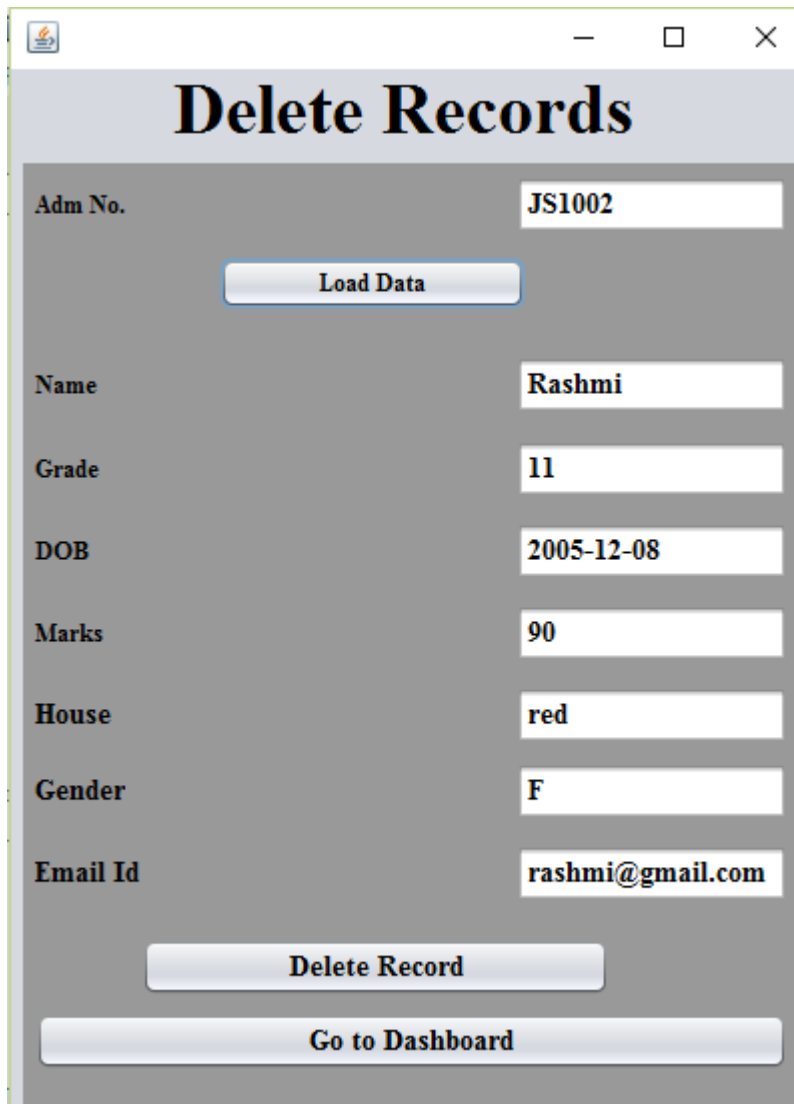

The image shows a Java Swing window titled "Delete Records". The window has a standard title bar with a minimize button, a maximize button, and a close button. The main content area has a light gray background. At the top, the title "Delete Records" is displayed in a large, bold, black serif font. Below the title, there are several input fields and buttons. The first input field is labeled "Adm No." and contains the text "JS1002". Below this field is a button labeled "Load Data". The next input field is labeled "Name" and contains the text "Rashmi". Below this field is an input field labeled "Grade" containing "11". Below that is an input field labeled "DOB" containing "2005-12-08". Below that is an input field labeled "Marks" containing "90". Below that is an input field labeled "House" containing "red". Below that is an input field labeled "Gender" containing "F". Below that is an input field labeled "Email Id" containing "rashmi@gmail.com". At the bottom of the form area, there are two buttons: "Delete Record" and "Go to Dashboard".

Field	Value
Adm No.	JS1002
Name	Rashmi
Grade	11
DOB	2005-12-08
Marks	90
House	red
Gender	F
Email Id	rashmi@gmail.com

Name: reportGeneration.java

— □ ×

Report Generation

Specify Search Criteria Below

Search Field	Operator	Criteria
AdmNo ▼	> ▼	11
Empty Table		Search to the database

AdmNo	Name	Grade	DOB	Marks	House	Gender	Email Id
JS1001	Rupal	12	2006-04-10	80	green	F	rupal@gm...
JS1002	Rashmi	11	2005-12-08	90	red	F	rashmi@g...
JS1003	Arnav	12	2004-05-25	77	green	M	arnav@gm...
JS1004	Arun	12	2005-08-23	72	blue	M	arun@gma...

[Go to Dashboard](#)

CODING

Welome.java

```
private void jButton1ActionPerformed(java.awt.event.ActionEvent evt) {  
    Login ln = new Login();  
    ln.setVisible(true);  
}
```

login.java

```
import java.sql.*;  
import javax.swing.JOptionPane;
```

public class Login extends javax.swing.JFrame {

```
    Connection con = null;  
    Statement stmt = null;  
    ResultSet rs = null;
```

private void jButton1ActionPerformed(java.awt.event.ActionEvent evt) {

```
    // TODO add your handling code here:  
    try{  
        Class.forName ("java.sql.Driver");  
        con = DriverManager.getConnection("jdbc:mysql://localhost/school", "root","opjs");  
  
        stmt = con.createStatement();  
        String s = JTF1.getText();  
        String pwd = new String (JPF1.getPassword());  
        String query = "Select * from users where username ='"+ s + "';";  
        rs = stmt.executeQuery(query);  
        if (rs.next()){
```

```
String t = rs.getString ("Password");

if (t.equals(pwd)){

    new dashboard ().setVisible (true);

    this.dispose();

}

else{

    JOptionPane.showMessageDialog(null,"wrong username/password");

}

}

else {

    JOptionPane.showMessageDialog (null,"wrong username");

}

stmt.close();

con.close();

}

catch (Exception e){

    JOptionPane.showMessageDialog(null,e.getMessage());

}

}
```


dashboard.java

private void jButton2ActionPerformed(java.awt.event.ActionEvent evt) {

new updateRecords().setVisible(true);

this.dispose();

}

private void jButton1ActionPerformed(java.awt.event.ActionEvent evt) {

new displayRecords().setVisible(true);

this.dispose();

}

private void jButton3ActionPerformed(java.awt.event.ActionEvent evt) {

new deleteRecords().setVisible(true);

this.dispose();

}

private void jButton4ActionPerformed(java.awt.event.ActionEvent evt) {

new reportGeneration().setVisible(true);

this.dispose();

}

displayRecords.java

```
import java.sql.*;
```

```
import javax.swing.JOptionPane;
```

```
public class displayRecords extends javax.swing.JFrame {
```

```
    Connection con=null;
```

```
    Statement stmt=null;
```

```
    ResultSet rs=null;
```

```
public displayRecords(){
```

```
    initComponents();
```

```
    try{
```

```
        Class.forName("java.sql.Driver");
```

```
        con=DriverManager.getConnection("jdbc:mysql://localhost/school","root","opjs");
```

```
        Statement stmt=con.createStatement();
```

```
        String query="select * from student;";
```

```
        rs=stmt.executeQuery(query);
```

```
    }
```

```
    catch(Exception e){
```

```
        JOptionPane.showMessageDialog(null, e.getMessage());
```

```
    }
```

```
}
```

```
private void jButton2ActionPerformed(java.awt.event.ActionEvent evt) {
```

```
    try{
```

```
        if (rs.next()){
```

```
            String s1 =rs.getString("admno");
```

```
            String s2 =rs.getString("name");
```

```
            String s3 =rs.getString("grade");
```

```
            String s4 =rs.getString("DOB");
```

```

        String s5 =rs.getString("Marks");

        String s6 =rs.getString("house");

        String s7 =rs.getString("gender");

        String s8 =rs.getString("emailid");

        JTF1.setText(s1);

        JTF2.setText(s2);

        JTF3.setText(s3);

        JTF4.setText(s4);

        JTF5.setText(s5);

        JTF6.setText(s6);

        JTF7.setText(s7);

        JTF8.setText(s8);

    }

    else{

        rs.previous();

        JOptionPane.showMessageDialog(null,"Last Record!!!");

    }

}

catch (Exception e){

    JOptionPane.showMessageDialog(null,e.getMessage());

}

}

```

private void jButton1ActionPerformed(java.awt.event.ActionEvent evt) {

// TODO add your handling code here:

```

try{

    if (rs.previous()){

        String s1 =rs.getString("admno");

        String s2 =rs.getString("name");

        String s3 =rs.getString("grade");

```

```

        String s4 =rs.getString("DOB");

        String s5 =rs.getString("Marks");

        String s6 =rs.getString("house");

        String s7 =rs.getString("gender");

        String s8 =rs.getString("emailid");

        JTF1.setText(s1);

        JTF2.setText(s2);

        JTF3.setText(s3);

        JTF4.setText(s4);

        JTF5.setText(s5);

        JTF6.setText(s6);

        JTF7.setText(s7);

        JTF8.setText(s8);

    }

    else{

        rs.previous();

        JOptionPane.showMessageDialog(null,"First Record!!!");

    }

}

catch (Exception e){

    JOptionPane.showMessageDialog(null,e.getMessage());

}

}

```

```

private void jButton3ActionPerformed(java.awt.event.ActionEvent evt) {

    new dashboard().setVisible(true);

    this.dispose();

}

```

updateRecord.java

```
import java.sql.*;
```

```
import javax.swing.JOptionPane;
```

```
public class updateRecords extends javax.swing.JFrame {
```

```
    Connection con=null;
```

```
    Statement stmt=null;
```

```
    ResultSet rs=null;
```

```
private void jButton1ActionPerformed(java.awt.event.ActionEvent evt) {
```

```
    try{
```

```
        Class.forName("java.sql.Driver");
```

```
        con=DriverManager.getConnection("jdbc:mysql://localhost/school","root","opjs");
```

```
        stmt=con.createStatement();
```

```
        String s=JTF1.getText();
```

```
        String query="select * from student where admno='"+s+"'";
```

```
        rs=stmt.executeQuery(query);
```

```
        if (rs.next()){
```

```
            String s2 =rs.getString("name");
```

```
            String s3 =rs.getString("grade");
```

```
            String s4 =rs.getString("DOB");
```

```
            String s5 =rs.getString("Marks");
```

```
            String s6 =rs.getString("house");
```

```
            String s7 =rs.getString("gender");
```

```
            String s8 =rs.getString("emailid");
```

```
            JTF2.setText(s2);
```

```
            JTF3.setText(s3);
```

```
            JTF4.setText(s4);
```

```
            JTF5.setText(s5);
```

```
            JTF6.setText(s6);
```

```

        JTF7.setText(s7);

        JTF8.setText(s8);

        jButton1.setEnabled(true);
    }

    else{

        rs.previous();

        JOptionPane.showMessageDialog(null,"Record not available!!!");
    }
}

catch (Exception e){

    JOptionPane.showMessageDialog(null,e.getMessage());
}

}

```

private void jButton2ActionPerformed(java.awt.event.ActionEvent evt) {

```

    try{

        Class.forName("java.sql.Driver");

        con=DriverManager.getConnection("jdbc:mysql://localhost/school","root","opjs");

        stmt=con.createStatement();

        String s1 =JTF1.getText();

        String s2 =JTF2.getText();

        String s3 =JTF3.getText();

        String s4 =JTF4.getText();

        String s5 =JTF5.getText();

        String s6 =JTF6.getText();

        String s7 =JTF7.getText();

        if(s7.equals(""))

            s7= "NULL";

        String s8 =JTF8.getText();
    }
}

```

```
String query="Update student set  
name='"+s2+"',grade='"+s3+"',dob='"+s4+"',marks='"+s5+"',house='"+s6+"',gender='"+s7+"',emailid='"+s8  
+" where admno='"+s1+"';";
```

```
stmt.executeUpdate(query);
```

```
JOptionPane.showMessageDialog(null,"Record saved successfully!!!!");
```

```
new dashboard().setVisible(true);
```

```
this.dispose();
```

```
}
```

```
catch (Exception e){
```

```
JOptionPane.showMessageDialog(null,e.getMessage());
```

```
}
```

```
}
```

```
private void jButton3ActionPerformed(java.awt.event.ActionEvent evt) {
```

```
new dashboard().setVisible(true);
```

```
this.dispose();
```

```
}
```

deleteRecord.java

```
import java.sql.*;

import javax.swing.JOptionPane;

public class deleteRecords extends javax.swing.JFrame {

    Connection con=null;

    Statement stmt=null;

    ResultSet rs=null;

    private void jButton2ActionPerformed(java.awt.event.ActionEvent evt) {

        try{

            Class.forName("java.sql.Driver");

            con=DriverManager.getConnection("jdbc:mysql://localhost/school","root","opjs");

            Statement stmt=con.createStatement();

            String s=JTF1.getText();

            String query="select * from student where admno='"+s+"'";

            rs=stmt.executeQuery(query);

            if (rs.next()){

                String s2 =rs.getString("name");

                String s3 =rs.getString("grade");

                String s4 =rs.getString("DOB");

                String s5 =rs.getString("Marks");

                String s6 =rs.getString("house");

                String s7 =rs.getString("gender");

                String s8 =rs.getString("emailid");

                JTF2.setText(s2);

                JTF3.setText(s3);

                JTF4.setText(s4);

                JTF5.setText(s5);

                JTF6.setText(s6);
```



```

        JTF7.setText(s7);

        JTF8.setText(s8);

        jButton2.setEnabled(true);
    }

    else{

        rs.previous();

        JOptionPane.showMessageDialog(null,"Record not available!!!");

    }

}

catch (Exception e){

    JOptionPane.showMessageDialog(null,e.getMessage());

}

}

```

private void jButton1ActionPerformed(java.awt.event.ActionEvent evt) {

```

    try{

        Class.forName("java.sql.Driver");

        con=DriverManager.getConnection("jdbc:mysql://localhost/school","root","opjs");

        stmt=con.createStatement();

        String s1 =JTF1.getText();

        String query="delete from student where admno='"+s1+"'";

        stmt.executeUpdate(query);

        JOptionPane.showMessageDialog(null,"Record deleted successfully!!!!");

        new dashboard().setVisible(true);

        this.dispose();

    }

    catch (Exception e){

        JOptionPane.showMessageDialog(null,e.getMessage());

    }

}

```

```
private void jButton3ActionPerformed(java.awt.event.ActionEvent evt) {  
  
    new dashboard().setVisible(true);  
  
    this.dispose();  
}
```

reportGeneration.java

```
import java.sql.*;  
  
import javax.swing.JOptionPane;  
  
import javax.swing.table.DefaultTableModel;
```

```
public class reportGeneration extends javax.swing.JFrame {
```

```
    Connection con=null;  
  
    Statement stmt=null;  
  
    ResultSet rs=null;
```

```
private void jButton1ActionPerformed(java.awt.event.ActionEvent evt) {
```

```
    DefaultTableModel model=(DefaultTableModel)JTable2.getModel();  
  
    int rows=model.getRowCount();  
  
    if(rows>0){  
  
        for(int i=0; i<rows; i++){  
  
            model.removeRow(0);  
  
        }  
  
    }  
  
}
```

```
private void jButton2ActionPerformed(java.awt.event.ActionEvent evt) {
```

```
    jButton1.doClick();  
  
    DefaultTableModel model=(DefaultTableModel)JTable2.getModel();  
  
    try{  
  
        Class.forName("java.sql.Driver");  
  
        con=DriverManager.getConnection("jdbc:mysql://localhost/school","root","opjs");  
  
    }  
  
}
```

```

Statement stmt=con.createStatement();

String s1=(String)JC1.getSelectedItem();

String s2=(String)JC2.getSelectedItem();

String s3=JTF1.getText();

String query="";

if(s1.equals("Grade") || s1.equals("Marks"))

    query="select * from student where "+s1+s2+s3+"";

else

    query="select * from student where "+s1+s2+""+s3+"";

//System.out.println(""+query);

rs=stmt.executeQuery(query);

while(rs.next()){

    model.addRow(new Object[]{

        rs.getString("admno"),rs.getString("name"),rs.getString("grade"),

        rs.getString("dob"),rs.getString("marks"),rs.getString("house"),

        rs.getString("gender"),rs.getString("emailid")

    });

}

}

catch(Exception e){

    JOptionPane.showMessageDialog(null, e.getMessage());

}

}

```

```

private void jButton3ActionPerformed(java.awt.event.ActionEvent evt) {

    new dashboard().setVisible(true);

    this.dispose();

}

```

