

## Cyclic Sort (easy)

### We'll cover the following ^

- Problem Statement
- Try it yourself
- Solution
- Code
  - Time complexity
  - Space complexity

## Problem Statement #

We are given an array containing 'n' objects. Each object, when created, was assigned a unique number from 1 to 'n' based on their creation sequence. This means that the object with sequence number '3' was created just before the object with sequence number '4'.

Write a function to sort the objects in-place on their creation sequence number in  $O(n)$  and without any extra space. For simplicity, let's assume we are passed an integer array containing only the sequence numbers, though each number is actually an object.

### Example 1:

```
Input: [3, 1, 5, 4, 2]
Output: [1, 2, 3, 4, 5]
```

### Example 2:


```
Input: [2, 6, 4, 3, 1, 5]
Output: [1, 2, 3, 4, 5, 6]
```

### Example 3:

```
Input: [1, 5, 6, 4, 3, 2]
Output: [1, 2, 3, 4, 5, 6]
```

## Try it yourself #

Try solving this question here:

 Java

 Python3

 JS

 C++

```
1 class CyclicSort {
2
3     public static void sort(int[] nums) {
4         // TODO: Write your code here
5     }
6 }
7
```

Test

Save Reset


## Solution #

As we know, the input array contains numbers in the range of 1 to 'n'. We can use this fact to devise an efficient way to sort the numbers. Since all numbers are unique, we can try placing each number at its correct place, i.e., placing '1' at index '0', placing '2' at index '1', and so on.

To place a number (or an object in general) at its correct index, we first need to find that number. If we first find a number and then place it at its correct place, it will take us  $O(N^2)$ , which is not acceptable.

Instead, what if we iterate the array one number at a time, and if the current number we are iterating is not at the correct index, we swap it with the number at its correct index. This way we will go through all numbers and place them in their correct indices, hence, sorting the whole array.

Let's see this visually with the above-mentioned Example-2:

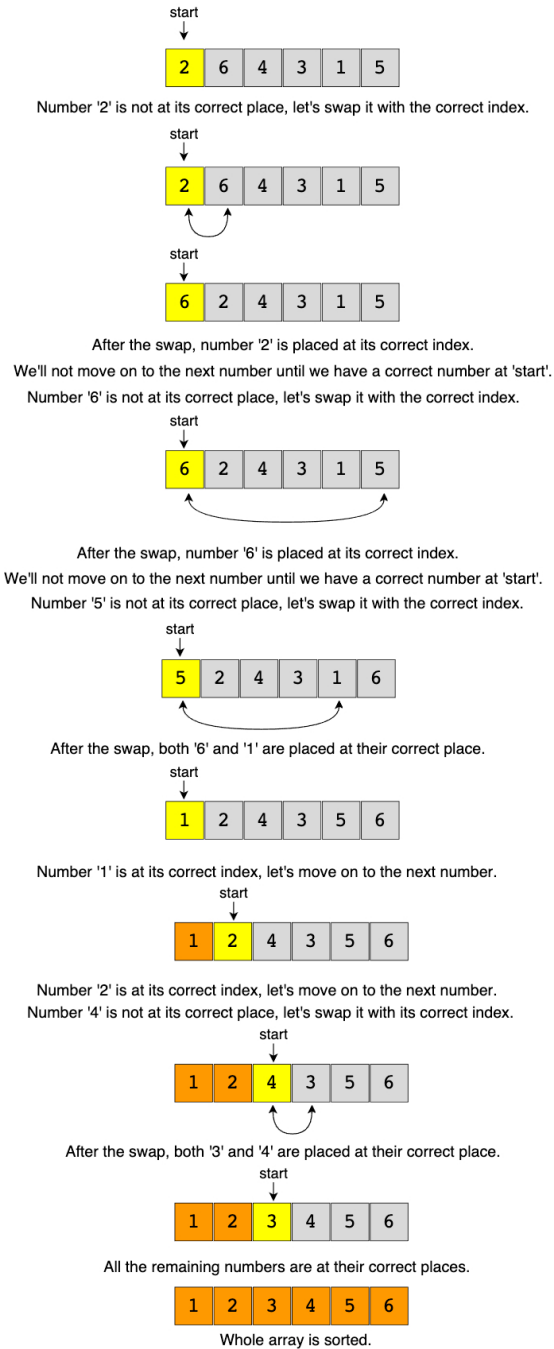

## Code #

Here is what our algorithm will look like:

Java

Python3

C++

JS

```

1 class CyclicSort {
2
3     public static void sort(int[] nums) {
4         int i = 0;
5         while (i < nums.length) {
6             int j = nums[i] - 1;
7             if (nums[i] != nums[j])
8                 swap(nums, i, j);
9             else
10                i++;
11        }
12    }
13
14    private static void swap(int[] arr, int i, int j) {
15        int temp = arr[i];
16        arr[i] = arr[j];
17        arr[j] = temp;
18    }
19

```

```
19
20 public static void main(String[] args) {
21     int[] arr = new int[] { 3, 1, 5, 4, 2 };
22     CyclicSort.sort(arr);
23     for (int num : arr)
24         System.out.print(num + " ");
25     System.out.println();
26
27     arr = new int[] { 2, 6, 4, 3, 1, 5 };
28     CyclicSort.sort(arr);

```

Run

Save

Reset

### Time complexity #

The time complexity of the above algorithm is  $O(n)$ . Although we are not incrementing the index `i` when swapping the numbers, this will result in more than 'n' iterations of the loop, but in the worst-case scenario, the `while` loop will swap a total of 'n-1' numbers and once a number is at its correct index, we will move on to the next number by incrementing `i`. So overall, our algorithm will take  $O(n) + O(n - 1)$  which is asymptotically equivalent to  $O(n)$ .

### Space complexity #

The algorithm runs in constant space  $O(1)$ .

[← Back](#)

Introduction

[Next →](#)

Find the Missing Number (easy)

☒ Mark as Completed

[Report an Issue](#) [Ask a Question](#)