


$G = (V, E)$


Images as nodes

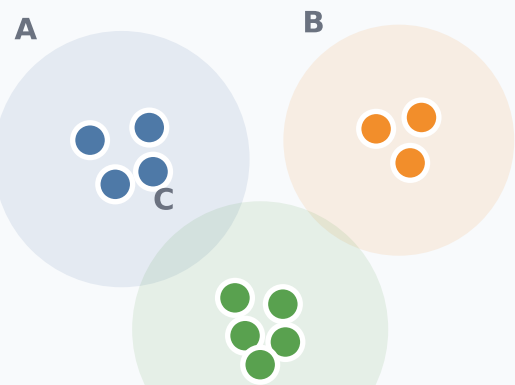

Connected components = individuals
(a) Unlabeled dataset

Re-ID model scores

$\hat{p}(u, v)$ (approx. match)

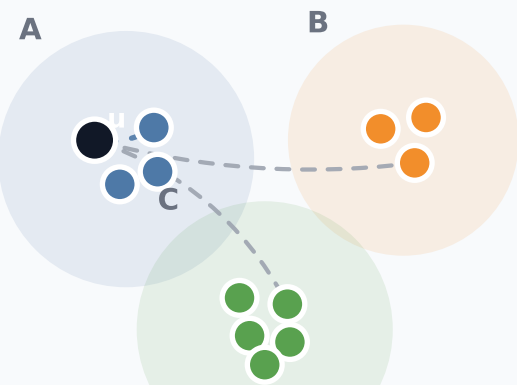


(b) Build proposal from scores

Sampling step 1

Pick $u \sim Q(u)$


Here: $Q(u) = 1/|V|$ (uniform)

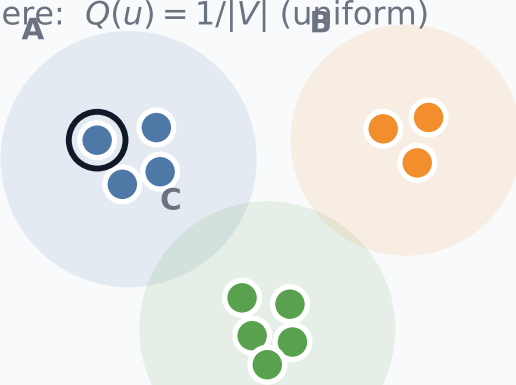

(c) Choose an anchor image

Sampling step 2

Pick $v \sim q(v|u) \propto \hat{p}(u, v)$

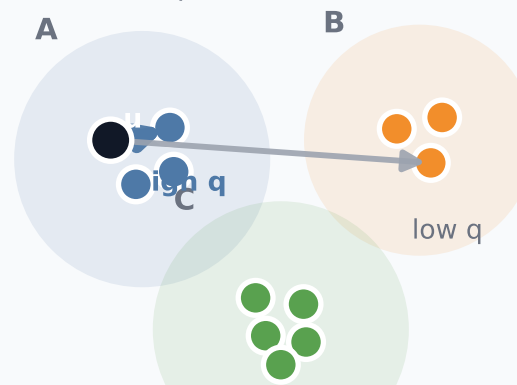

(d) Propose likely neighbors

Annotate & estimate

Human labels $y(u, v) \in \{0, 1\}$



Output: $\hat{K} \pm CI$

(e) Few queries, estimate K