Comprehende

Pay attention where it counts.

The agent writes the code. Comprehende gives you the *why* and the *what*.

Agents write faster than we can understand

- Pull requests list files alphabetically
- Tests pass, so we approve
- **Cognitive surrender.** No view of our own
- **Comprehension debt.** Invisible until something breaks

Hand off the code, keep the understanding

Surrender


- Agent decides what the change is
- No view of your own
- Approved, not understood

Offloading

- Agent writes the code
- You get the *why* and the *what*
- You check them against the diff

A review assistant for any git diff

- Your agent groups the changes by review concern
- Related groups stay together
- The UI shows each group next to the real diff

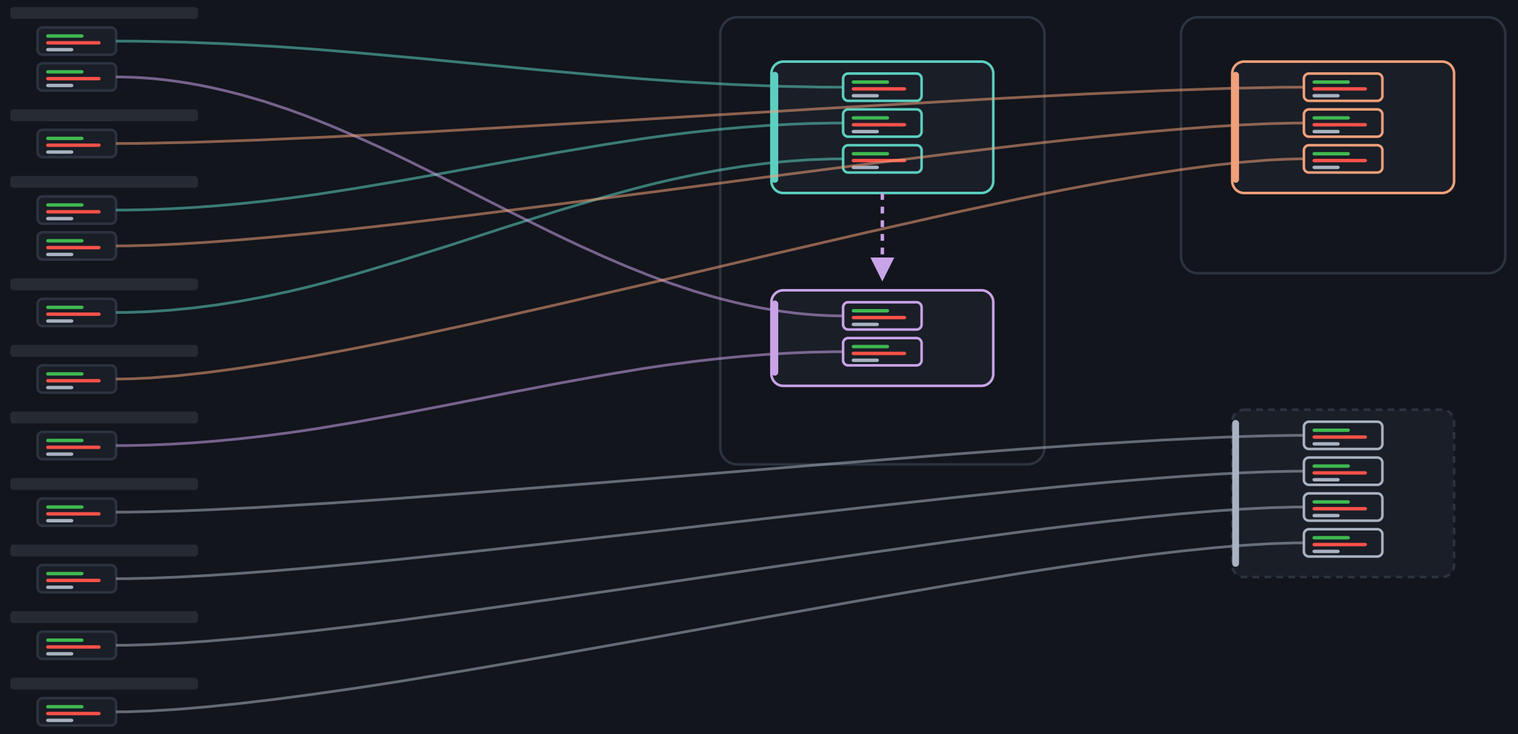

Who writes what

Git

- The diff
- Full files
- Blame

Your agent

- Groups
- Why and what
- Things to check
- Sources


Goals

- **Accuracy.** The diff comes from git
- **Coverage.** Every change is in a group
- **Fixed UI.** Only the data changes
- **Local.** No hosted service, no account
- **Plain words.** Simplified Technical English

Non-goals

- **Review for you.** Understanding stays your job
- **Judge.** No approve, reject, or score
- **Check every line.** You pick the focus, AI reviewers check them all
- **Replace git.** No stored patches
- **Know your tools.** Bitbucket, Jira, anything your agent can read
- **Generate UI.** The model never draws a screen

Start with the whole change

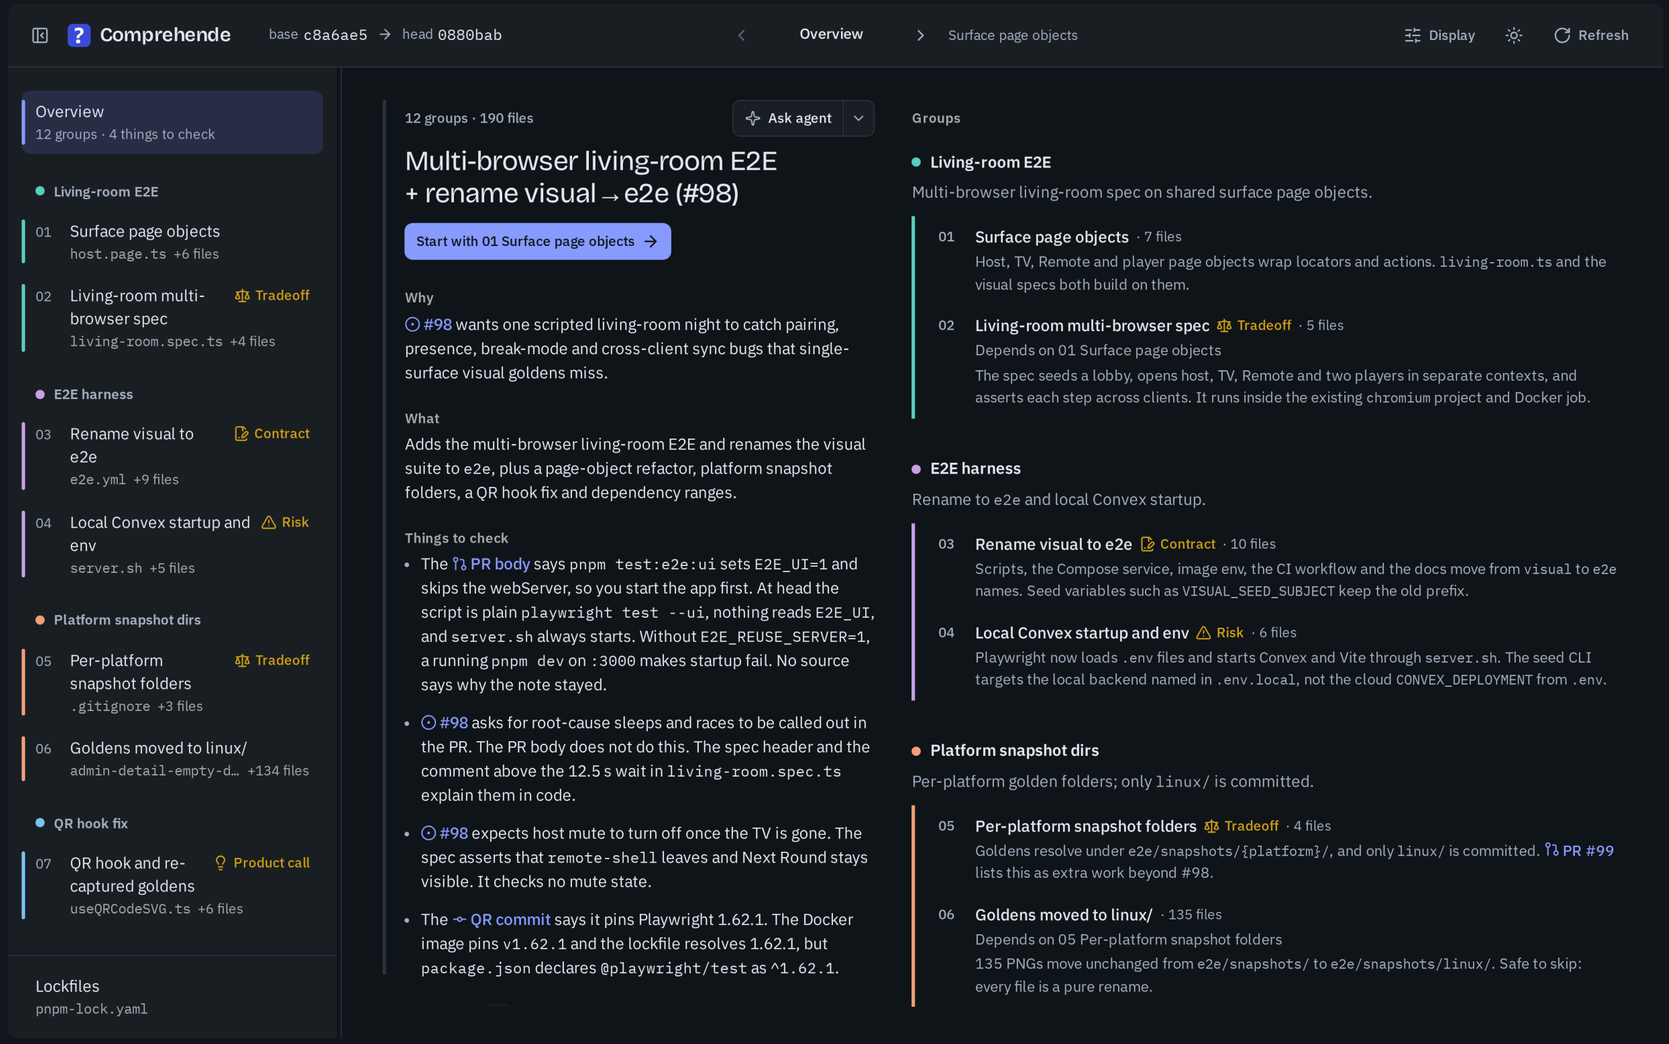

Start with the whole change

Why and what. Before any diff

> **Why**
>
> ⊙ #98 wants one scripted living-room night to catch pairing, presence, break-mode and cross-client sync bugs that single-surface visual goldens miss.
>
> **What**
>
> Adds the multi-browser living-room E2E and renames the visual suite to `e2e`, plus a page-object refactor, platform snapshot folders, a QR hook fix and dependency ranges.

Start with the whole change

Things to check. Where code and sources disagree

Things to check

- The PR body says `pnpm test:e2e:ui` sets `E2E_UI=1` and skips the webServer, so you start the app first. At head the script is plain `playwright test --ui`, nothing reads `E2E_UI`, and `server.sh` always starts. Without `E2E_REUSE_SERVER=1`, a running `pnpm dev` on `:3000` makes startup fail. No source says why the note stayed.
- #98 asks for root-cause sleeps and races to be called out in the PR. The PR body does not do this. The spec header and the comment above the 12.5 s wait in `living-room.spec.ts` explain them in code.

Start with the whole change

Reading order. Groups, split into parts

Groups

- **Living-room E2E**

  Multi-browser living-room spec on shared surface page objects.

  01 **Surface page objects** · 7 files

  Host, TV, Remote and player page objects wrap locators and actions. `living-room.ts` and the visual specs both build on them.

  02 **Living-room multi-browser spec** ⚖ Tradeoff · 5 files


  Depends on 01 Surface page objects

  The spec seeds a lobby, opens host, TV, Remote and two players in separate contexts, and asserts each step across clients. It runs inside the existing `chromium` project and Docker job.

- **E2E harness**

  Rename to `e2e` and local Convex startup.

Then one group at a time

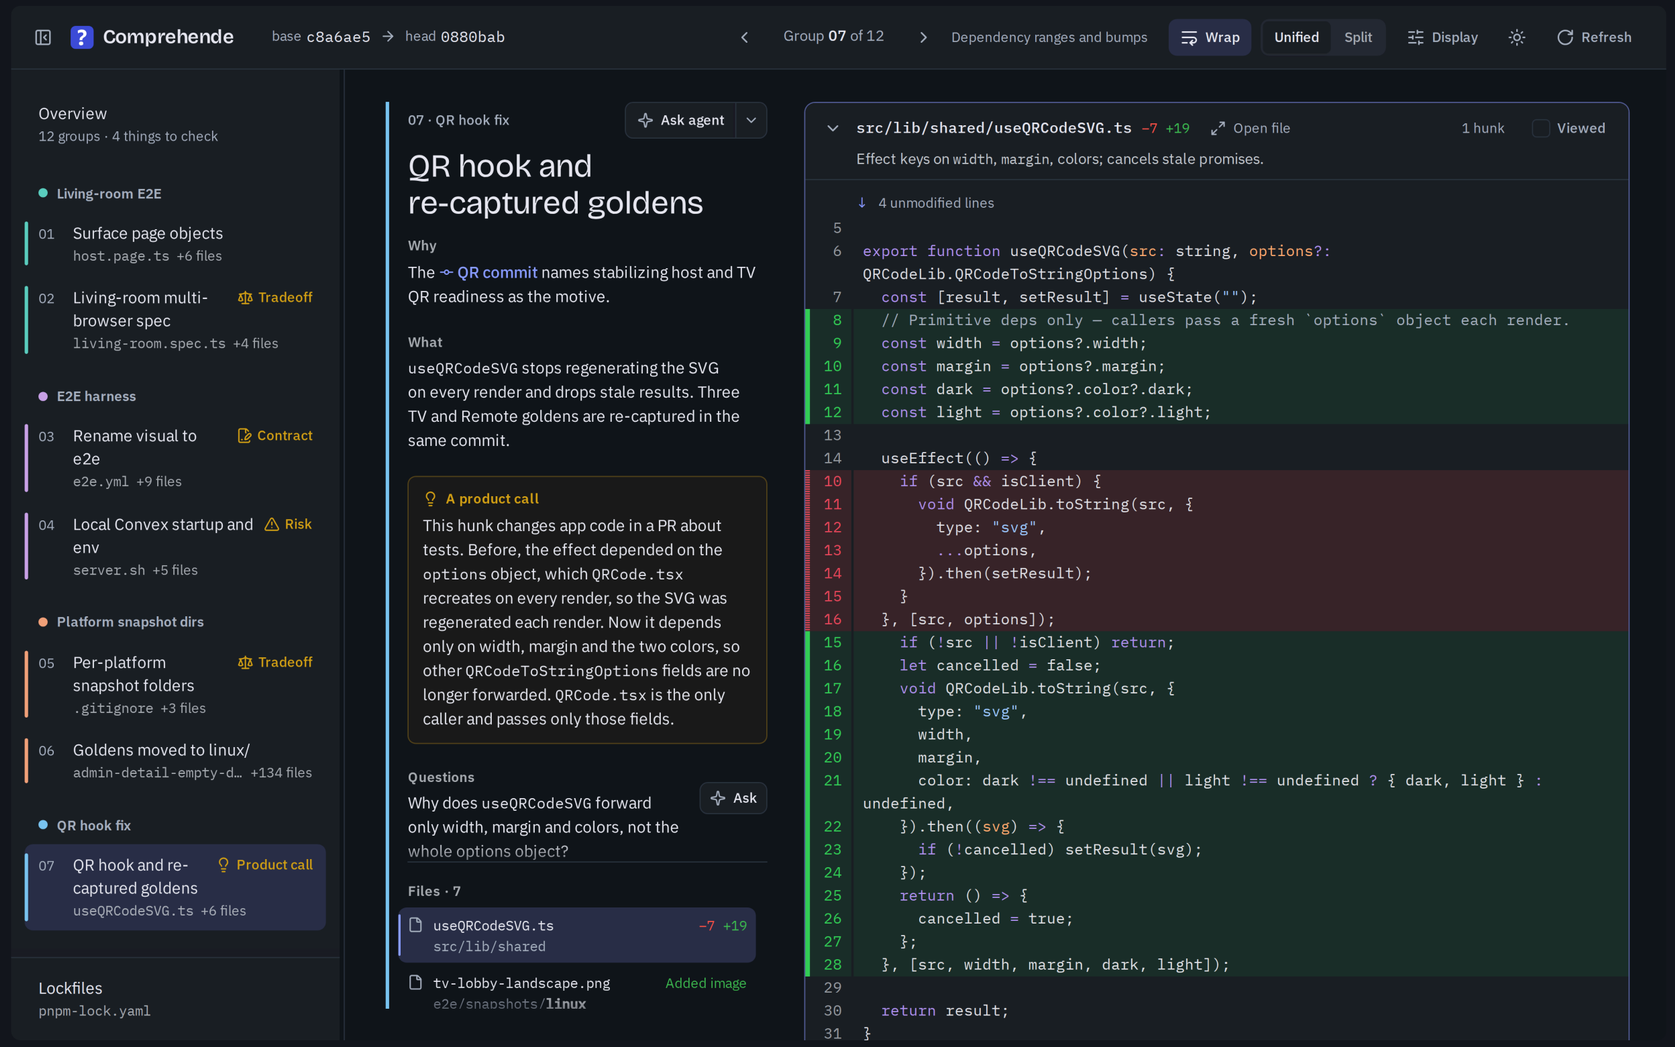

Then one group at a time

One concern. Why it exists, what it does

07 · QR hook fix

Ask agent

QR hook and re-captured goldens

Why

The QR commit names stabilizing host and TV QR readiness as the motive.

What

`useQRCodeSVG` stops regenerating the SVG on every render and drops stale results. Three TV and Remote goldens are re-captured in the same commit.

Then one group at a time

Attention. The one call only you can make

A product call

This hunk changes app code in a PR about tests. Before, the effect depended on the `options` object, which `QRCode.tsx` recreates on every render, so the SVG was regenerated each render. Now it depends only on width, margin and the two colors, so other `QRCodeToStringOptions` fields are no longer forwarded. `QRCode.tsx` is the only caller and passes only those fields.

Then one group at a time

The real diff. With a note on each file


src/lib/shared/useQRCodeSVG.ts −7 +19 Open file 1 hunk Viewed

Effect keys on `width`, `margin`, colors; cancels stale promises.

↓ 4 unmodified lines


```
5
6  export function useQRCodeSVG(src: string, options?:
   QRCodeLib.QRCodeToStringOptions) {
7    const [result, setResult] = useState("");
8    // Primitive deps only — callers pass a fresh `options` object each render.
9    const width = options?.width;
10   const margin = options?.margin;
11   const dark = options?.color?.dark;
12   const light = options?.color?.light;
13
14   useEffect(() => {
```

Go past the diff

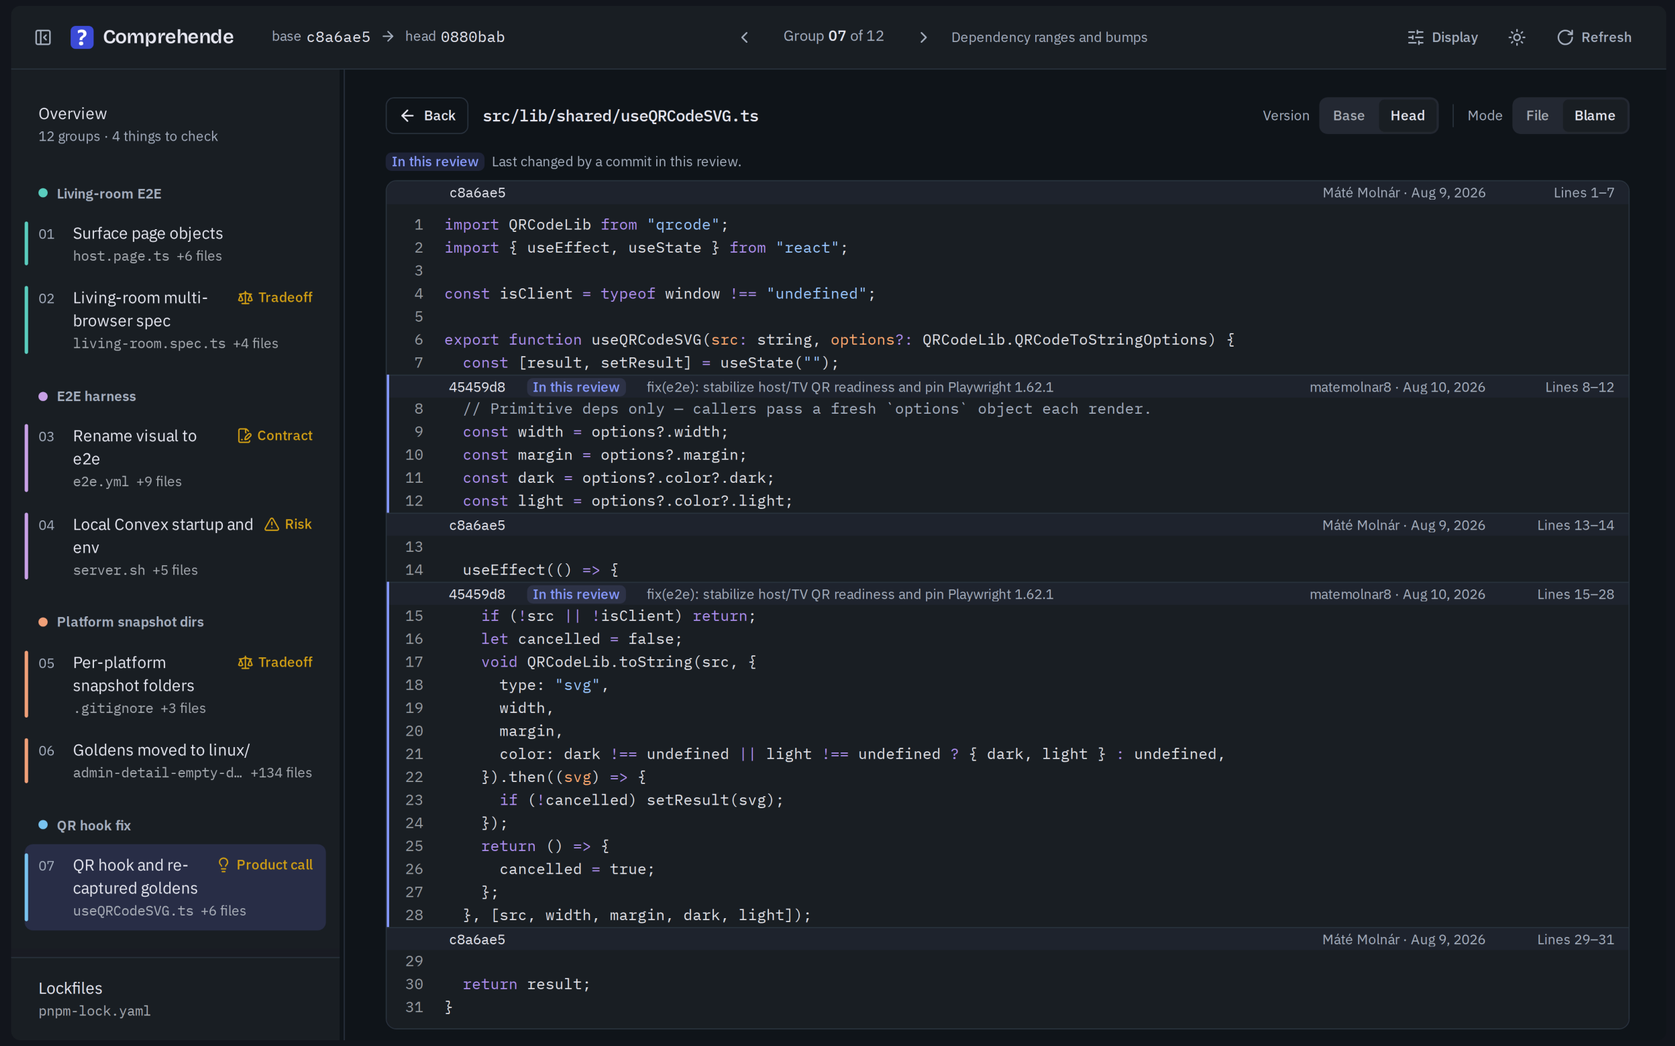

Go past the diff

Full file or blame. At base or head

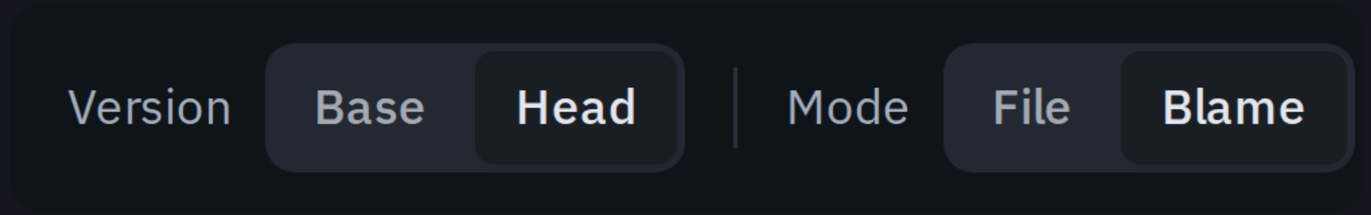

Go past the diff

Blame. Commit, author, date

c8a6ae5 — Máté Molnár · Aug 9, 2026 — Lines 1–7

```
1  import QRCodeLib from "qrcode";
2  import { useEffect, useState } from "react";
3
4  const isClient = typeof window !== "undefined";
5
6  export function useQRCodeSVG(src: string, options?: QRCodeLib.QRCodeToStringOptions) {
7    const [result, setResult] = useState("");
```

45459d8 **In this review** fix(e2e): stabilize host/TV QR readiness and pin Playwright 1.62.1 — matemolnar8 · Aug 10, 2026 — Lines 8–12

```
8    // Primitive deps only — callers pass a fresh `options` object each render.
9    const width = options?.width;
10   const margin = options?.margin;
11   const dark = options?.color?.dark;
12   const light = options?.color?.light;
```

Go past the diff


In this review. Commits from this change

45459d8 In this review fix(e2e): stabilize host/TV QR readiness and pin Playwright 1.62.1

```
 8    // Primitive deps only — callers pass a fresh `options` object each render.
 9    const width = options?.width;
10    const margin = options?.margin;
11    const dark = options?.color?.dark;
12    const light = options?.color?.light;
```

Also in the UI

- **Focus and notes.** Key lines open first
- **Ask agent.** Send a question to your coding agent
- **Sources.** Tickets, comments, commits, transcripts
- **Refresh.** Keeps groups, shows what changed
- **Mechanical groups.** Renames and generated files to skip
- **Images.** Side by side, slider, pixel diff
- **Keyboard.** `[` `]` groups, `j` `k` files, `v` viewed
- **Links.** Every view has a URL
- **Any screen.** Phone, light, dark

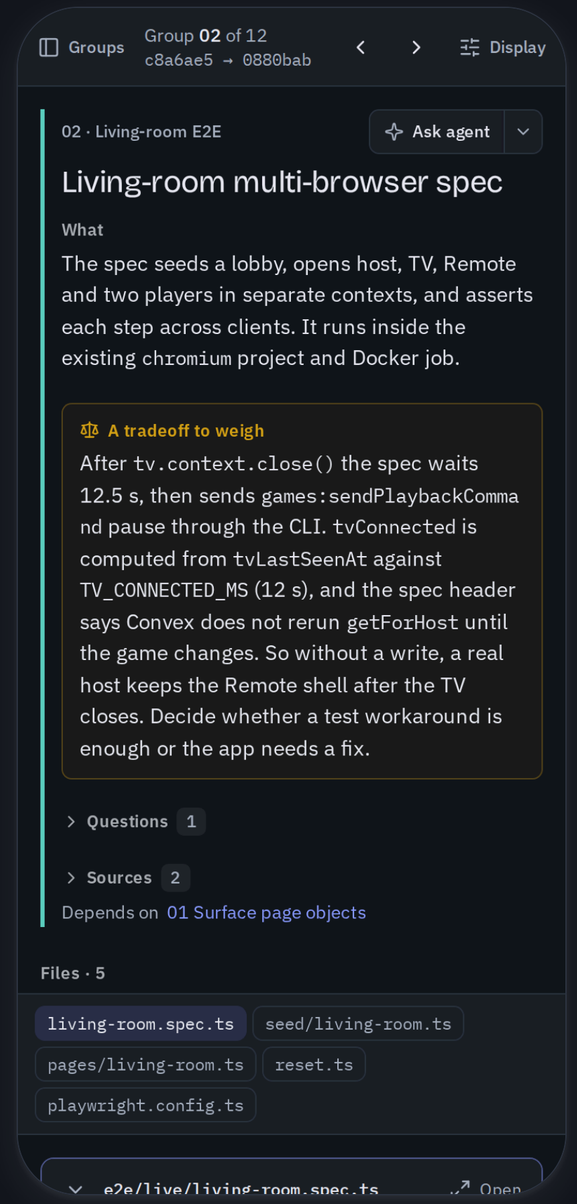

Live demo

VitaDeck PR #144, 14 groups

Same PR, nine reviews

VitaDeck PR #144, 110 files. One run each, skill 0.13.4. List prices.

Model	Effort	Groups	Parts	Attentions	Time	Input	Cached	Output	Price
Haiku 5.5	Medium	18	6	4	9m 12s	410K	4.35M	113K	$0.82
	High	18	6	5	12m 36s	430K	9.96M	145K	$1.20
Sonnet 5.5	Low	8	0	2	2m 11s	97K	1.57M	15K	$0.69
	High	16	3	8	8m 38s	244K	4.50M	60K	$2.03
Opus 5.5	Low	13	7	6	5m 40s	176K	3.60M	24K	$2.60
	High	14	5	9	12m 9s	370K	5.40M	65K	$5.34
Grok 4.7	Low	8	0	2	7m 10s	122K	1.86M	25K	$1.32
	High	10	2	2	24m 22s	584K	7.90M	106K	$5.94
Muse Wonder 1.0	High	14	4	3	3m 13s	145K	1.79M	25K	$1.44

Fresh sessions here. Usually it runs in the coding thread and reads that thread as a source.

Install and use

```
# once, in any repo
npx skills add matemolnar8/comprehende

# in your coding agent, name what to review
/comprehende PR 154
/comprehende the commits from the last turn
/comprehende feature/auth against main
```

Needs Node.js 24+ and git, on macOS, Linux, or Windows.



Understanding is the part you cannot delegate.

The agent writes the code. You keep the why and the what.

```
npx skills add matemolnar8/comprehende
```

github.com/matemolnar8/comprehende