

APLIKACJE WEBOWE

Documenting Change

L0 

by ***Mateusz Węglewski***




APLIKACJE WEBOWE

REST API

A **REST API** (Representational State Transfer Application Programming Interface) is **an architectural style that allows different software applications to communicate with each other over the internet**. It serves as a standardized bridge between a **client** (like a mobile app or web browser) and a **server** (where data is stored), allowing them to exchange information securely and predictably. Google Cloud +4



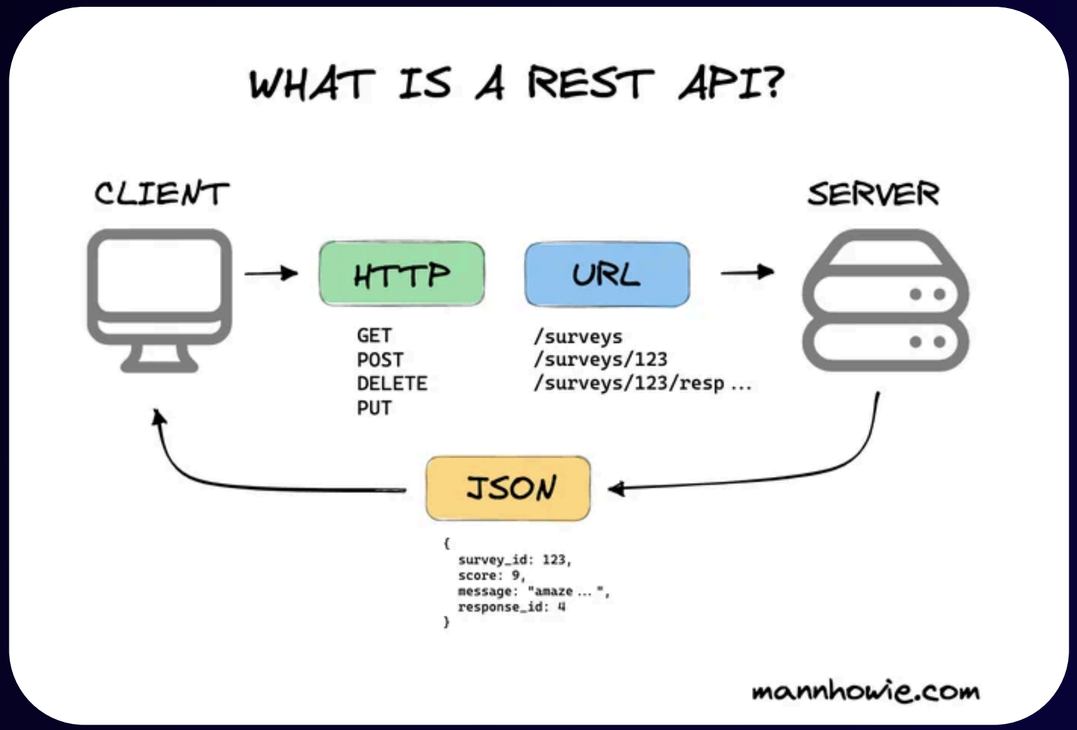

REpresentation **S**tate **T**ransfer
Application **P**rogram **I**nterface

LO



by ***Mateusz Węglewski***

endpoint



a specific URL where an API can be accessed — punkt końcowy API

by ***Mateusz Węglewski***


request body



data sent by the client to the server in an HTTP request — treść żądania

by ***Mateusz Węglewski***


response

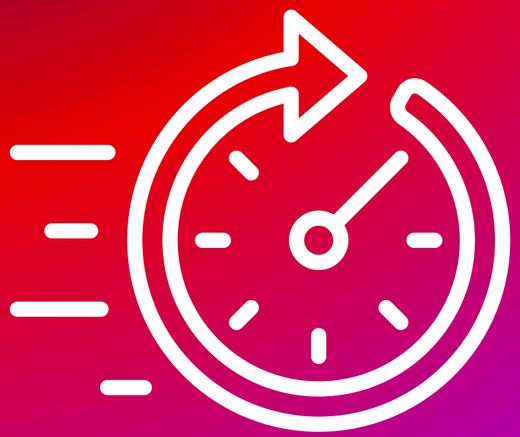

data returned by the server to the client — odpowiedź serwera

by **Mateusz Węglewski**

payload

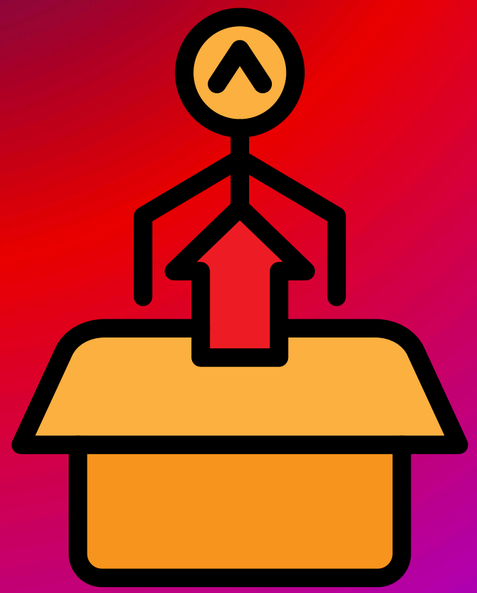

the actual data transmitted in a request or response — dane przesyłane w żądaniu / odpowiedzi

by ***Mateusz Węglewski***

query parameter



a value appended to a URL after "?" to filter or modify a request — parametr zapytania

by ***Mateusz Węglewski***

status code



a three-digit number indicating the result of an HTTP request — kod statusu HTTP

by ***Mateusz Węglewski***

authentication



verifying who a user is (e.g. via a token) — uwierzytelnianie

NIGDY NIE AUTENTYKACJA,
*taki termin **NIE ISTNIEJE** w języku polskim*

by ***Mateusz Węglewski***

authorization



verifying what an authenticated user is allowed to do — autoryzacja, nadawanie uprawnień

by ***Mateusz Węglewski***



APLIKACJE WEBOWE

idempotent



an operation that produces the same result no matter how many times it's repeated — idempotentny



by ***Mateusz Węglewski***

middleware



a function that processes requests before they reach the final handler — oprogramowanie pośredniczące

by ***Mateusz Węglewski***

dependency



an external package or library required by the application — zależność (biblioteka)

by ***Mateusz Węglewski***



APLIKACJE WEBOWE

deprecated



no longer recommended for use and likely to be removed in a future release — przestarzały, wycofywany

by ***Mateusz Węglewski***

breaking change



a change that makes existing client code stop working correctly
— zmiana łamiąca kompatybilność

by **Mateusz Węglewski**

backward compatible



working correctly with previous versions of the software — kompatybilny wstecznie

by ***Mateusz Węglewski***




extra rework caused by choosing a quick fix over a better long-term solution — dług techniczny

by ***Mateusz Węglewski***

HTTP


HTTP (Hypertext Transfer Protocol) is the foundational protocol used to **transfer data across the World Wide Web**. It operates on a client-server model, allowing web browsers to request and load websites, images, and videos from remote servers.



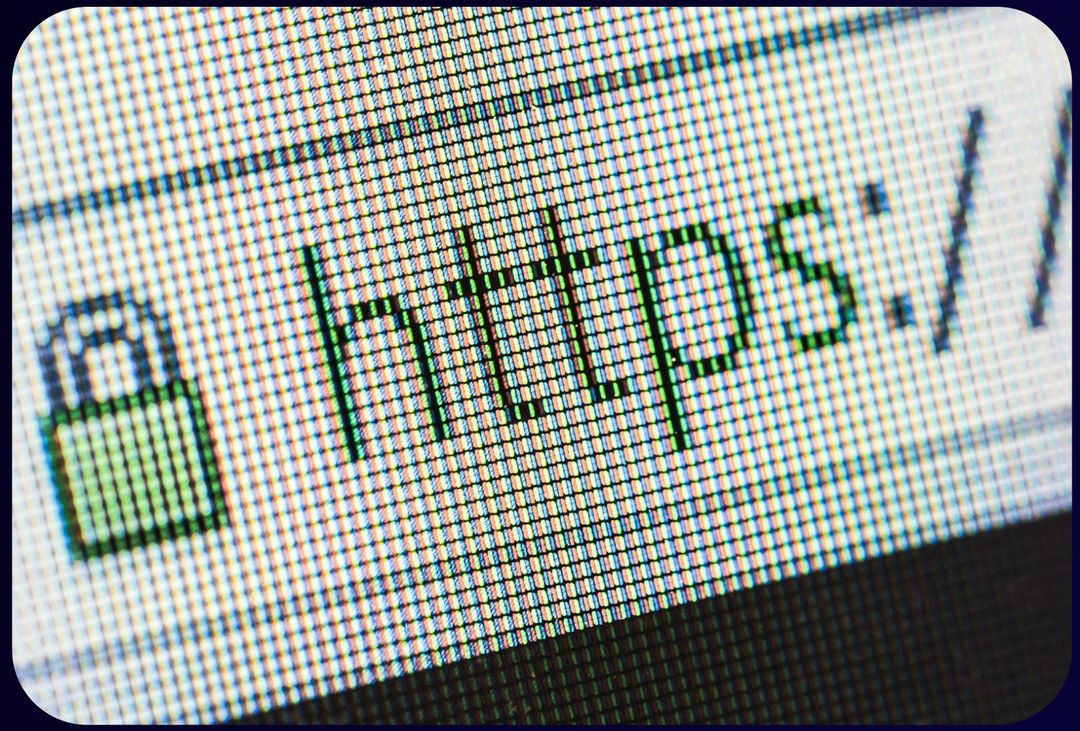

Hyper**T**ext **T**ransfer **P**rotocol

by ***Mateusz Węglewski***

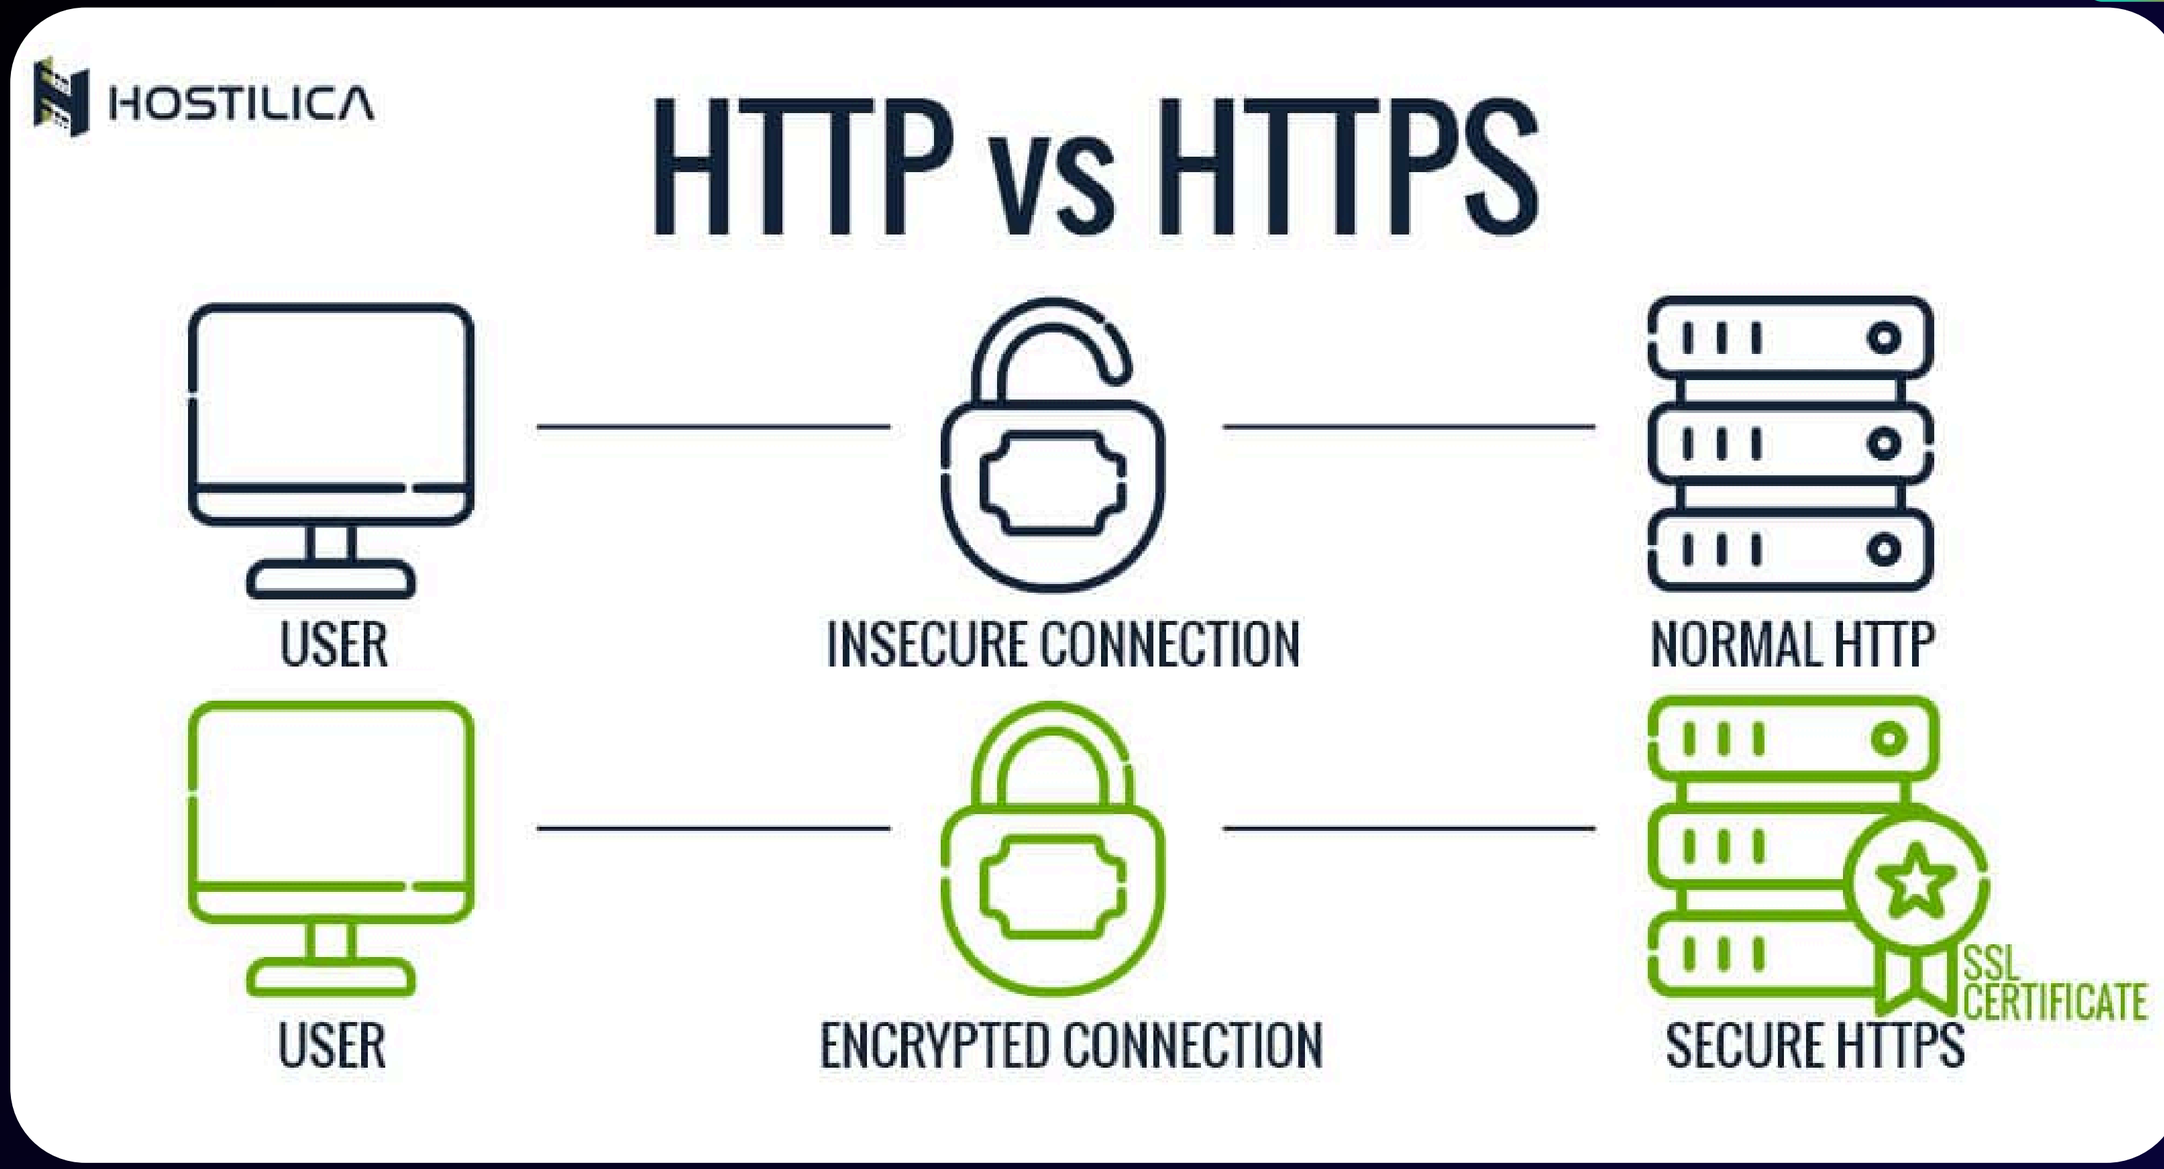
HOSTILICA
HTTP vs HTTPS
USER
INSECURE CONNECTION
NORMAL HTTP
USER
ENCRYPTED CONNECTION
SSL CERTIFICATE
SECURE HTTPS

HTTP Status Codes

APLIKACJE WEBOWE

2XX

SUCCESS

4XX

CLIENT ERRROR

5XX

SERVER ERRROR

by *Mateusz Węglewski*



HTTP Status Codes

APLIKACJE WEBOWE

Kod	Nazwa	Kategoria	Znaczenie
200	OK	2xx	The request succeeded; the standard success response.
201	Created	2xx	The request succeeded and a new resource was created.
400	Bad Request	4xx	The server can't process the request (e.g. malformed JSON).
401	Unauthorized	4xx	Authentication is missing or invalid.
403	Forbidden	4xx	Authenticated, but not allowed to perform this action.
404	Not Found	4xx	The requested resource doesn't exist.
409	Conflict	4xx	The request conflicts with the current state (e.g. duplicate).
500	Internal Server Error	5xx	A generic error on the server side.



by **Mateusz Węglewski**

Commits

In coding and version control, a **commit** is a permanently saved snapshot of your project's files at a specific point in time. Think of it as a **digital "save point"** in a video game; if you make a mistake later, you can instantly roll back your codebase to this exact moment. W3Schools +2

```
$ git commit -m "first commit"
[master (root-commit) 5a457ea] first commit
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 file.txt
```



by **Mateusz Węglewski**

Coventional Commits

APLIKACJE WEBOWE

kategoria zmiany, np. feat, fix, docs (pełna lista — kolejny slajd)

scope (opcjonalny) — moduł, którego dotyczy zmiana, np. feat(auth)

```
<type>[optional scope]: <description>

[optional body]
[optional footer(s)]
```

description — krótki opis w czasie teraźniejszym, bez kropki na końcu

! po type/scope lub stopka BREAKING CHANGE: — oznacza zmianę łamiącą kompatybilność

by *Mateusz Węglewski*



Commit types

APLIKACJE WEBOWE

Typ	Znaczenie	Przykład
feat	a new feature for the user (correlates with MINOR in SemVer)	`feat(auth): add password-reset endpoint`
fix	a bug fix (correlates with PATCH in SemVer)	`fix(tasks): return 409 instead of 500 on duplicate title`
docs	documentation only changes	`docs(readme): document POST /api/tasks`
style	formatting changes that don't affect meaning (whitespace, semicolons)	`style(tasks): apply prettier formatting`
refactor	a code change that neither fixes a bug nor adds a feature	`refactor(tasks): extract validation into middleware`





Commit types

APLIKACJE WEBOWE

Typ	Znaczenie	Przykład
perf	a code change that improves performance	`perf(tasks): add index on due_date field`
test	adding or correcting tests	`test(tasks): add unit tests for creation endpoint`
build	changes to the build system or external dependencies	`build(deps): bump express to 4.19.2`
ci	changes to CI configuration files and scripts	`ci: run test suite on pull requests`
chore	other changes that don't modify src or test files	`chore: update .gitignore`

Coventional Commits

APLIKACJE WEBOWE



Dr Pigeon
DevOps
Change ID: 2137

ci(docker): add container clean-up script

This script (*cleanup.sh*) removes the container and its network before the container itself is stopped.

by ***Mateusz Węglewski***

Exercise – commits

#	Oryginalny commit	Problem
1	`"fixed stuff"`	No type, no scope, no indication of what was actually fixed — impossible to search or generate a changelog from this.
2	`"added new thing for task priority, also updated readme and fixed a small bug in the tags field"`	Three unrelated changes bundled into a single commit — should be split into three separate, atomic commits.
3	`"poprawki w kontrolerze tasks"`	Written in Polish and too vague — commit messages in international projects are written in English and describe the change precisely.
4	`"WIP"`	"Work in progress" markers belong in a draft pull request title, not in the permanent commit history of the main branch.

by ***Mateusz Węglewski***



Exercise – commits

APLIKACJE WEBOWE

#1

```
fix(tasks): correct due-date validation for past dates
```

#2

```
feat(tasks): add priority field to task model
docs(readme): document the priority field
fix(tasks): correct tags array validation
```

#3

```
refactor(tasks): simplify controller error handling
```

#4

```
feat(tasks): add initial task filtering by status
```






APLIKACJE WEBOWE

Changelog

A changelog is a curated, chronologically ordered file that contains a summary of notable changes made to a project during each release. While a commit history logs every single technical change, a changelog translates those technical updates into a clean, human-readable format for users, customers, or other stakeholders.

9.1.0 (2020-03-25)

Release Highlights

To learn about the release highlights and our CLI-powered automated update workflow for your projects please check out the v9.1 release announcement.

- TypeScript 3.8 update
- ngcc improvements
  - performance optimizations
  - concurrency & reliability improvements for monorepo use-cases (npm postinstall script no longer recommended)
- i18n now supports RTL locale info
- Ivy compatibility fixes

Features

- **bazel:** enable ivy template type-checking in g3 (#35672) (8f5b7f3)
- **bazel:** transform generated shims (in Ivy) with tsickle (#35975) (e3ecdc6), closes #35848
- **compiler-cli:** implement NgTscPlugin on top of the NgCompiler API (#34792) (3c69442dbd)
- **compiler:** Add sourceSpan and keySpan to TemplateBinding (#35897) (06779cf)
- **compiler:** Propagate source span and value span to Variable AST (#36047) (31bec8c)
- **compiler:** add dependency info and ng-content selectors to metadata (#35695) (fb70083)
- **language-service:** improve non-callable error message (#35271) (acc483e)
- **language-service:** modularize error messages (#35678) (47a1811), closes #32663
- **ngcc:** implement source-map flattening (#35132) (df816c9)
- **ngcc:** pause async ngcc processing if another process has the lockfile (#35131) (eef0753)





JSDoc

JSDoc is a markup language used to annotate JavaScript source code files. It allows developers to add documentation directly inside code comments, which can then be read by code editors or used to automatically generate an HTML documentation website.

```
/**
 * Registers a new pet into the Pet Adoption Center.
 *
 * @memberOf Pets
 * @param {Pets.Pet} pet - The pet.
 * @returns {Promise<Transactions.TransactionResponse>} Details abo
 * @example
 * const sdk = require('pet-adoption-center');
 *
 * const transaction = sdk.pets.register({
 *     name: 'Atticus',
 *     type: sdk.PET_TYPES.DOG,
 *     breed: sdk.DOG_BREEDS.FRENCH_BULLDOG,
 *     dateOfBirth: '2010-03-10',
 *     neutered: false
 * });
 */
register: async function (pet : Pets.Pet ) {
    return {
        success: true,
        transactionId: '1234-5678-90',
        data: {
            // Placeholder for the pet object
        }
    };
},
```




by **Mateusz Węglewski**

README

A README file is a text document that introduces and explains a software project, data set, or code repository. It acts as the "front door" of a project, serving as the primary guide for users and developers to understand what the project does and how to get started.



```
                                  _   _ ____  _
                              ___| | | |  _ \| |
                             / __| | | | |_) | |
                            | (__| |_| |  _ <| |___
                             \___|\___/|_| \_\_____|

README

  Curl is a command line tool for transferring data specified with URL
  syntax. Find out how to use curl by reading the curl.1 man page or the
  MANUAL document. Find out how to install Curl by reading the INSTALL
  document.

  libcurl is the library curl is using to do its job. It is readily
  available to be used by your software. Read the libcurl.3 man page to
  learn how!

  You find answers to the most frequent questions we get in the FAQ document.

  Study the COPYING file for distribution terms.

  Those documents and more can be found in the docs/ directory.

CONTACT

  If you have problems, questions, ideas or suggestions, please contact us
  by posting to a suitable mailing list. See https://curl.se/mail/

  All contributors to the project are listed in the THANKS document.

WEBSITE

  Visit the curl website for the latest news and downloads:

        https://curl.se/
```


by ***Mateusz Węglewski***



Change Categories

APLIKACJE WEBOWE

ADDED

for new features

CHANGED

for changes in existing functionality

DEPRECATED

for soon-to-be removed features

REMOVED

for now removed features

FIXED

for any bug fixes

SECURITY

in case of vulnerabilities



by ***Mateusz Węglewski***



Changelog

APLIKACJE WEBOWE

```
## [1.4.0] - 2026-07-19

### Added
- Tasks can now be assigned a priority (low, normal, high).

### Fixed
- Creating a task with a duplicate title now returns 409 instead of
  crashing the server with a 500 error.
```


by ***Mateusz Węglewski***



JSDoc

APLIKACJE WEBOWE

```
/**
 * Creates a new task for the currently authenticated user.
 *
 * @param {string} req.body.title - Title of the task (must be unique per user).
 * @param {string} req.body.dueDate - ISO 8601 due date for the task.
 * @param {string} [req.body.priority='normal'] - Task priority.
 * @returns {201} Task created — returns id, title, and status.
 * @throws {409} A task with this title already exists for this user.
 */
```




by **Mateusz Węglewski**



README

APLIKACJE WEBOWE

```
### POST /api/tasks

Creates a new task for the authenticated user.

**Request body:**
{ "title": string, "dueDate": string, "priority": string }

**Success response:** 201 Created
{ "id": string, "title": string, "status": "open" }

**Error response:** 409 Conflict — a task with this title already
exists for the current user.
```




by ***Mateusz Węglewski***



APLIKACJE WEBOWE

:wq

L0



by ***Mateusz Węglewski***