

Prediction of short-term success of electrical cardioversion

Lazar Vasović Ana Jakovljević

Faculty of Mathematics, University of Belgrade
<https://github.com/matfija/Elektrokonverzija>

May 20, 2021

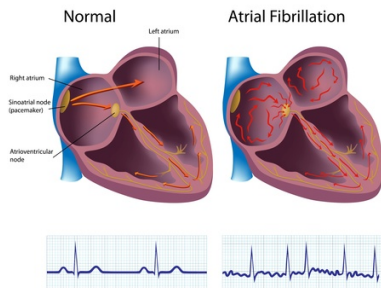


Table of contents

- 1 Introduction
- 2 Dataset
- 3 Bayesian networks
- 4 Other models
- 5 Conclusion

The problem

- Electrical cardioversion is a medical technique that uses synchronized electrical shocks to restore normal heart rhythm in people with persistent arrhythmia.
- This kind of heart rate problem is usually associated with a disease called atrial fibrillation.



Goals and methods

- The aim of this paper was to create a classification model that accurately predicts whether the procedure will be successful in the short term, based on data on the clinical picture, other indications, and drug therapy prescribed to patients undergoing it.
- The focus was initially on Bayesian networks, a well-known probabilistic graphical model. They, however, proved inferior to other methods of classification and machine learning, such as the random forest classifier and artificial neural networks.

Methods (cont.)

- Fitted models were compared by their accuracy, sensitivity (recall), specificity, and other relevant metrics.
- Extra attention was given to data preprocessing and exploratory analysis, as well as predictor (feature) importance.



Dataset

- Dataset consists of 147 unique instances and was obtained from the Pacemaker Center of the Clinical Center of Serbia.
- It pertains to electrical cardioversions performed from 2014 to 2019.
- Several groups of attributes – basics (age, sex...), baseline (clinical picture and other indications), drug therapy (and other), cardioversion data, other irrelevant data (patient status after the procedure).


Preprocessing

- Dataset contained many irrelevant, mixed and missing values.
- Removed – cardioversion date, medical record number, number in database...
- Missing values – special value (-1) and neighborhood mean imputation
- Mixed data types – numerical transformation (e.g. if column represents number of months, then 2 is OK, but 5mes \rightarrow 5 and 1god \rightarrow 12)





Target class

- Even though the recurrence rate of atrial fibrillation is very high, most cardioversions are initially successful.
- Successful procedures (88.4 %) were marked as class True and unsuccessful (11.6 %) as class False.



Separability

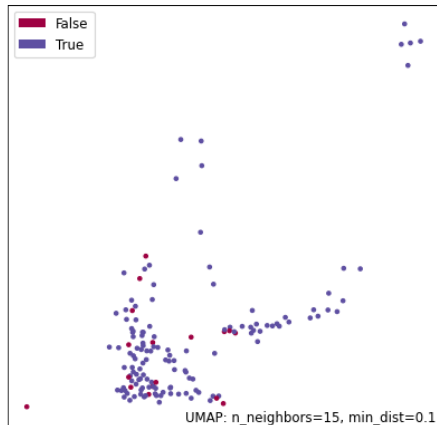
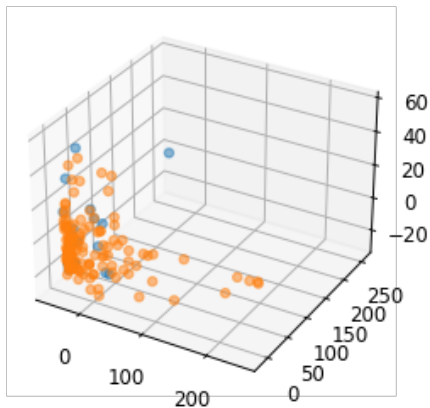


Feature importance

- Something old:
 - domain knowledge – date irrelevant
- Something new:
 - low correlation with target attribute
 - high rate of missing values
 - low variance – no information
 - high correlation – doubled info
- Something borrowed:
 - model predictor importance – later
- Something blue:
 - dendrogram and heatmap – stay tuned



Correlation dendrogram

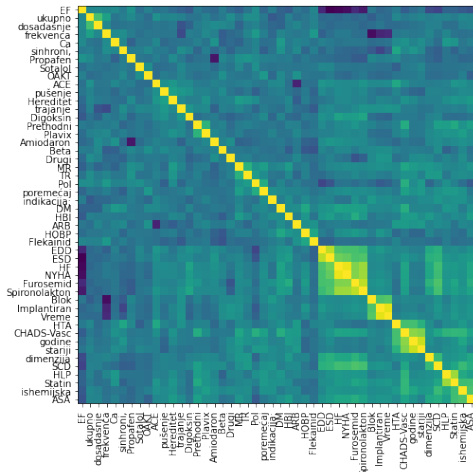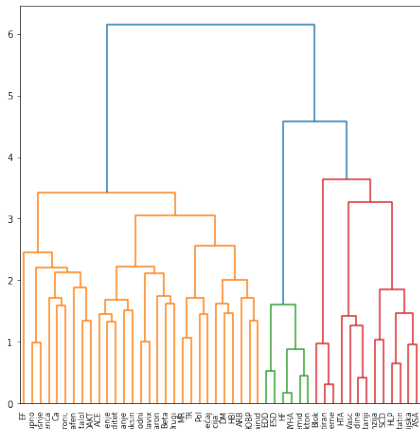

To sum up


- At the end, dataset dimensions are 147×49 .
- All input variables are of integer type, with no missing values, while target class is boolean, with somewhat inverted modalities.
- Dataset is imbalanced with concern to target class.
- This is, of course, a binary classification problem.
- According to PCA and UMAP, this seems like a hard problem.
- It is possible to reduce dimensionality, if needed.

Bayesian networks

- Bayesian networks are a well-known probabilistic graphical model.
- Simply put, BN is a directed acyclic graphs of attributes (vertices), and belief is propagated through its edges.
- Discrete form – each vertex stores conditional probability distribution table of its attribute, given attributes of its parents
- Inference – starts from known attributes, then propagates to target

Binning


- All data is already discrete; however, it had to be discretized even more to get a good Bayesian network.
- For example, there is only one patient under 30, and his procedure failed. This doesn't mean that youth is a risk factor. Solution – bin ages < 30 , then $30 - 39$, $40 - 49$...

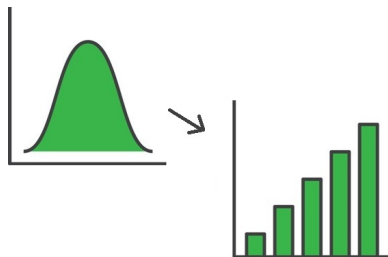



Naïve Bayes

- Specific graph structure of the network, such that its branches are directed exclusively from the target to the input attributes.
- All such branches exist, and no other.
- Implication – all input variables are independent, given target.
- Very simple, but totally underfitted – every procedure is predicted as successful, which is equal to absolutely naïve (dummy) classifier.

Model graph

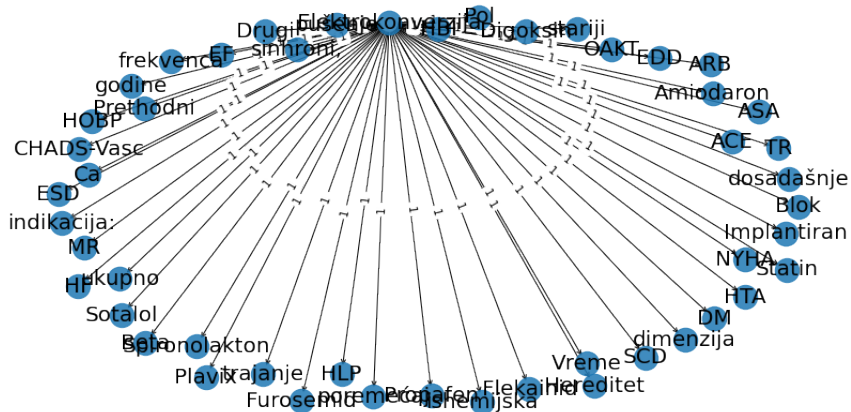


Test performance

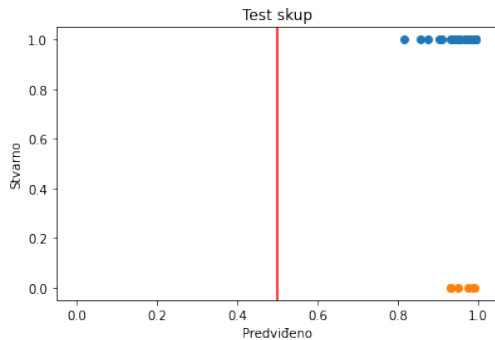



Strucutre learning

- Hill climbing is used as the optimization technique for computing the best model graph.
- Several scoring measures, including Bayesian information criterion
- This model is much better on training partition, but it is still bad at test partition, which means it is overfitted.

Model graph

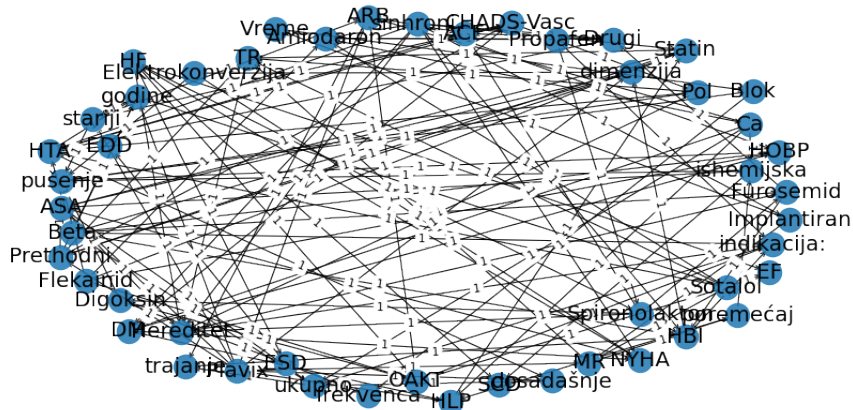


Test performance

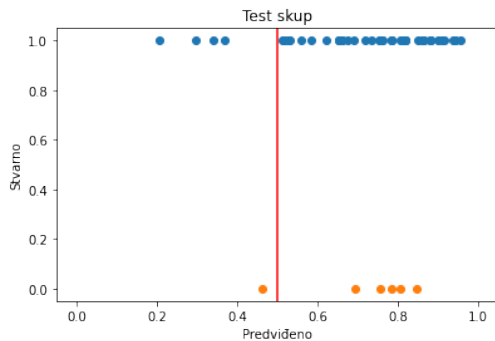



Fixed edges

- Some edges can be fixed before the start of hill climbing optimization.
- It is most sensible to fix edges of type input \rightarrow target.
- Model predictor importance (decision tree, random forest...) and dedrogram helped in finding the best combination.
- First try – patient age, heart rate, total duration of the indicated heart disease, ejection fraction
- Second try – heart rate on admission, oral anticoagulant therapy, left atrial diameter, ejection fraction

Model graph

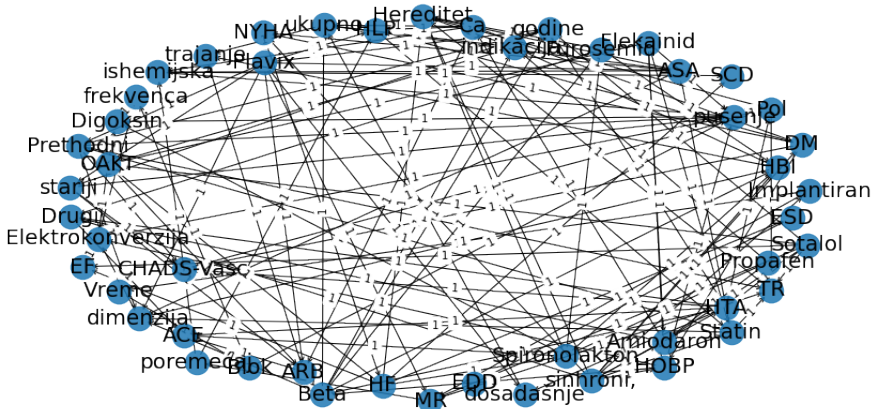

Test performance

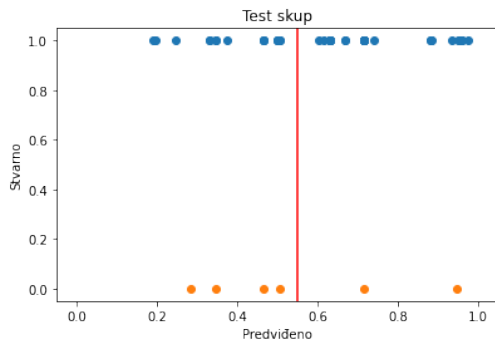


Other models


- Bayesian networks turned out pretty bad.
- Luckily, other models saved the day.
- Follows: decision trees, support vector machine...

Decision tree


Matrica konfuzije




ROC kriva






Odnos preciznosti i odziva






Tree pruning

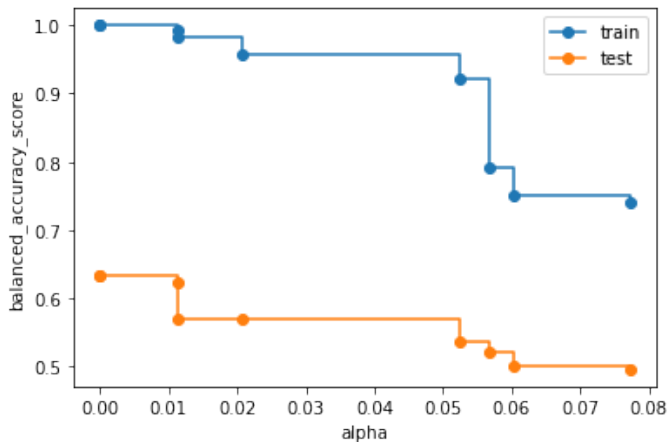




Complement naïve Bayes



Multilayer perceptron






Support vector machine






Ensembles

- Finally, it is possible to combine several models into one.
- One way to do so is using simple voting ensembles.
- It is best to favorize important unsuccessful procedures.
- Decision function – conjunction (product) of all input estimators:
 - of course, $\text{False} \wedge \text{False} = \text{False}$,
 - of course, $\text{True} \wedge \text{True} = \text{True}$,
 - also, $\text{False} \wedge \text{True} = \text{False}$,
 - also, $\text{True} \wedge \text{False} = \text{False}$.




MLP-SVC ensemble



RFC-CNB ensemble



MLP-CNB ensemble




MLP-CNB clasification report

	precision	recall	f1-score	support
False	0.46	1.00	0.63	6
True	1.00	0.85	0.92	46
accuracy			0.87	52
macro avg	0.73	0.92	0.77	52
weighted avg	0.94	0.87	0.88	52

MLP-CNB pipeline

- Train-test split with augmented train partition
 - RandomOverSampler (imblearn)
- EnsembleVoteClassifier (mlxtend)
 - MLPClassifier (sklearn)
 - StandardScaler (sklearn)
 - solver='sgd'
 - activation='tanh'
 - hidden_layer_sizes=(15, 10)
 - learning_rate='invscaling'
 - learning_rate_init=0.001
 - power_t=0.6
 - batch_size=5
 - max_iter=400
 - ComplementNB (sklearn)
 - MinMaxScaler (sklearn)
 - no special parameters

MLP-CNB flowchart

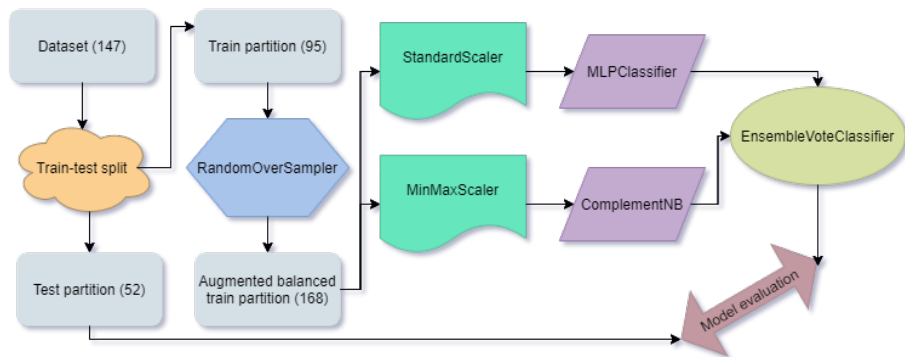

Conclusion

- All in all, predicting short-term success (immediate outcome) of electrical cardioversion isn't an easy task.
- Bayesian networks failed to detect innate dependencies.
- Other models were more efficient, with ensembles being the best.
- MLP-CNB ensemble managed to score full 100 % specificity.
- Still, precision on important class False is only 46 %.