



Ex.No.10 - AR using Feature Matching

Name : M MATHAN KUMAR

Roll No: 230701181

```
In [5]: import cv2
import numpy as np
from matplotlib import pyplot as plt
```

Display AR Pipeline Image

```
In [3]: # Path to the image
path = r"D:\VI\IP & CV\Lab Experiments\Inputs\AR Pipeline.jpeg"
img = cv2.imread(path)

print("Image loaded")
print("Image shape:", img.shape)






# Convert BGR to RGB
img_rgb = cv2.cvtColor(img, cv2.COLOR_BGR2RGB)

# Display image
plt.figure(figsize=(16, 10))
plt.imshow(img_rgb)
plt.title("AR Feature Matching Pipeline")
plt.axis("off")
plt.tight_layout()
plt.show()
```

Image loaded

Image shape: (720, 625, 3)

AR Feature Matching Pipeline

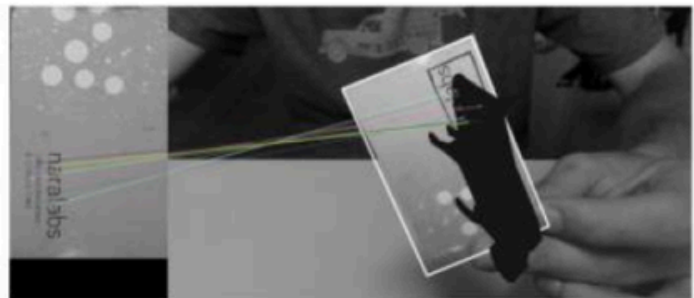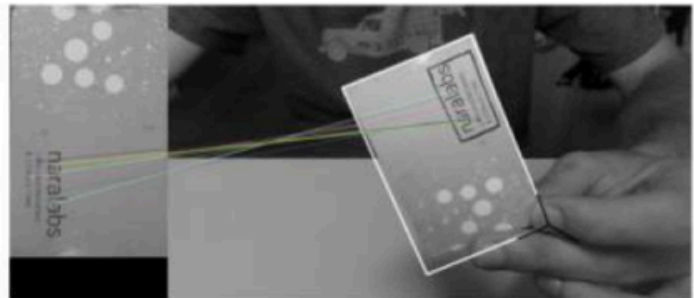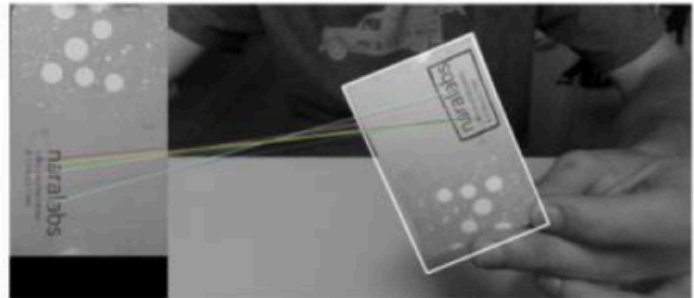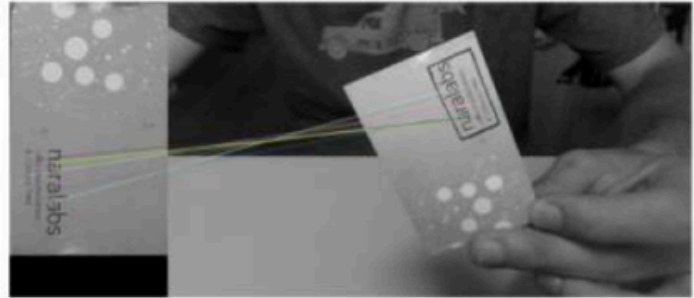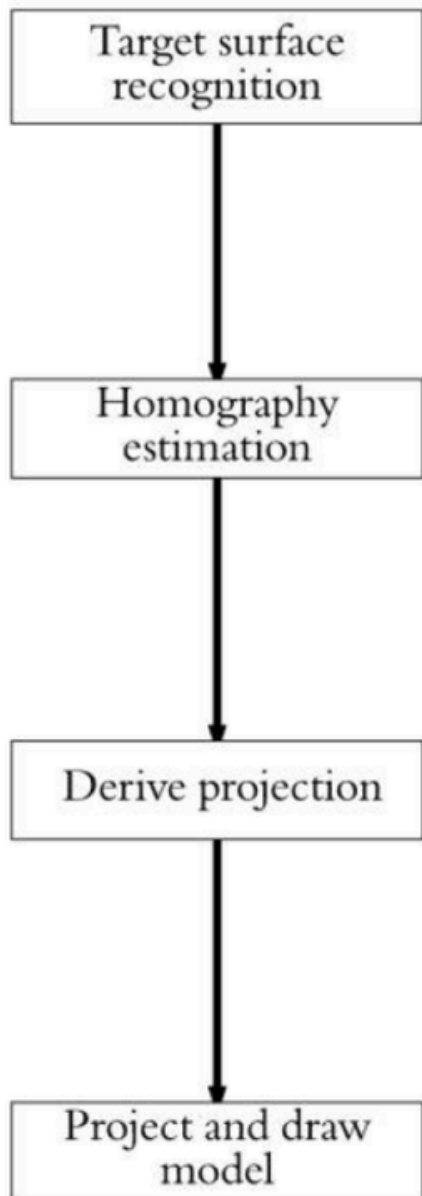

Perform AR Pipelining

```
In [14]: # Path
ref_path = r"D:\V\IP & CV\Lab Experiments\Inputs\left_view.png"
scene_path = r"D:\V\IP & CV\Lab Experiments\Inputs\right_view.png"

# Read images
reference_img = cv2.imread(ref_path)
```

```

scene_img = cv2.imread(scene_path)

if reference_img is None or scene_img is None:
    print("Error loading images")
    exit()

print("Reference:", reference_img.shape)
print("Scene:", scene_img.shape)

ref_h, ref_w = reference_img.shape[:2]

# Convert to grayscale
ref_gray = cv2.cvtColor(reference_img, cv2.COLOR_BGR2GRAY)
scene_gray = cv2.cvtColor(scene_img, cv2.COLOR_BGR2GRAY)

print("Images loaded")

```

Reference: (299, 398, 3)

Scene: (298, 397, 3)

Images loaded

```

In [15]: # Step 1: ORB feature detection
orb = cv2.ORB_create(nfeatures=1000)

ref_kp, ref_desc = orb.detectAndCompute(ref_gray, None)
scene_kp, scene_desc = orb.detectAndCompute(scene_gray, None)
print("Reference Keypoints:", len(ref_kp))
print("Scene Keypoints:", len(scene_kp))

ref_vis = cv2.drawKeypoints(reference_img, ref_kp, None, color=(0,255,0))
scene_vis = cv2.drawKeypoints(scene_img, scene_kp, None, color=(0,255,0))

plt.figure(figsize=(16,6))

plt.subplot(1,2,1)
plt.imshow(cv2.cvtColor(ref_vis, cv2.COLOR_BGR2RGB))
plt.title("Reference Features")
plt.axis("off")



plt.subplot(1,2,2)
plt.imshow(cv2.cvtColor(scene_vis, cv2.COLOR_BGR2RGB))
plt.title("Scene Features")
plt.axis("off")

plt.show()

```

Reference Keypoints: 990

Scene Keypoints: 976

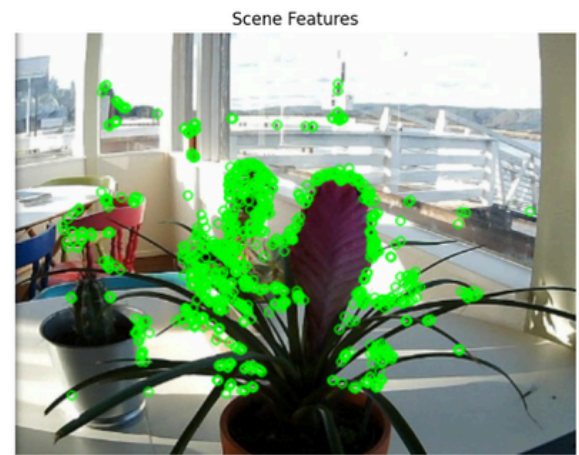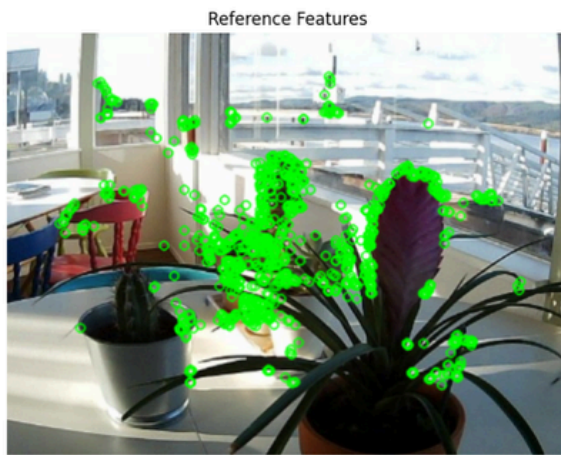

```
In [19]: # Step 2: Feature Matching

# Match descriptors
bf = cv2.BFMatcher(cv2.NORM_HAMMING, crossCheck=False)
matches = bf.knnMatch(ref_desc, scene_desc, k=2)

# Lowe's ratio test
good_matches = []
for pair in matches:
    if len(pair) == 2:
        m, n = pair
        if m.distance < 0.75 * n.distance:
            good_matches.append(m)

print("Total raw matches:", len(matches))
print("Good matches:", len(good_matches))

if len(matches) > 0:
    print("Match quality:", round(len(good_matches)/len(matches)*100, 2), "%")


match_img = cv2.drawMatches(reference_img, ref_kp,
                             scene_img, scene_kp,
                             good_matches[:100], None, flags=2)

plt.figure(figsize=(18,6))
plt.imshow(cv2.cvtColor(match_img, cv2.COLOR_BGR2RGB))
plt.title("Feature Matches")
plt.axis("off")
plt.show()
```

Total raw matches: 990

Good matches: 70

Match quality: 7.07 %

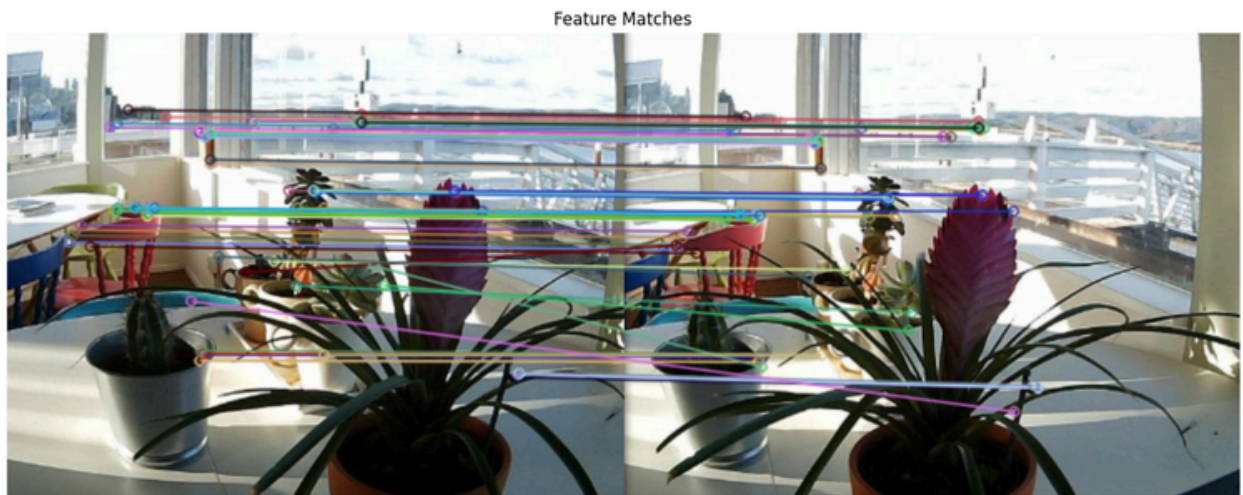

```
In [25]: # Step 3: Compute homography
src_pts = np.float32([ref_kp[m.queryIdx].pt for m in good_matches])
dst_pts = np.float32([scene_kp[m.trainIdx].pt for m in good_matches])

print("Reference points:", src_pts.shape)
print("Scene points:", dst_pts.shape)

H, mask = cv2.findHomography(src_pts, dst_pts, cv2.RANSAC, 5.0)

if H is None:
    print("Homography failed")
    exit()

print("\nHomography matrix:\n", H)

inliers = np.sum(mask)
print("\nInliers:", inliers)
print("Outliers:", len(good_matches) - inliers)

# Draw detected region
corners = np.float32([[0,0],[ref_w,0],[ref_w,ref_h],[0,ref_h]])
transformed = cv2.perspectiveTransform(corners.reshape(-1,1,2), H)

scene_marked = scene_img.copy()
cv2.polylines(scene_marked, [np.int32(transformed)], True, (0,255,0), 3)
cv2.putText(scene_marked, "Detected Marker Region",
            (20, 40),
            cv2.FONT_HERSHEY_SIMPLEX,
            1,
            (0, 255, 0),
            2)

plt.imshow(cv2.cvtColor(scene_marked, cv2.COLOR_BGR2RGB))
plt.title("Detected Marker")
plt.axis("off")
plt.show()
```

Reference points: (70, 2)

Scene points: (70, 2)

Homography matrix:

```
[[ 7.85982943e-01 -1.51376403e-01  1.67242874e+01]
 [-3.56733023e-02  7.88501303e-01  1.37788242e+01]
 [-5.35327592e-04 -9.30762278e-04  1.00000000e+00]]
```

Inliers: 44

Outliers: 26



```
In [11]: # Step 4: Project and Draw 3D models

# Project cube
def project_cube(H, sx, sy, sz):
    pts = np.float32([
        [0,0,0],[sx,0,0],[0,sy,0],[sx,sy,0],
        [0,0,-sz],[sx,0,-sz],[0,sy,-sz],[sx,sy,-sz]
    ])
    out = []
    for p in pts:
        p_h = np.array([p[0], p[1], 1])
        proj = H @ p_h
        out.append(proj[:2]/proj[2])
    return np.array(out)

# Draw cube
def draw_cube(img, pts):
    edges = [(0,1),(1,5),(5,4),(4,0),(2,3),(3,7),(7,6),(6,2),
```



```

        (0,2),(1,3),(5,7),(4,6)]
    for s,e in edges:
        cv2.line(img, tuple(map(int, pts[s])), tuple(map(int, pts[e])), (255,0

# Project axes
def project_axes(H, size):
    pts = np.float32([[0,0,0],[size,0,0],[0,size,0],[0,0,-size]])
    out = []
    for p in pts:
        p_h = np.array([p[0], p[1], 1])
        proj = H @ p_h
        out.append(proj[:2]/proj[2])
    return np.array(out)

# Draw axes
def draw_axes(img, pts):
    o = tuple(map(int, pts[0]))
    cv2.line(img, o, tuple(map(int, pts[1])), (0,0,255), 3) cv2.line(img,
    o, tuple(map(int, pts[2])), (0,255,0), 3) cv2.line(img, o,
    tuple(map(int, pts[3])), (255,0,0), 3)

```

In [30]:

```

# Step 5: AR Rendering

# Define sizes
sx = int(ref_w * 0.7) *
sy = int(ref_h * 0.7) *
sz = int(ref_h * 0.6)

# Cube
img_cube = scene_img.copy()
cube_pts = project_cube(H, sx, sy, sz)
draw_cube(img_cube, cube_pts)

cv2.putText(img_cube, "3D Cube Overlay",
(20, 40),
cv2.FONT_HERSHEY_SIMPLEX,
1,
(255, 0, 255),
2)

# Axes
img_axes = scene_img.copy()
axes_pts = project_axes(H, max(sx, sy))
draw_axes(img_axes, axes_pts)

cv2.putText(img_axes, "3D Axes",
(20, 40), cv2.FONT_HERSHEY_SIMPLEX, 1,
(0, 0, 255),
2)


plt.figure(figsize=(16,6))

```

```
plt.subplot(1,2,1)
plt.imshow(cv2.cvtColor(img_cube, cv2.COLOR_BGR2RGB))
plt.title("3D Cube")
plt.axis("off")

plt.subplot(1,2,2)
plt.imshow(cv2.cvtColor(img_axes, cv2.COLOR_BGR2RGB))
plt.title("3D Axes")
plt.axis("off")

plt.show()
```

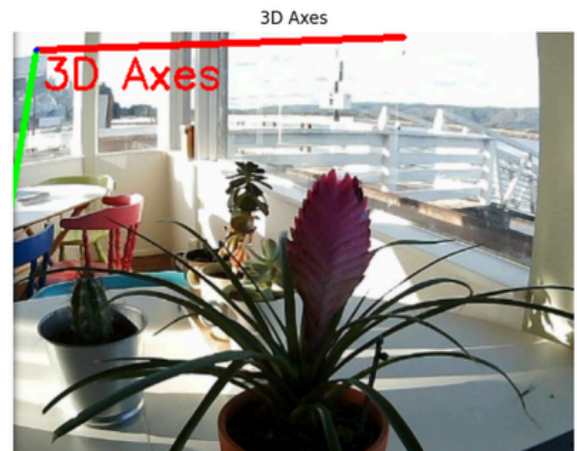

```
In [31]: # Summary

print("Features (ref, scene):", len(ref_kp), len(scene_kp))
print("Good matches:", len(good_matches))
print("Inliers:", inliers)

print("AR pipeline complete")
```

```
Features (ref, scene): 990 976
Good matches: 70
Inliers: 44
AR pipeline complete
```

In []: