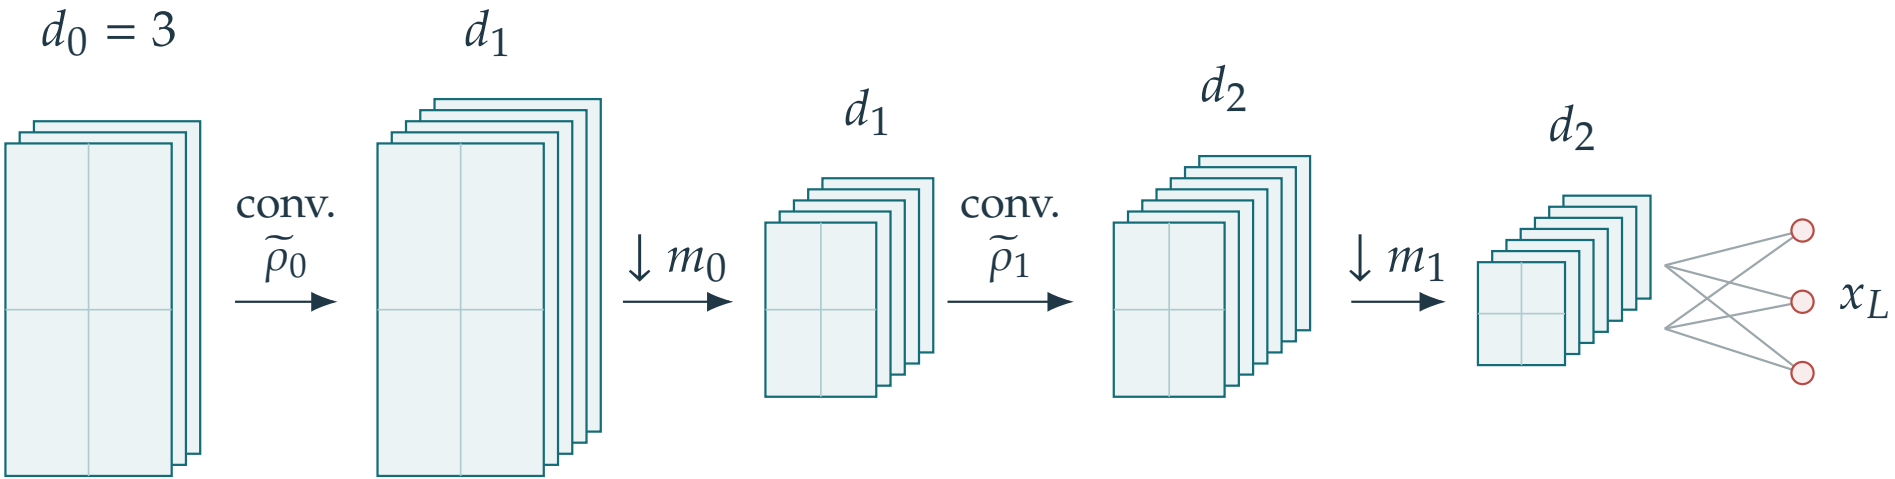


RGB input
$\bar{n}_0$ pixels

Shared filters; channel mixing; spatial downsampling

$$x_\ell \in \mathbb{R}^{\bar{n}_\ell \times d_\ell}, \qquad n_\ell = \bar{n}_\ell d_\ell$$