BTS SIO2

Groupe : Mohamed, Nathan, Célestin et Mathéo

# Procédure Technique GLPI



## Projet M2L

2026-2027

# Sommaire


Présentation . . . . . 3

Installation de GLPI . . . . . 4

Etape 1 : Apache . . . . . 4

Etape 2 : Démarrage d'Apache . . . . . 4

Etape 3 : PHP . . . . . 4

Etape 4 : Sécurisation . . . . . 4

Etape 5 : Base de données . . . . . 5

Etape 6 : Récupération de GLPI . . . . . 5

Etape 7 : Droits . . . . . 6

Etape 8 : Interface web . . . . . 6

Liaison avec l'Active Directory . . . . . 7

Etape 1 : Annuaire LDAP . . . . . 7

Etape 2 : Paramètres . . . . . 7

Etape 3 : Test . . . . . 8

Migration de la base vers M2L-SGBD . . . . . 9

Etape 1 : Export . . . . . 9

Etape 2 : Envoi . . . . . 9

Etape 3 : Import . . . . . 9

Etape 4 : Utilisateur . . . . . 9

Etape 5 : Config GLPI . . . . . 9

Etape 6 : Tests . . . . . 9

Etape 7 : Arrêt de la base locale . . . . . 9

# Présentation

GLPI sert à gérer le parc et les tickets. On l'installe sur M2L-GLPI, on le relie à l'AD, puis on déplace sa base sur M2L-SGBD.

| | |
|---|---|
| **Serveur** | M2L-GLPI (CT 400) - 172.16.2.247 |
| **Accès web** | http://172.16.2.247/glpi |
| **Annuaire LDAP** | M2L-AD1 - 172.16.2.242 |
| **Base de données** | M2L-SGBD - 192.168.1.4 |

# Installation de GLPI

**Etape 1 : On installe Apache avec apt install apache2 -y :**

```
root@M2L-GLPI:~# sudo apt install apache2 -y
Installing:
  apache2

Installing dependencies:
  apache2-bin    libapr1t64              libaprutil1t64  libgdbm-compat4t64  liblua5.4-0  libssh2-1t64       ssl-cert
  apache2-data   libaprutil1-dbd-sqlite3 libbrotli1      libldap-common      libperl5.40  perl
  apache2-utils  libaprutil1-ldap        libcurl4t64     libldap2            librtmp1     perl-modules-5.40
```

**Etape 2 : On l'active au démarrage avec systemctl enable --now apache2 :**

```
root@M2L-GLPI:~# sudo systemctl enable --now apache2
Synchronizing state of apache2.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable apache2
```

**Etape 3 : On installe mariadb-server puis PHP et ses extensions :**

```
root@M2L-GLPI:~# sudo apt install php php-cli php-common php-curl php-gd php-intl \
xml p> php-mbstring php-mysql php-xml php-zip php-bz2 php-bcmath \
> libapache2-mod-php -y
Installing:
  libapache2-mod-php  php  php-bcmath  php-bz2  php-cli  php-common  php-curl  php-gd  php-intl  php-mbstring  php-mysql  php-xml  php-zip

Installing dependencies:
  fontconfig-config      libargon2-1     libheif-plugin-aomdec  libjpeg-turbo8  libsodium23  libzip5        php8.5-common    php8.5-mysql
  fonts-dejavu-core      libdeflate0     libheif-plugin-aomenc  libjpeg8        libtiff6     php8.5         php8.5-curl      php8.5-readline
  fonts-dejavu-mono      libfontconfig1  libheif1               liblerc4        libwebp7     php8.5-bcmath  php8.5-gd        php8.5-xml
  libaom3                libfreetype6    libimagequant0         libonig5        libxpm4      php8.5-bz2     php8.5-intl      php8.5-zip
  libapache2-mod-php8.5  libgd3          libjbig0               libsharpyuv0    libxslt1.1   php8.5-cli     php8.5-mbstring
```

**Etape 4 : On lance mysql_secure_installation et on répond y partout :**

```
Disallow root login remotely? (Press y|Y for Yes, any other key for No) : y
Success.

By default, MySQL comes with a database named 'test' that
anyone can access. This is also intended only for testing,
and should be removed before moving into a production
environment.


Remove test database and access to it? (Press y|Y for Yes, any other key for No) : y
 - Dropping test database...
Success.

 - Removing privileges on test database...
Success.

Reloading the privilege tables will ensure that all changes
made so far will take effect immediately.

Reload privilege tables now? (Press y|Y for Yes, any other key for No) : y
Success.

All done!
root@M2L-GLPI:~#
```

**Etape 5 : On crée la base db_glpi et l'utilisateur glpi :**

```
mysql> Create dababase db_glpi
    -> \c
mysql>
mysql> CREATE DATABASE db_glpi;
Query OK, 1 row affected (0.00 sec)

mysql> CREATE USER 'glpi'@'172.16.2.247' identified by 'glpi88';
ERROR 1819 (HY000): Your password does not satisfy the current policy requirements
mysql> CREATE USER 'glpi'@'172.16.2.247' identified by 'glpi88888@';
Query OK, 0 rows affected (0.01 sec)

mysql> GRANT ALL PRIVILEGES ON db_glpi.* TO 'glpi'@'localhost';
ERROR 1410 (42000): You are not allowed to create a user with GRANT
mysql> GRANT ALL PRIVILEGES ON db_glpi.* TO 'glpi'@'172.16.2.247';
Query OK, 0 rows affected (0.00 sec)
```

ERROR 1819 : mot de passe trop faible. ERROR 1410 : le GRANT doit viser un compte qui existe. GLPI et la base sont sur la même machine, donc on met localhost.

**Etape 6 : L'archive ne marchait pas, on installe git et on fait git clone depuis GitHub :**

```
Get:4 http://archive.ubuntu.com/ubuntu resolute/main amd64 git amd64 1:2.53.0-1ubuntu1 [4227 kB]
Get:5 http://archive.ubuntu.com/ubuntu resolute/main amd64 patch amd64 2.8-2build1 [95.7 kB]
Fetched 5968 kB in 1s (7498 kB/s)
Selecting previously unselected package libcurl3t64-gnutls:amd64.
(Reading database ... 26344 files and directories currently installed.)
Preparing to unpack .../libcurl3t64-gnutls_8.18.0-1ubuntu2.7_amd64.deb ...
Unpacking libcurl3t64-gnutls:amd64 (8.18.0-1ubuntu2.7) ...
Selecting previously unselected package liberror-perl.
Preparing to unpack .../liberror-perl_0.17030-1_all.deb ...
Unpacking liberror-perl (0.17030-1) ...
Selecting previously unselected package git-man.
Preparing to unpack .../git-man_1%3a2.53.0-1ubuntu1_all.deb ...
Unpacking git-man (1:2.53.0-1ubuntu1) ...
Selecting previously unselected package git.
Preparing to unpack .../git_1%3a2.53.0-1ubuntu1_amd64.deb ...
Unpacking git (1:2.53.0-1ubuntu1) ...
Selecting previously unselected package patch.
Preparing to unpack .../patch_2.8-2build1_amd64.deb ...
Unpacking patch (2.8-2build1) ...
Setting up libcurl3t64-gnutls:amd64 (8.18.0-1ubuntu2.7) ...
Setting up liberror-perl (0.17030-1) ...
Setting up patch (2.8-2build1) ...
Setting up git-man (1:2.53.0-1ubuntu1) ...
Setting up git (1:2.53.0-1ubuntu1) ...
Processing triggers for man-db (2.13.1-1build1) ...
Processing triggers for libc-bin (2.43-2ubuntu2.4) ...
root@M2L-GLPI:/tmp# cd /tmp
git clone https://github.com/glpi-project/glpi.git
Cloning into 'glpi'...
remote: Enumerating objects: 452305, done.
remote: Counting objects: 100% (1995/1995), done.
remote: Compressing objects: 100% (1123/1123), done.
Receiving objects: 100% (452305/452305), 1.08 GiB | 11.25 MiB/s, done.
remote: Total 452305 (delta 1539), reused 872 (delta 872), pack-reused 450310 (from 3)
Resolving deltas:  84% (308757/367346)
```

**Etape 7 : On donne le dossier à Apache avec chown -R www-data:www-data /var/www/html/glpi :**


```
root@M2L-GLPI:/tmp# sudo chown -R www-data:www-data /var/www/html/glpi
root@M2L-GLPI:/tmp# sudo chmod -R 755 /var/www/html/glpi
root@M2L-GLPI:/tmp#
```

**Etape 8 : On va sur http://172.16.2.247/glpi, serveur SQL localhost, base db_glpi :**




# Liaison avec l'Active Directory


**Etape 1 : On va dans Configuration > Authentification > Annuaire LDAP puis Ajouter :**

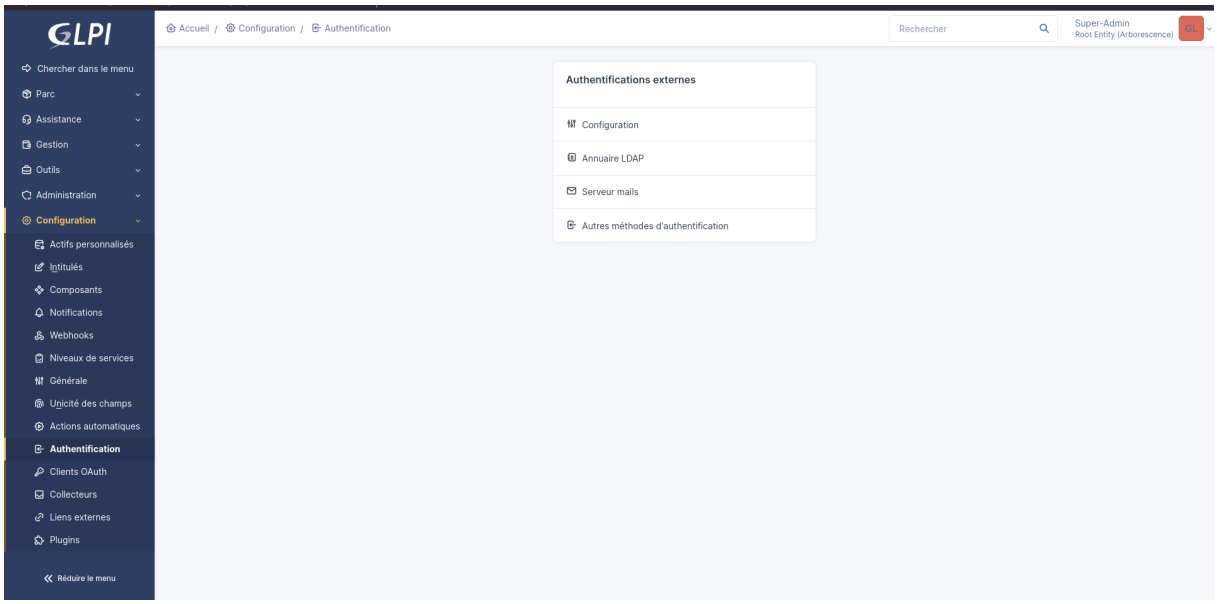


**Etape 2 : On clique sur Active Directory, serveur 172.16.2.242, BaseDN DC=M2L,DC=local, champ identifiant samaccountname et Activé sur Oui :**

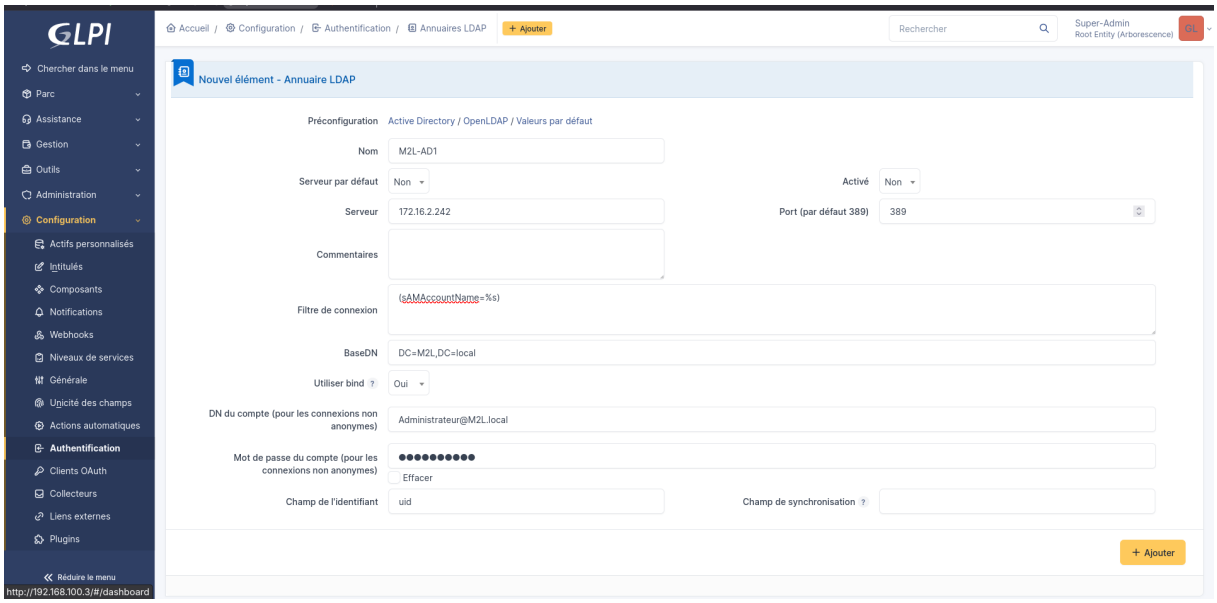

**Etape 3 : Dans l'onglet Tester, les 5 étapes sont vertes, GLPI voit les utilisateurs de l'AD :**

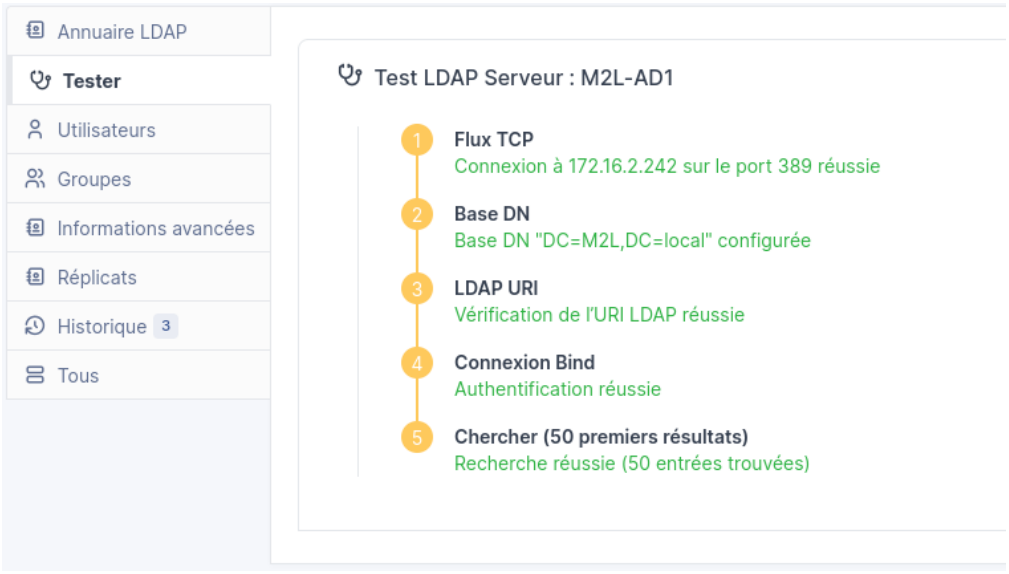

# Migration de la base vers M2L-SGBD

**Etape 1 : Sur M2L-GLPI, on exporte la base avec mysqldump :**

```
mkdir -p /root/export-bdd
mysqldump --single-transaction --routines --triggers db_glpi \
  > /root/export-bdd/glpi.sql
```

**Etape 2 : On envoie le fichier sur M2L-SGBD avec scp :**

```
scp /root/export-bdd/glpi.sql transfert@192.168.1.4:/home/transfert/
```

**Etape 3 : Sur M2L-SGBD, on crée la base et on importe :**

```
mariadb -e "CREATE DATABASE IF NOT EXISTS db_glpi
  CHARACTER SET utf8mb4 COLLATE utf8mb4_general_ci;"
mariadb db_glpi < /home/transfert/glpi.sql
```

**Etape 4 : On recrée l'utilisateur pour l'IP de GLPI :**

```
mariadb -e "CREATE USER IF NOT EXISTS 'glpi'@'172.16.2.247' IDENTIFIED BY 'glpi123';
mariadb -e "GRANT ALL PRIVILEGES ON db_glpi.* TO 'glpi'@'172.16.2.247';
  FLUSH PRIVILEGES;"
```

**Etape 5 : Sur M2L-GLPI, on modifie config/config_db.php :**

```
public $dbhost     = '192.168.1.4';
public $dbuser     = 'glpi';
public $dbpassword = 'glpi123';
public $dbdefault  = 'db_glpi';
```

**Etape 6 : On teste le port, la connexion et le site :**

```
nc -zv 192.168.1.4 3306
mariadb --protocol=tcp -h 192.168.1.4 -u glpi -p db_glpi
curl -sS -o /dev/null -w 'HTTP=%{http_code}\n' http://127.0.0.1/glpi/
```

**Etape 7 : Quand tout marche, on arrête le MariaDB local sans effacer les données :**

```
systemctl stop mariadb
systemctl disable mariadb
```