Trabalho Prático - Etapa 3 - Entrega Final


Matheus José da Costa 11711BCC008
Leonardo Ferreira Essia 11721BCC009

f)

i)


Adicionando uma categoria:

Hibernate: insert into category (name) values (?)

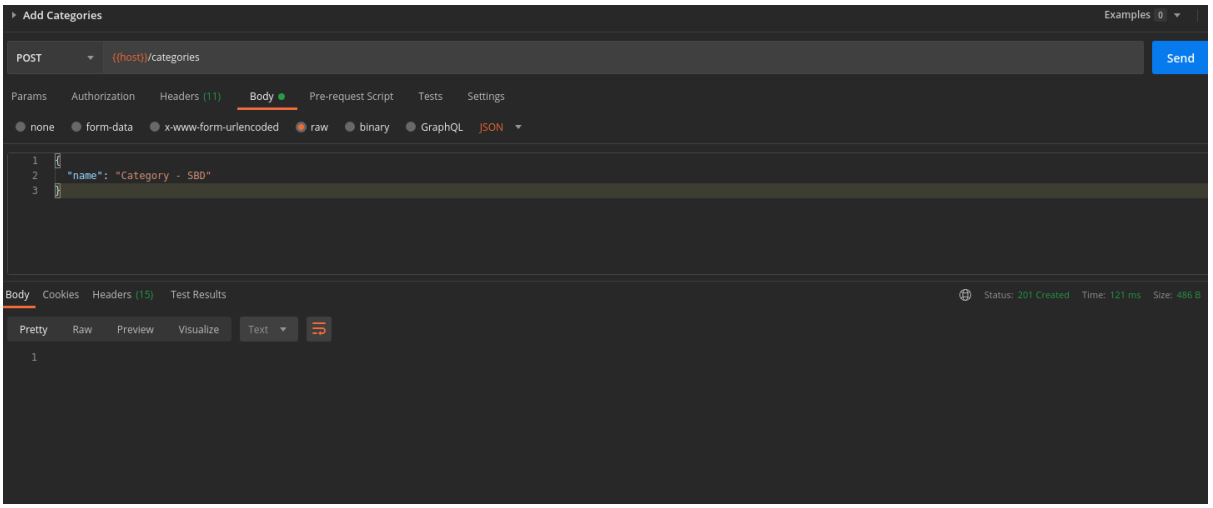


Atualizando uma categoria:

Hibernate: update category set name=? where id=?

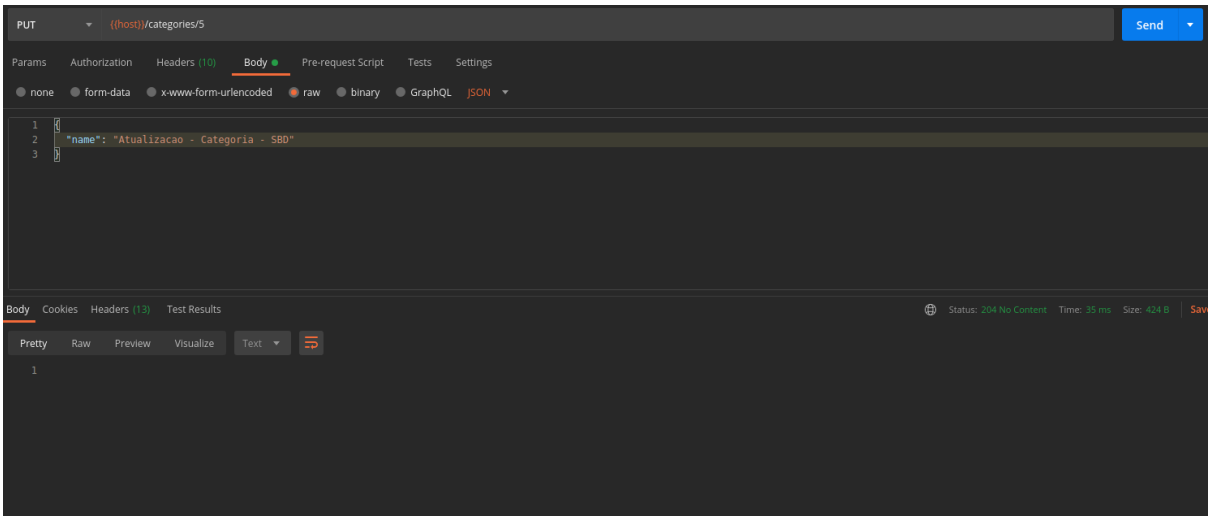


Buscando um categoria:


Hibernate: select category0_.id as id1_3_0_, category0_.name as name2_3_0_ from category category0_ where category0_.id=?

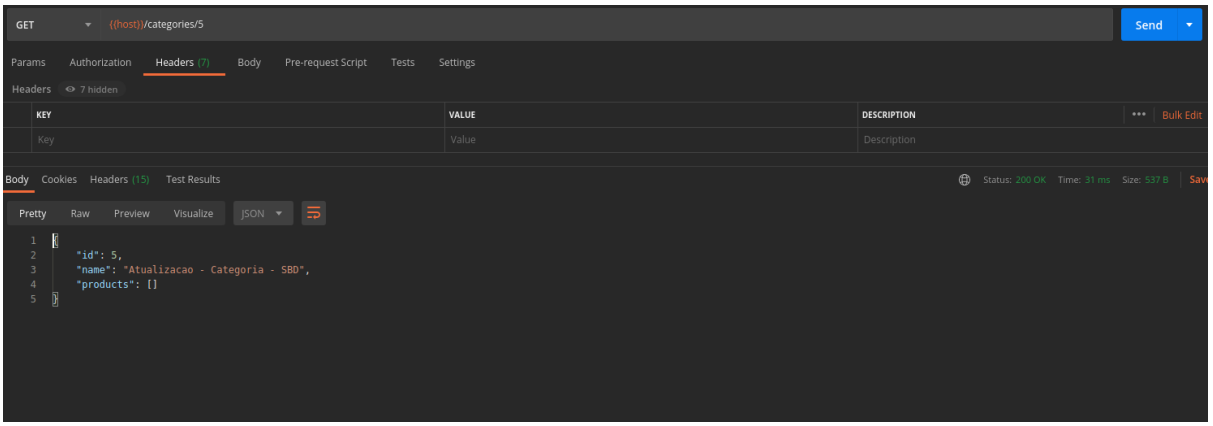

Deletando uma categoria:

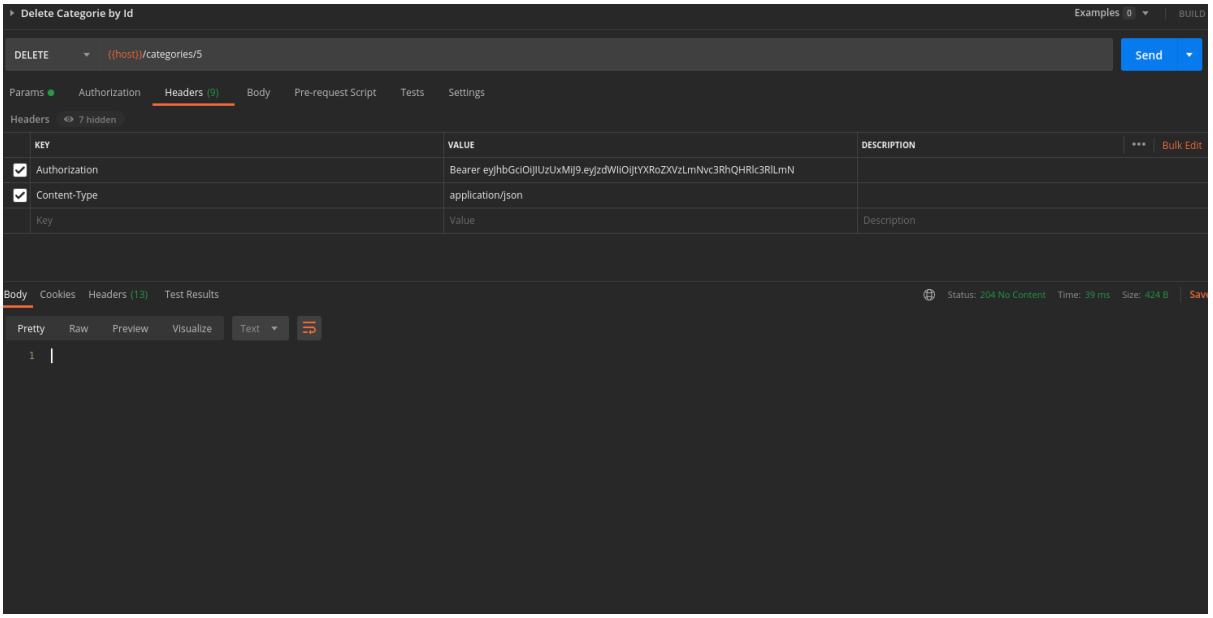


Depois de deletado, tentando buscar:

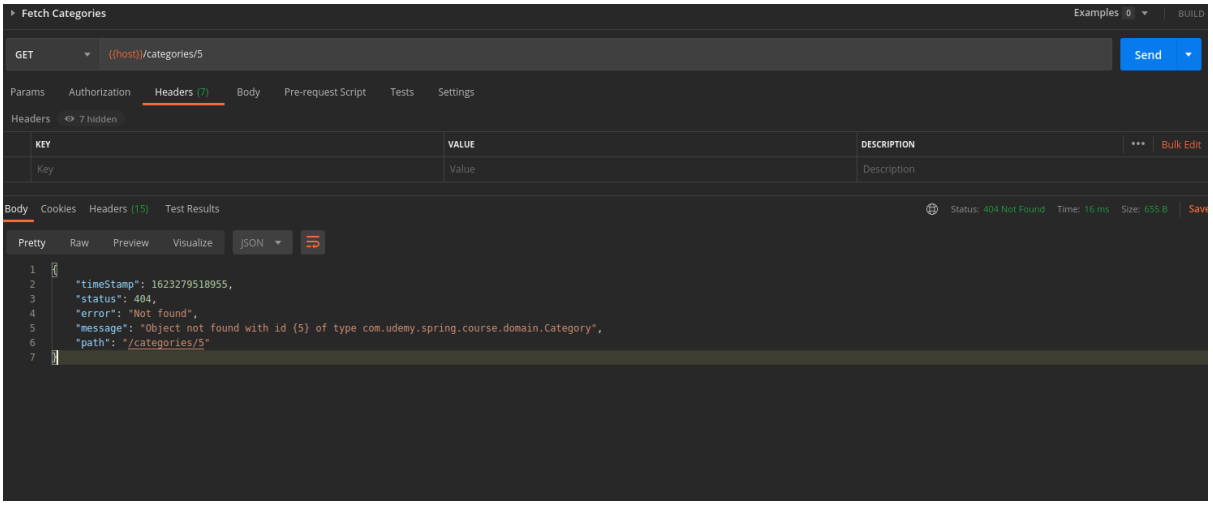

v)

Alterando mais de uma tabela do Banco de Dados (alterando os dados de um Cliente):

Hibernate: select customer0_.id as id1_6_, customer0_.email as email2_6_, customer0_.name as name3_6_, customer0_.password as password4_6_, customer0_.person_identity as person_i5_6_, customer0_.type as type6_6_ from customer customer0_ where customer0_.email=?
Hibernate: select profiles0_.customer_id as customer1_10_0_, profiles0_.profiles as profiles2_10_0_ from profile profiles0_ where profiles0_.customer_id=?
Hibernate: select customer0_.id as id1_6_, customer0_.email as email2_6_, customer0_.name as name3_6_, customer0_.password as password4_6_, customer0_.person_identity as person_i5_6_, customer0_.type as type6_6_ from customer customer0_ where customer0_.email=?
Hibernate: select customer0_.id as id1_6_0_, customer0_.email as email2_6_0_, customer0_.name as name3_6_0_, customer0_.password as password4_6_0_, customer0_.person_identity as person_i5_6_0_, customer0_.type as type6_6_0_, profiles1_.customer_id as customer1_10_1_, profiles1_.profiles as profiles2_10_1_ from customer customer0_ left outer join profile profiles1_ on customer0_.id=profiles1_.customer_id where customer0_.id=?
Hibernate: select city0_.id as id1_5_0_, city0_.name as name2_5_0_, city0_.state_id as state_id3_5_0_, state1_.id as id1_13_1_, state1_.name as name2_13_1_ from city city0_ left outer join state state1_ on city0_.state_id=state1_.id where city0_.id=?
Hibernate: insert into address (city_id, complement, customer_id, neighborhood, number, public_place, zip_code) values (?, ?, ?, ?, ?, ?, ?)
Hibernate: update customer set email=?, name=?, password=?, person_identity=?, type=? where id=?
Hibernate: delete from phone where customer_id=?
Hibernate: insert into phone (customer_id, phones) values (?, ?)
Hibernate: insert into phone (customer_id, phones) values (?, ?)
Hibernate: insert into phone (customer_id, phones) values (?, ?)

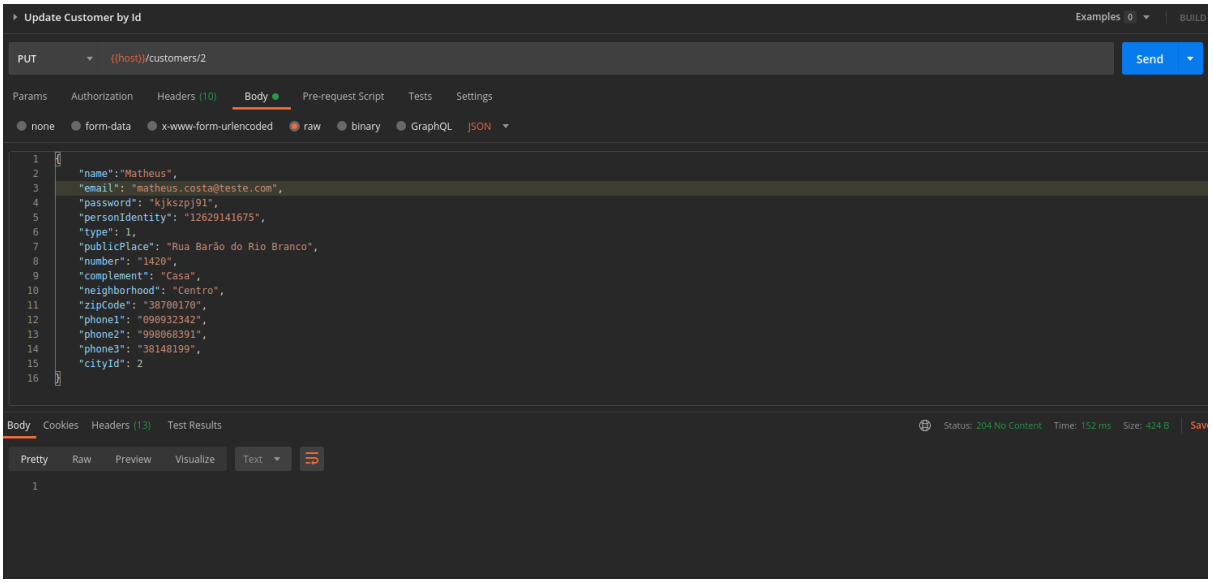

Customer atualizado (dá pra ver que ele tem mais um telefone):

