Trabalho Prático de SBD - Parte 2

Matheus José da Costa 11711BCC008
Leonardo Essia 11712BCC009

2)

e)

```
## Category
INSERT INTO trabalho_sbd.category (id, name) VALUES (1, 'Informática');
INSERT INTO trabalho_sbd.category (id, name) VALUES (2, 'Escritório');
INSERT INTO trabalho_sbd.category (id, name) VALUES (3, 'Mesa e
banho');
INSERT INTO trabalho_sbd.category (id, name) VALUES (4, 'Teste');

## Product
INSERT INTO trabalho_sbd.product (id, name, price) VALUES (1,
'Computador', 2000);
INSERT INTO trabalho_sbd.product (id, name, price) VALUES (2,
'Impressora', 800);
INSERT INTO trabalho_sbd.product (id, name, price) VALUES (3, 'Mouse',
80);
INSERT INTO trabalho_sbd.product (id, name, price) VALUES (4, 'Mesa de
escritório', 300);
INSERT INTO trabalho_sbd.product (id, name, price) VALUES (5, 'Toalha',
50);
INSERT INTO trabalho_sbd.product (id, name, price) VALUES (6, 'Colcha',
200);

## Product Category
INSERT INTO trabalho_sbd.category_product (product_id, category_id)
VALUES (1, 1);
INSERT INTO trabalho_sbd.category_product (product_id, category_id)
VALUES (2, 1);
INSERT INTO trabalho_sbd.category_product (product_id, category_id)
VALUES (2, 2);
INSERT INTO trabalho_sbd.category_product (product_id, category_id)
VALUES (3, 1);
INSERT INTO trabalho_sbd.category_product (product_id, category_id)
VALUES (4, 3);
INSERT INTO trabalho_sbd.category_product (product_id, category_id)
VALUES (5, 3);
```

```
INSERT INTO trabalho_sbd.category_product (product_id, category_id)
VALUES (6, 1);

## State
INSERT INTO trabalho_sbd.state (id, name) VALUES (1, 'Minas Gerais');
INSERT INTO trabalho_sbd.state (id, name) VALUES (2, 'São Paulo');

## City
INSERT INTO trabalho_sbd.city (id, name, state_id) VALUES (1,
'Uberlândia', 1);
INSERT INTO trabalho_sbd.city (id, name, state_id) VALUES (2, 'São
Paulo', 2);
INSERT INTO trabalho_sbd.city (id, name, state_id) VALUES (3,
'Campinas', 2);

## Customer
INSERT INTO trabalho_sbd.customer (id, email, name, person_identity,
type, password) VALUES (1, 'maria@gmail.com', 'Maria Silva',
'72113079003', 1,
'$2y$12$ojDDqa48iPiTnzyzaOiqDeDH08/NljrjsiRiODk0wUqZKZ84l8MgC');
INSERT INTO trabalho_sbd.customer (id, email, name, person_identity,
type, password) VALUES (2, 'matheus@tutanota.com', 'Matheus',
'61522253025', 1,
'$2y$12$cOKTjfwZe39JHGp3tlGYbeiiYB2GZOaNr9nDBDzw0Ku1Umdn.geeu');

## Phones
INSERT INTO trabalho_sbd.phone (customer_id, phones) VALUES (1,
'998068391');
INSERT INTO trabalho_sbd.phone (customer_id, phones) VALUES (1,
'38148199');

## Address
INSERT INTO trabalho_sbd.address (id, complement, neighborhood, number,
public_place, zip_code, city_id, customer_id) VALUES (1, 'Apto 303',
'Jardim', '300', 'Rua Flores', '38408136', 1, 1);
INSERT INTO trabalho_sbd.address (id, complement, neighborhood, number,
public_place, zip_code, city_id, customer_id) VALUES (2, 'Apto 500',
'Centro', '105', 'Avenida Matos', '38408135', 2, 1);

## Request
INSERT INTO trabalho_sbd.request (id, created_at, customer_id,
delivery_address_id) VALUES (1, '2017-09-30 13:32:00', 1, 1);
```

```
INSERT INTO trabalho_sbd.request (id, created_at, customer_id,
delivery_address_id) VALUES (2, '2019-10-30 14:27:00', 1, 2);
INSERT INTO trabalho_sbd.request (id, created_at, customer_id,
delivery_address_id) VALUES (3, '2020-06-08 04:41:48.897000000', 1, 1);

## Request Item
INSERT INTO trabalho_sbd.request_item (discount, price, quantity,
product_id, request_id) VALUES (0, 2000, 1, 1, 1);
INSERT INTO trabalho_sbd.request_item (discount, price, quantity,
product_id, request_id) VALUES (0, 2000, 1, 1, 3);
INSERT INTO trabalho_sbd.request_item (discount, price, quantity,
product_id, request_id) VALUES (100, 800, 1, 2, 2);
INSERT INTO trabalho_sbd.request_item (discount, price, quantity,
product_id, request_id) VALUES (0, 80, 2, 3, 1);
INSERT INTO trabalho_sbd.request_item (discount, price, quantity,
product_id, request_id) VALUES (0, 80, 2, 3, 3);

## Payment
INSERT INTO trabalho_sbd.payment (request_id, state) VALUES (1, 2);
INSERT INTO trabalho_sbd.payment (request_id, state) VALUES (2, 1);
INSERT INTO trabalho_sbd.payment (request_id, state) VALUES (3, 1);

## Billet Payment
INSERT INTO trabalho_sbd.billet_payment (due_date, payday, request_id)
VALUES ('2017-10-20 02:00:00', null, 2);

## Card Payment
INSERT INTO trabalho_sbd.card_payment (installments_number, request_id)
VALUES (6, 1);
INSERT INTO trabalho_sbd.card_payment (installments_number, request_id)
VALUES (10, 3);

## Profile
INSERT INTO trabalho_sbd.profile (customer_id, profiles) VALUES (1, 2);
INSERT INTO trabalho_sbd.profile (customer_id, profiles) VALUES (2, 1);
```

f)

ii)

select c.name, a.neighborhood, a.public_place, a.complement from trabalho_sbd.customer as c
inner join trabalho_sbd.address as a

on c.id = a.id

customer(+) ×

select c.name, a.neighborhood, a.public_place, a.complement from | Enter a SQL expressio

	name	neighborhood	public_place	complement
1	Maria Silva	Jardim	Rua Flores	Apto 303
2	Matheus José	Centro	Avenida Matos	Apto 500

select c.name, c.person_identity, r.id, r.created_at from trabalho_sbd.customer as c
inner join trabalho_sbd.request as r
on c.id = r.customer_id

```
5  select c.name, c.person_identity, r.id, r.created_at from trabalho_sbd.customer as c
6  inner join trabalho_sbd.request as r
7  on c.id = r.customer_id
8
9  select c.name, c.person_identity, p.phones from trabalho_sbd.customer as c
10 inner join trabalho_sbd.phone as p
11 on c.id = p.customer_id
12
```

customer(+) ×

select c.name, c.person_identity, r.id, r.created_at from trabalho_sb | Enter a SQL expression to filter results (use Ctrl+Spa

	name	person_identity	id	created_at
1	Maria Silva	72113079003	1	2017-09-30 13:32:00.0
2	Maria Silva	72113079003	2	2019-10-30 14:27:00.0
3	Maria Silva	72113079003	3	2020-06-08 04:41:49.0

select c.name, c.person_identity, p.phones from trabalho_sbd.customer as c
inner join trabalho_sbd.phone as p
on c.id = p.customer_id


customer(+) ×

select c.name, c.person_identity, p.phones from trabalho_sbd.custc |


	name	person_identity	phones
1	Maria Silva	72113079003	998068391
2	Maria Silva	72113079003	38148199

iii)


select max(p.price) as preco_maximo from category_product cp
inner join category c on c.id = cp.category_id
inner join product p on p.id = cp.product_id

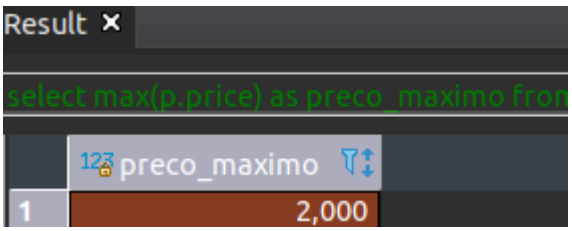


```
select avg(p.price) as preco_medio from category_product cp
inner join category c on c.id = cp.category_id
inner join product p on p.id = cp.product_id
```

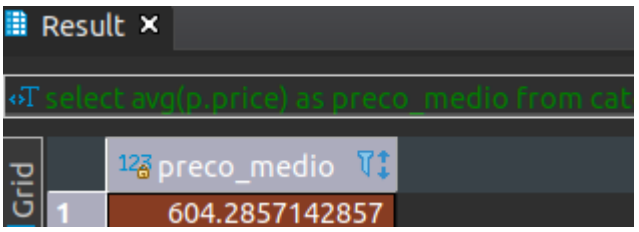


```
select c.name, c.person_identity, COUNT(p.phones) as quantidade_telefones from
trabalho_sbd.customer as c
natural join trabalho_sbd.phone p
group by c.name, c.person_identity
having count(p.phones) > 1;
```

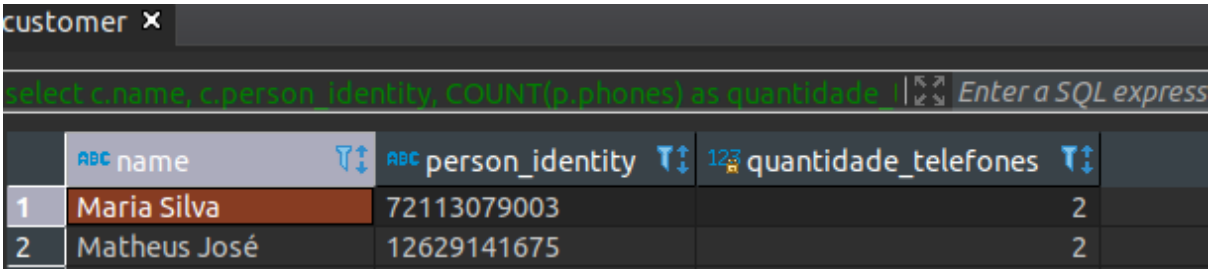

iv)

```
WITH RECURSIVE cte(nivel, idproduto) AS (
        SELECT 0, cp.product_id
        FROM trabalho_sbd.category_product cp
      UNION ALL
        SELECT ct.nivel + 1, p.id
        FROM trabalho_sbd.product p, cte ct
        WHERE p.id = ct.idproduto
)
SELECT distinct nivel, idproduto FROM cte order by 1, 2;
```

vii)

```
create view confidencialidade as
        select c.name, c.email
        from trabalho_sbd.customer c
        where c.name = 'Maria Silva'

select * from confidencialidade
```

