


# Ruby on Rails 5.x

*Do início ao fim!*

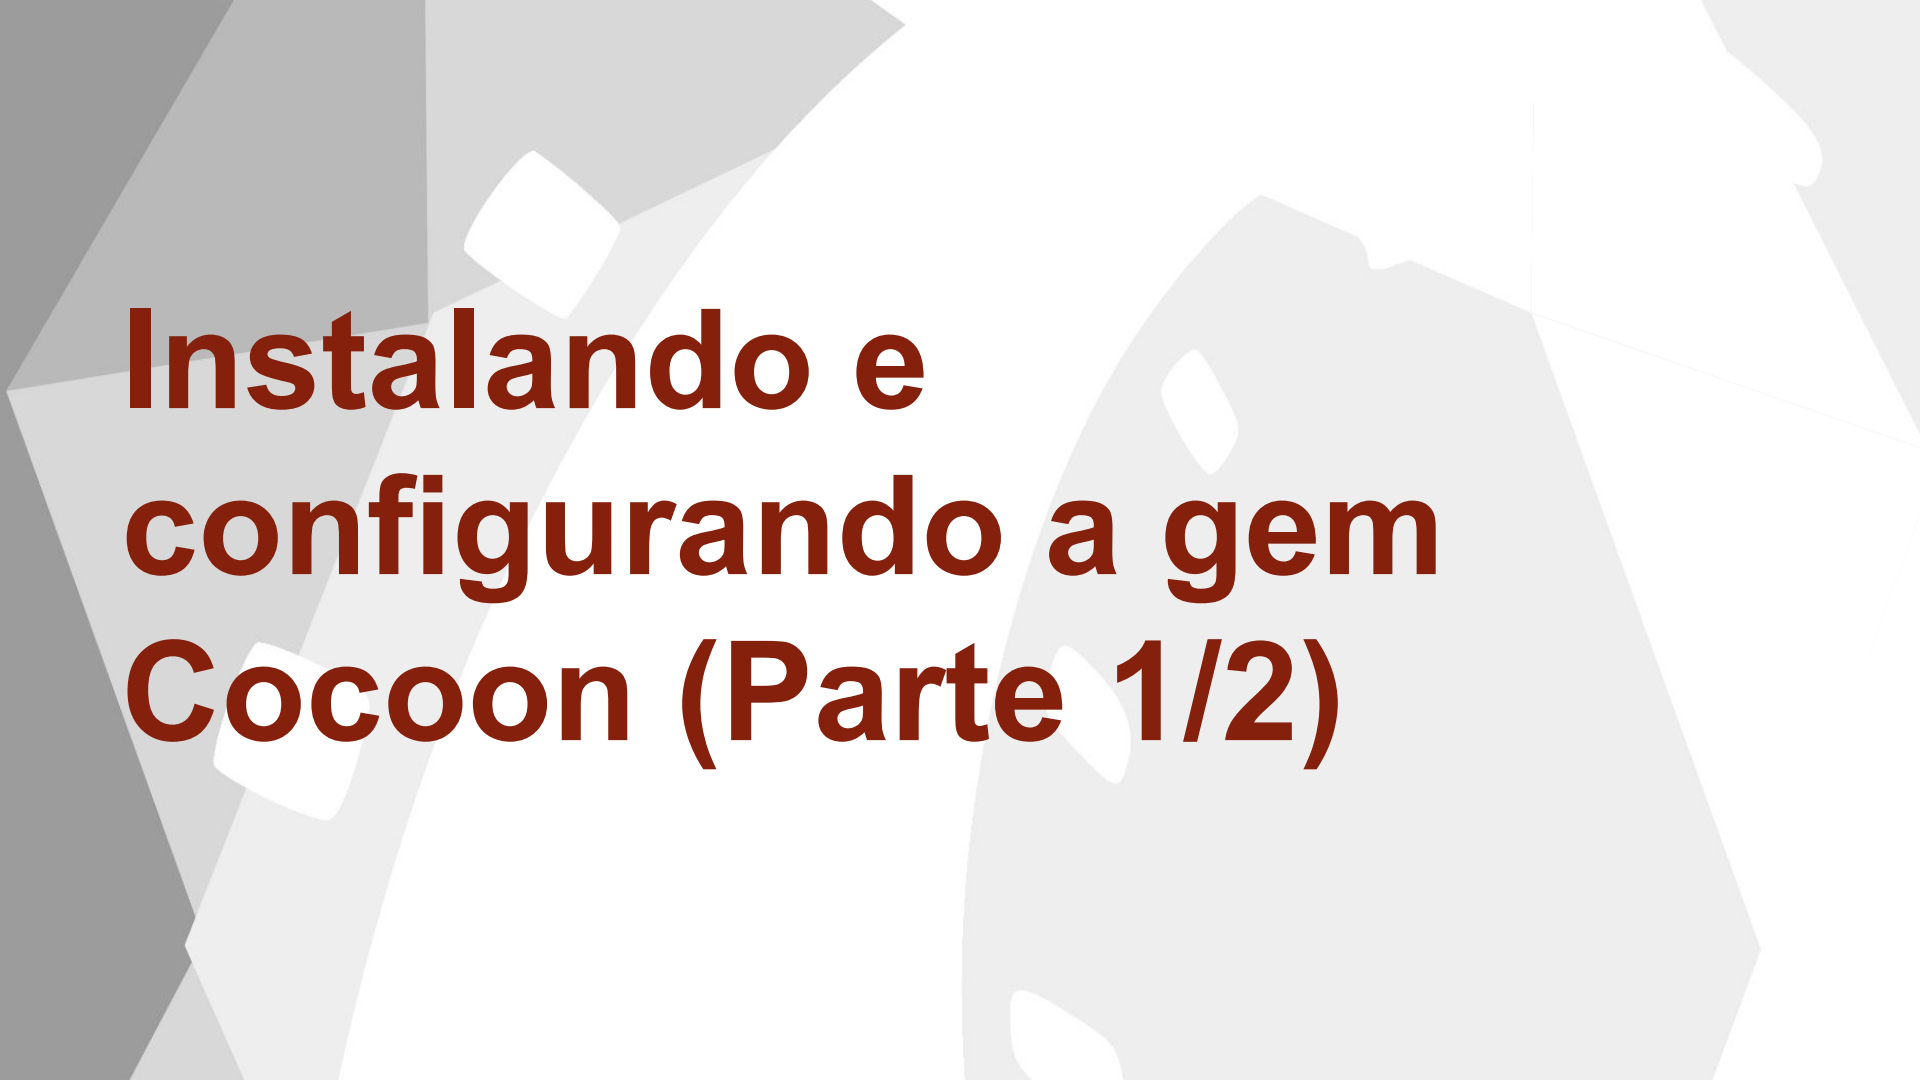

# **Instalando e configurando a gem Cocoon (Parte 1/2)**

# Instalando e configurando a gem Cocoon

Pergunta

Assunto

Adicionar Resposta

Salvar

# Instalando e configurando a gem Cocoon

Pergunta

Assunto

Adicionar Resposta

Salvar

# Instalando e configurando a gem Cocoon

Pergunta

Assunto

Adicionar Resposta



Descrição

☐ Correta?

Salvar

# Instalando e configurando a gem Cocoon

Pergunta

Assunto

 ▼

Adicionar Resposta

Descrição

☐ Correta?

Descrição

☒ Correta?

Descrição

☐ Correta?

Salvar

# Instalando e configurando a gem Cocoon

- Gem cocoon

`https://github.com/nathanvda/cocoon`

# Instalando e configurando a gem Cocoon

- Adicione no **Gemfile**

```
gem "cocoon"
```

- Rode o **bundle**



# Instalando e configurando a gem Cocoon

- Adicione no **app/assets/javascripts/admins\_backoffice.coffee**

```
//= require cocoon
```

# Instalando e configurando a gem Cocoon

- Altere o model **Question**

```
class Question < ApplicationRecord
  belongs_to :subject, inverse_of: :questions
  has_many :answers
  accepts_nested_attributes_for :answers, reject_if:
:all_blank, allow_destroy: true
end
```

# Instalando e configurando a gem Cocoon

- Libere os campos no **Strong Parameters** em `app/controllers/admins_backoffice/questions_controller.rb`

```
def params_question
  params.require(:question).permit(:description, :subject_id ,
    answers_attributes: [:id, :description, :correct, :_destroy])
end
```