


Setting Up SecureCRT

- I. If prompted with this window:




Choose **"Without a configuration passphrase"** and click [OK]


- II. Close the **"Quick Connect"** window

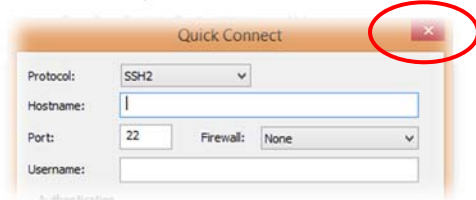

- III. Go to **Options > Global Options**

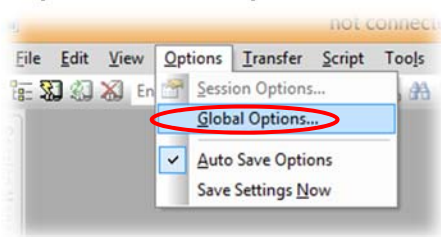


- IV. Under **General** → **Default Session** and click [Edit Default Settings...]

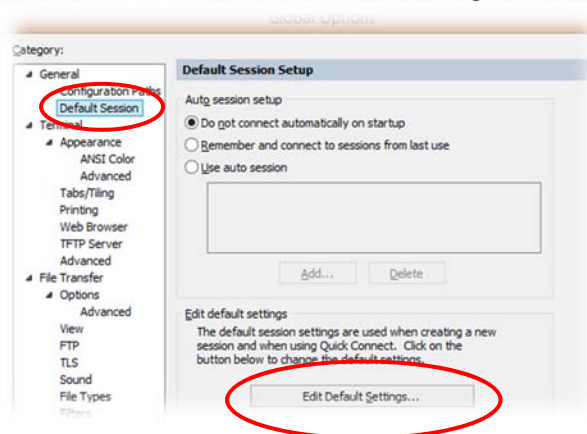


SSH Settings


- V. Under **Connection** → **SSH2** and enter your **Username**

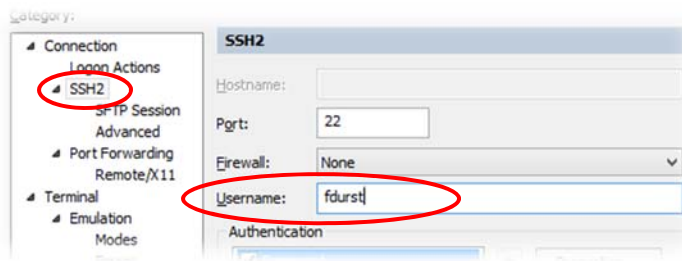


- VI. Click **“Keyboard Interactive”** and move it to the top with the **Up Arrow**

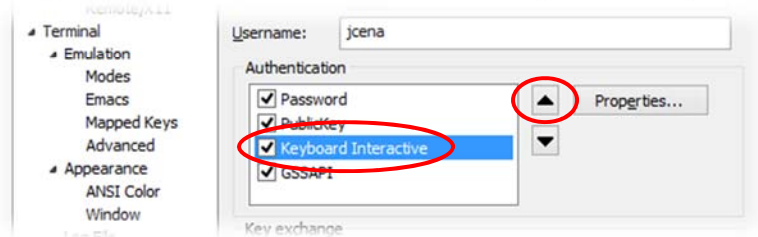

- VII. Check the **“Store password”** box, enter your **password** and click [OK]




- VIII. In the **Key exchange** box, Scroll all the way down, and check the **diffie-hellman** box

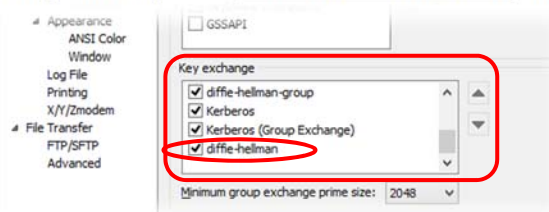


Terminal Settings


- IX. Under **Terminal** → **Emulation** and change **“Logical Columns”** to **90**

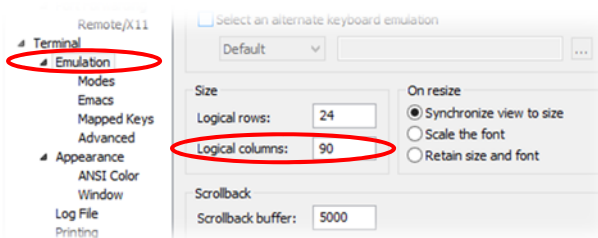

- X. Change **“Scrollback buffer”** to **128000** and click [OK]

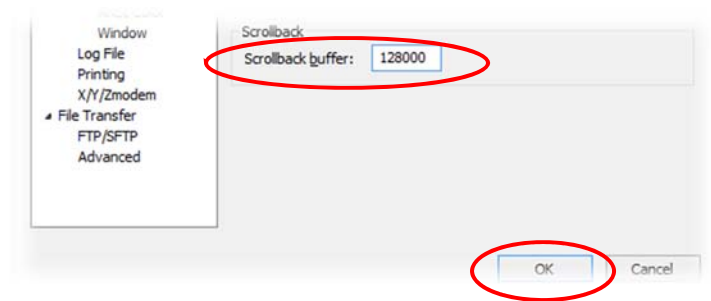


XI. Click **"Change ALL sessions (no undo)"**

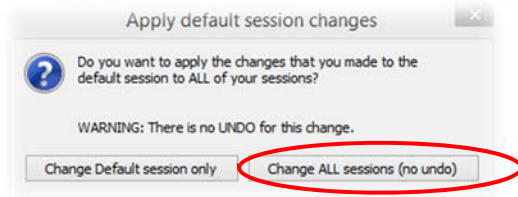

TFTP Settings

XII. Under **Terminal** → **TFTP Server** set the **Local Directories** to **C:\CyberTransport\TFTP** and click [OK]

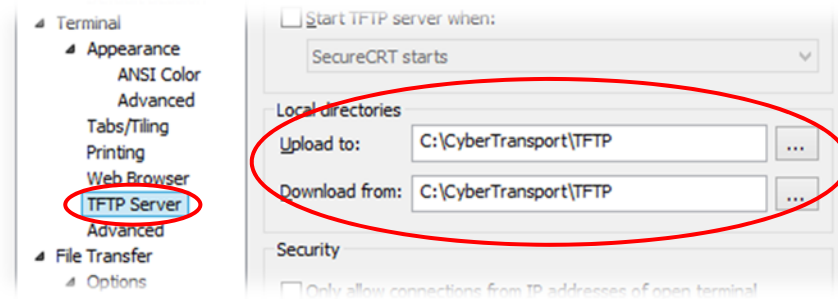

Donesies!