

Data Science Capstone Project

Mathew Romy

Github link:https://github.com/mathhewRomy/IBM_Data_Science

OUTLINE

- Executive Summary
- Introduction
- Methodology
- Results
- Conclusion
- Appendix

Executive Summary

- Collected data from SpaceX API and SpaceX Wikipedia page. Explored data using SQL, visualization, folium maps, and dashboards. Gathered relevant columns to be used as features. Changed all categorical variables to binary using encoding. Standardized data and used GridSearchCV to find best parameters for machine learning models. Visualize accuracy score of all models
- Machine learning models like Logistic Regression, Support Vector Machine, Decision Tree Classifier, and K Nearest Neighbors are used and an accuracy of 83.33%

Introduction

- SpaceX offers services with relatively lower costs.
- Due to the ability of SpaceX to recover part of the rocket.

Problem

- Space Y wants to train a machine learning model to predict successful Stage 1 recovery

Methodology

Data collection methodology:

- data from SpaceX public API and SpaceX Wikipedia page

Perform data wrangling

- Classifying true landings as successful and unsuccessful if false
- Perform exploratory data analysis (EDA) using visualization and SQL

Perform interactive visual analytics using Folium and Plotly Dash

Perform predictive analysis using classification models

- Tuned models using GridSearchCV

Data Collection - Using API

Steps

- Request data from SpaceX API (rocket launch data)
- Decode response using `.json()` and convert to a dataframe using `.json_normalize()`
- Request information about the launches from SpaceX API using custom functions
- Create dictionary from the data
- Create dataframe from the dictionary
- Filter dataframe to contain only Falcon 9 launches
- Replace missing values of Payload Mass with calculated `.mean()`
- Export data to csv file

Data Collection - Using WebScraping

Steps

- Request data (Falcon 9 launch data) from Wikipedia
- Create BeautifulSoup object from HTML response
- Extract column names from HTML table header
- Collect data from parsing HTML tables
- Create dictionary from the data
- Create dataframe from the dictionary
- Export data to csv file

Data Wrangling

- False Ocean: represented an unsuccessful landing to a specific region of ocean
- True RTLS: meant the mission had a successful landing on a ground pad
- False RTLS: represented an unsuccessful landing on a ground pad
- True ASDS: meant the mission outcome had a successful landing on a drone ship
- False ASDS: represented an unsuccessful landing on drone ship
- Outcomes converted into 1 for a successful landing and 0 for an unsuccessful landing

EDA with Visualization

Charts

- Flight Number vs. Payload
- Flight Number vs. Launch Site
- Payload Mass (kg) vs. Launch Site
- Payload Mass (kg) vs. Orbit type

EDA with SQL

- Loaded data set into IBM DB2 Database.
- Queried using SQL Python integration.
- Queries were made to get a better understanding of the dataset.
- Queried information about launch site names, mission outcomes, various payload sizes of customers and booster versions, and landing outcomes

Data Visualizations

Map with Folium

Markers Indicating Launch Sites

- Added blue circle at NASA Johnson Space Center's coordinate with a popup label showing its name using its latitude and longitude coordinates
- Added red circles at all launch sites coordinates with a popup label showing its name using its name using its latitude and longitude coordinates

Colored Markers of Launch Outcomes

- Added colored markers of successful (green) and unsuccessful (red) launches at each launch site to show which launch sites have high success rates

Distances Between a Launch Site to Proximities

- Added colored lines to show distance between launch site CCAFS SLC40 and its proximity to the nearest coastline, railway, highway, and city

Data Visualizations

Dashboard with Plotly Dash

Dropdown List with Launch Sites

- Allow user to select all launch sites or a certain launch site

Pie Chart Showing Successful Launches

- Allow user to see successful and unsuccessful launches as a percent of the total

Slider of Payload Mass Range

- Allow user to select payload mass range

Scatter Chart Showing Payload Mass vs. Success Rate by Booster Version

- Allow user to see the correlation between Payload and Launch Success


Predictive Analysis

Charts


- Create NumPy array from the Class column
- Standardize the data with StandardScaler. Fit and transform the data.
- Split the data using train_test_split
- Create a GridSearchCV object with cv=10 for parameter optimization
- Apply GridSearchCV on different algorithms: logistic regression (LogisticRegression()), support vector machine (SVC()), decision tree (DecisionTreeClassifier()), K-Nearest Neighbor (KNeighborsClassifier())
- Calculate accuracy on the test data using .score() for all models
- Assess the confusion matrix for all models
- Identify the best model using Jaccard_Score, F1_Score and Accuracy

EDA with Visualization


Flight Number vs. Launch Site

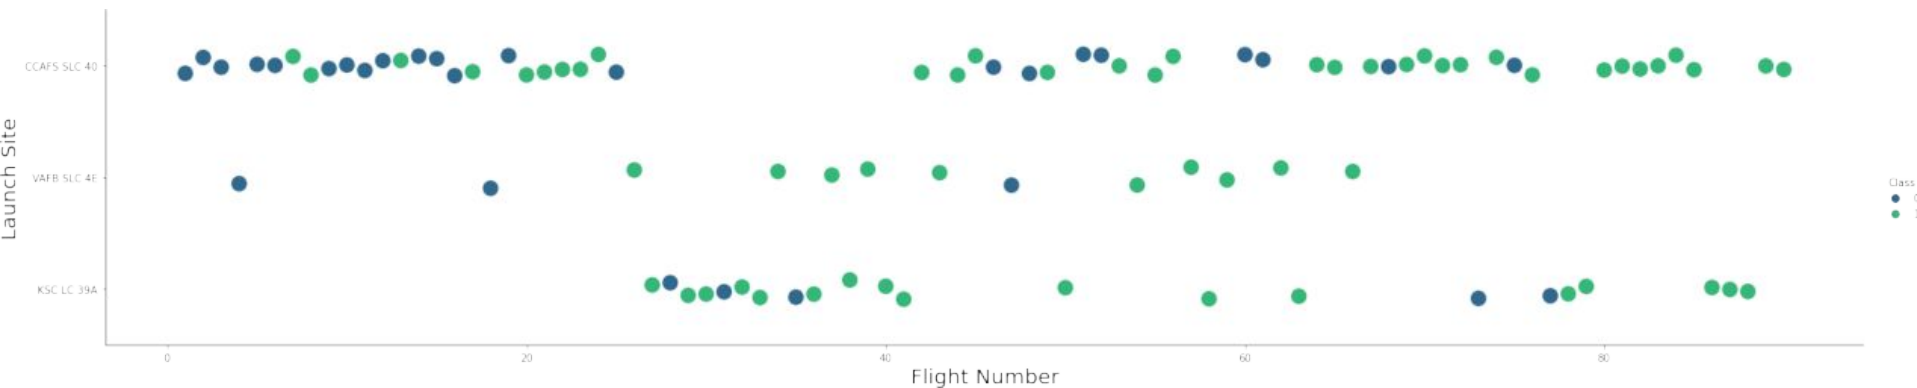


Payload vs. Launch Site

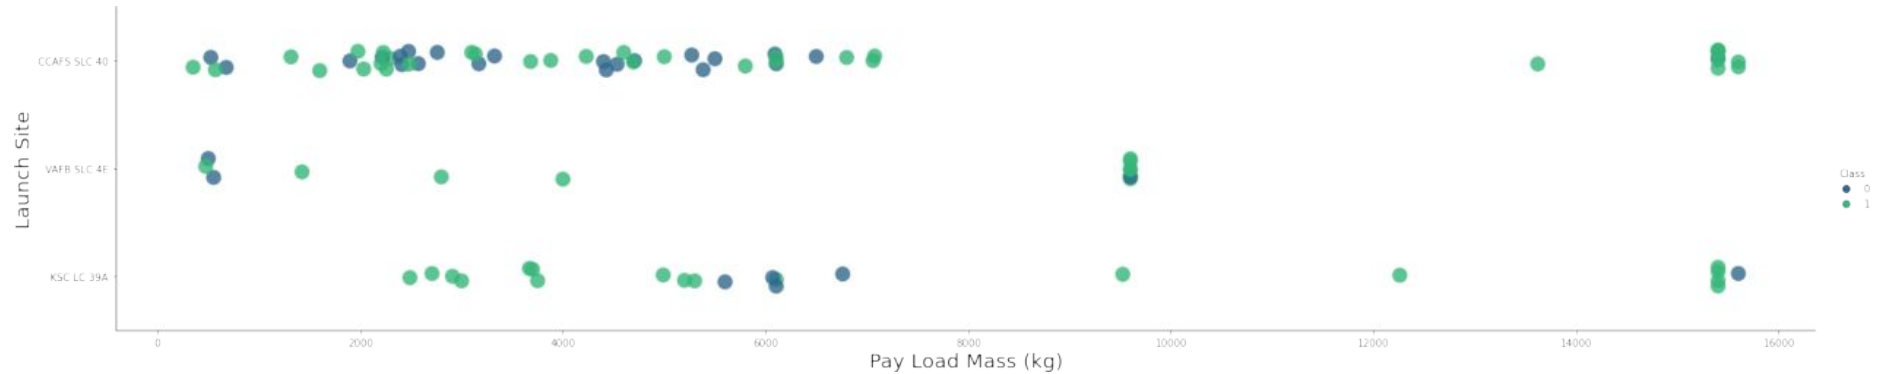


Success rate vs. Orbit type

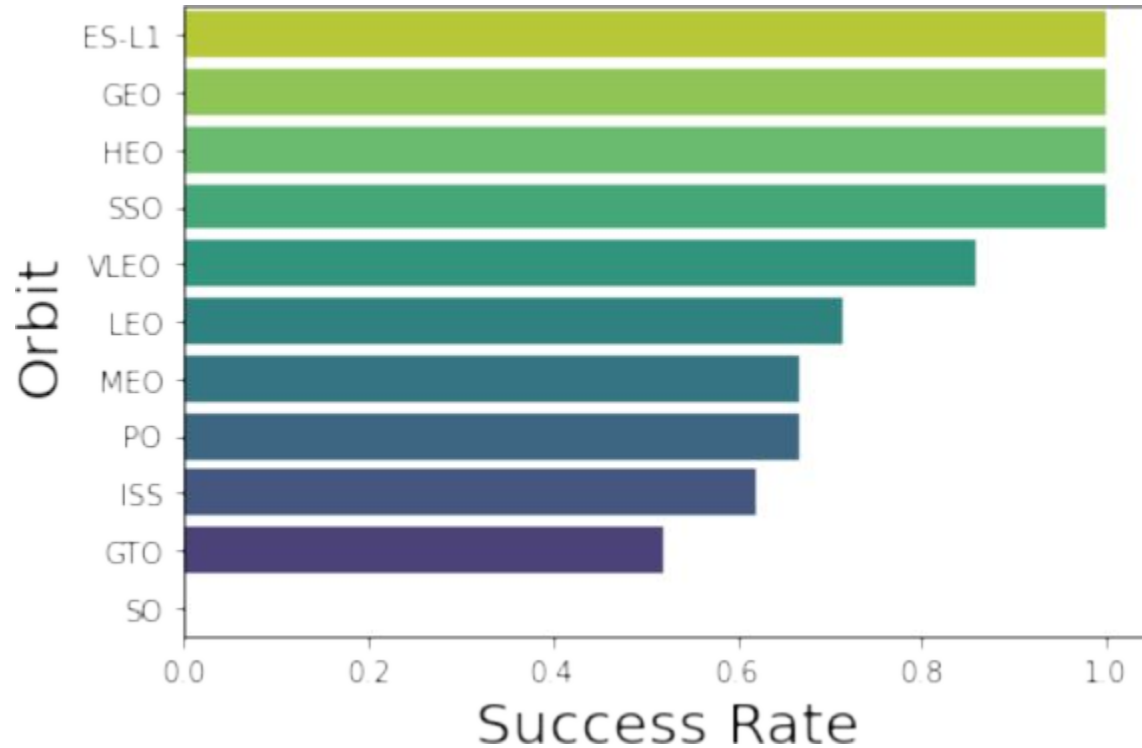


Flight Number vs. Orbit type

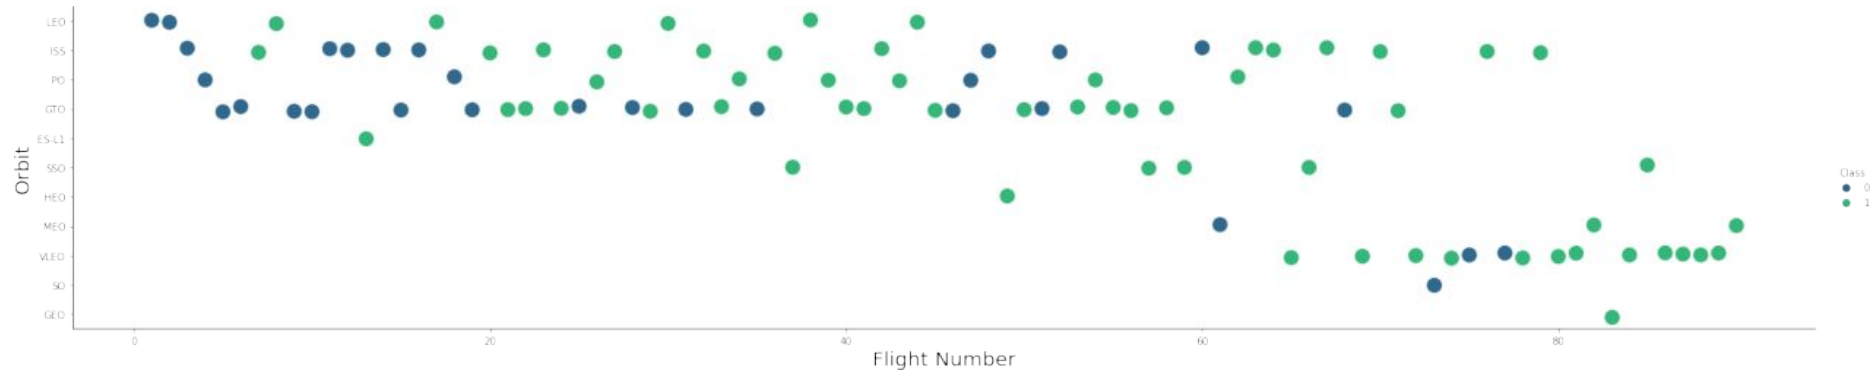

Payload vs. Orbit type

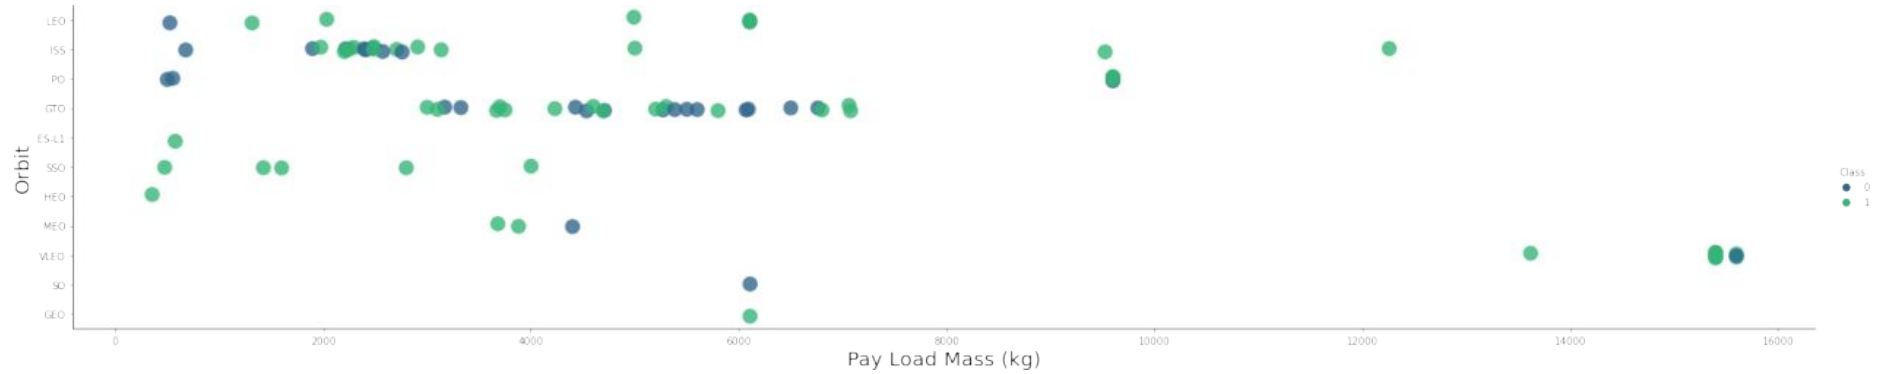

Launch Success Yearly Trend

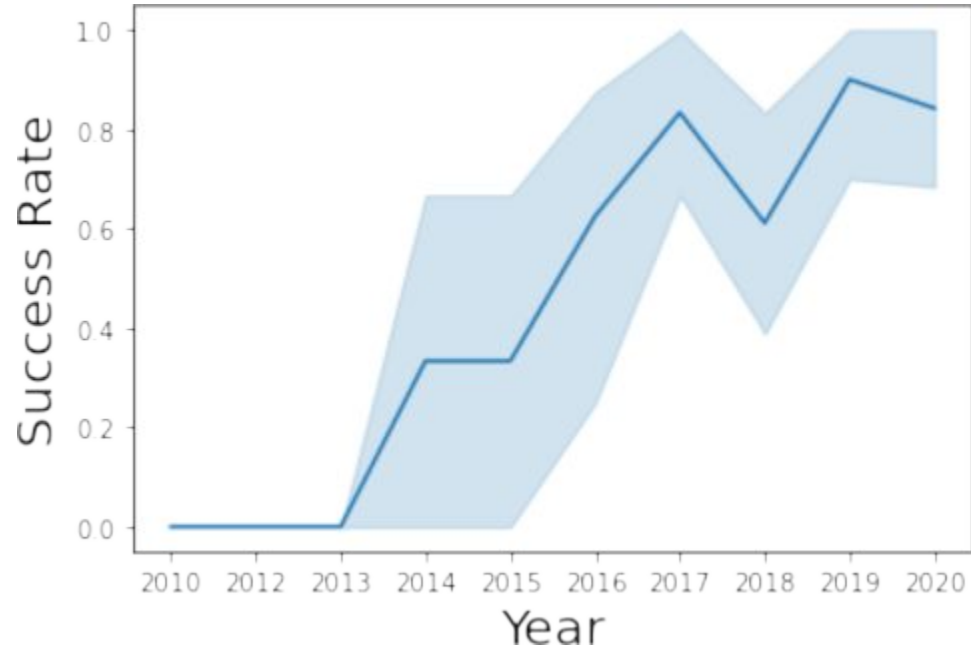

EDA with SQL

Launch Site Names Beginning with `CCA`

In [5]:

```
%%sql
SELECT *
FROM SPACEXDATASET
WHERE LAUNCH_SITE LIKE 'CCA%'
LIMIT 5;
```

* ibm_db_sa://ftb12020:***@ec77d6f2-5da9-48a9-81f8-86b520b87518.bs2io90l08kqb1od8lcg.databases.appdomain.cloud:31198/bludb
Done.

Out[5]:

DATE	time_utc	booster_version	launch_site	payload	payload_mass_kg	orbit	customer	mission_outcome	landing_outcome
2010-06-04	18:45:00	F9 v1.0 B0003	CCAFS LC-40	Dragon Spacecraft Qualification Unit	0	LEO	SpaceX	Success	Failure (parachute)
2010-12-08	15:43:00	F9 v1.0 B0004	CCAFS LC-40	Dragon demo flight C1, two CubeSats, barrel of Brouere cheese	0	LEO (ISS)	NASA (COTS) NRO	Success	Failure (parachute)
2012-05-22	07:44:00	F9 v1.0 B0005	CCAFS LC-40	Dragon demo flight C2	525	LEO (ISS)	NASA (COTS)	Success	No attempt
2012-10-08	00:35:00	F9 v1.0 B0006	CCAFS LC-40	SpaceX CRS-1	500	LEO (ISS)	NASA (CRS)	Success	No attempt
2013-03-01	15:10:00	F9 v1.0 B0007	CCAFS LC-40	SpaceX CRS-2	677	LEO (ISS)	NASA (CRS)	Success	No attempt

Total Payload Mass from NASA

```
%%sql
SELECT SUM(PAYLOAD_MASS__KG_) AS SUM_PAYLOAD_MASS_KG
FROM SPACEXDATASET
WHERE CUSTOMER = 'NASA (CRS)';

* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81f8-86
Done.
```

sum_payload_mass_kg

45596

Average Payload Mass by F9 v1.1

```
%%sql
SELECT AVG(PAYLOAD_MASS__KG_) AS AVG_PAYLOAD_MASS_KG
FROM SPACEXDATASET
WHERE booster_version = 'F9 v1.1'
```

```
* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81f8-86
Done.
```

avg_payload_mass_kg

2928

First Successful Ground Pad Landing Date

```
%%sql
SELECT MIN(DATE) AS FIRST_SUCCESS
FROM SPACEXDATASET
WHERE landing__outcome = 'Success (ground pad)';

* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81
Done.
```

first_success

2015-12-22

Successful Drone Ship Landing with Payload Between 4000 and 6000

```
%%sql
SELECT booster_version
FROM SPACEXDATASET
WHERE landing__outcome = 'Success (drone ship)' AND payload_mass__kg_ BETWEEN 4001 AND 5999;

* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81f8-86b520b87518.bs2io90l08kqb1od8l1cg.database
Done.
```

booster_version
F9 FT B1022
F9 FT B1026
F9 FT B1021.2
F9 FT B1031.2

Total Number of Each Mission Outcome

```
%%sql
SELECT mission_outcome, COUNT(*) AS no_outcome
FROM SPACEXDATASET
GROUP BY mission_outcome;
```

```
* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-:
Done.
```

mission_outcome	no_outcome
Failure (in flight)	1
Success	99
Success (payload status unclear)	1

Boosters that Carried Maximum Payload

```
%%sql
SELECT booster_version, PAYLOAD_MASS_KG_
FROM SPACEXDATASET
WHERE PAYLOAD_MASS_KG_ = (SELECT MAX(PAYLOAD_MASS_KG_) FROM SPACEXDATASET);

* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81f8-86b520b87518.bs2io90l08kqb1
Done.
```

booster_version	payload_mass_kg_
F9 B5 B1048.4	15600
F9 B5 B1049.4	15600
F9 B5 B1051.3	15600
F9 B5 B1056.4	15600
F9 B5 B1048.5	15600
F9 B5 B1051.4	15600
F9 B5 B1049.5	15600
F9 B5 B1060.2	15600
F9 B5 B1058.3	15600
F9 B5 B1051.6	15600
F9 B5 B1060.3	15600
F9 B5 B1049.7	15600

2015 Failed Drone Ship Landing Records

```
%%sql
SELECT MONTHNAME(DATE) AS MONTH, landing__outcome, booster_version, PAYLOAD_MASS__KG_, launch_site
FROM SPACEXDATASET
WHERE landing__outcome = 'Failure (drone ship)' AND YEAR(DATE) = 2015;

* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81f8-86b520b87518.bs2io90l08kqb1od8l1cg.databases.app
Done.
```

MONTH	landing__outcome	booster_version	payload_mass__kg_	launch_site
January	Failure (drone ship)	F9 v1.1 B1012	2395	CCAFS LC-40
April	Failure (drone ship)	F9 v1.1 B1015	1898	CCAFS LC-40


Ranking Counts of Successful Landings Between 2010-06-04 and 2017-03-20

```
%%sql
SELECT landing__outcome, COUNT(*) AS no_outcome
FROM SPACEXDATASET
WHERE landing__outcome LIKE 'Success%' AND DATE BETWEEN '2010-06-04' AND '2017-03-20'
GROUP BY landing__outcome
ORDER BY no_outcome DESC;
```


```
* ibm_db_sa://ftb12020:***@0c77d6f2-5da9-48a9-81f8-86b520b87518.bs2io90l08kqb1od8lce
Done.
```

landing__outcome	no_outcome
Success (drone ship)	5
Success (ground pad)	3


Interactive Launch site analysis with Folium

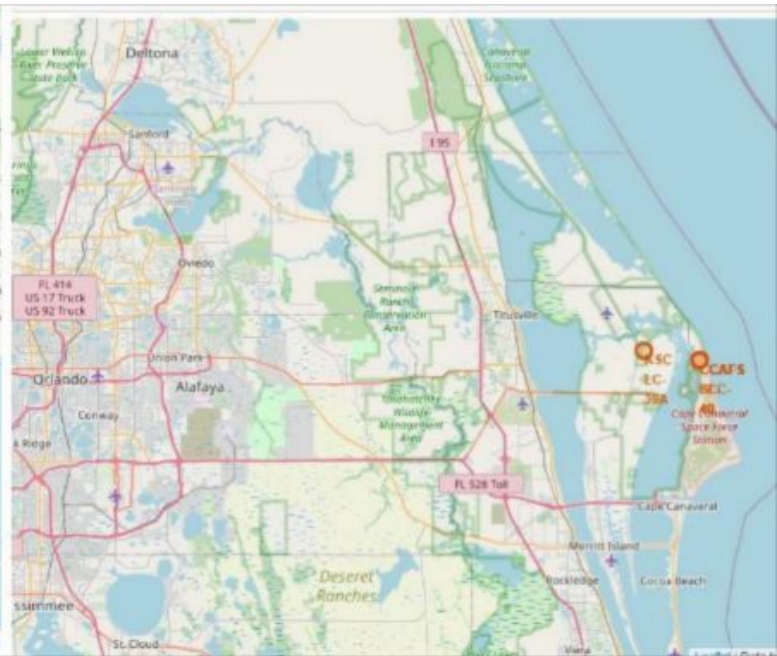

Color-Coded Launch Markers

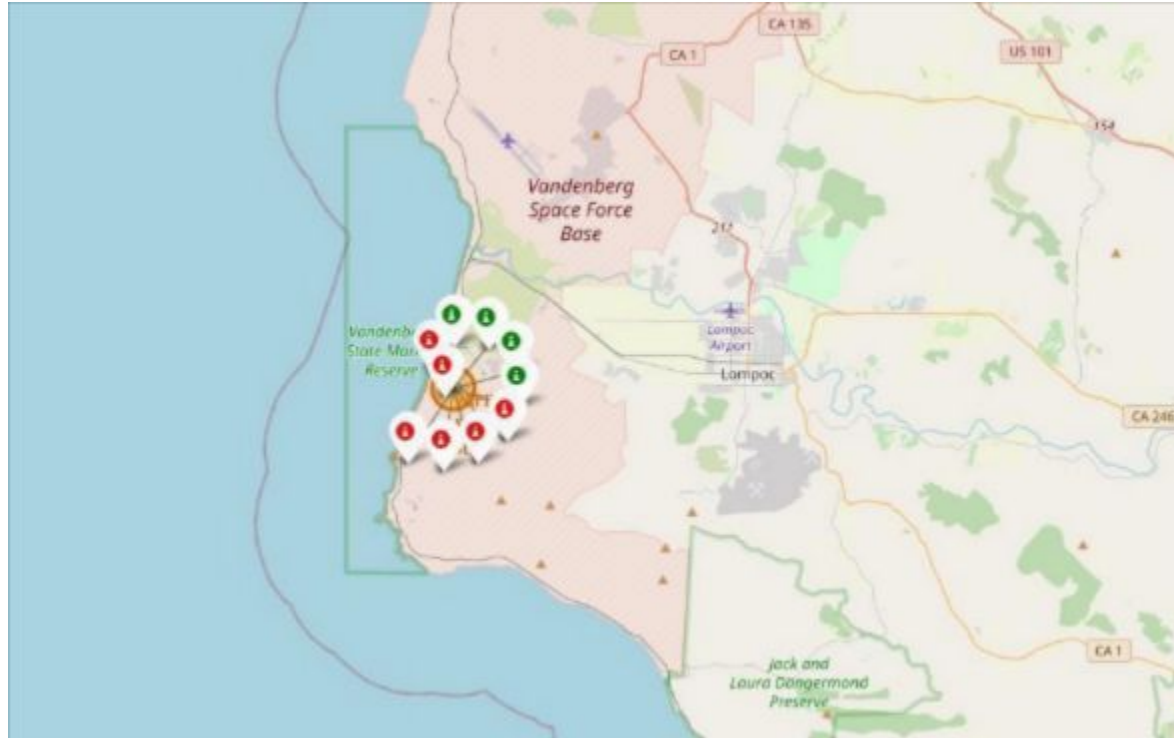


Key Location Proximities

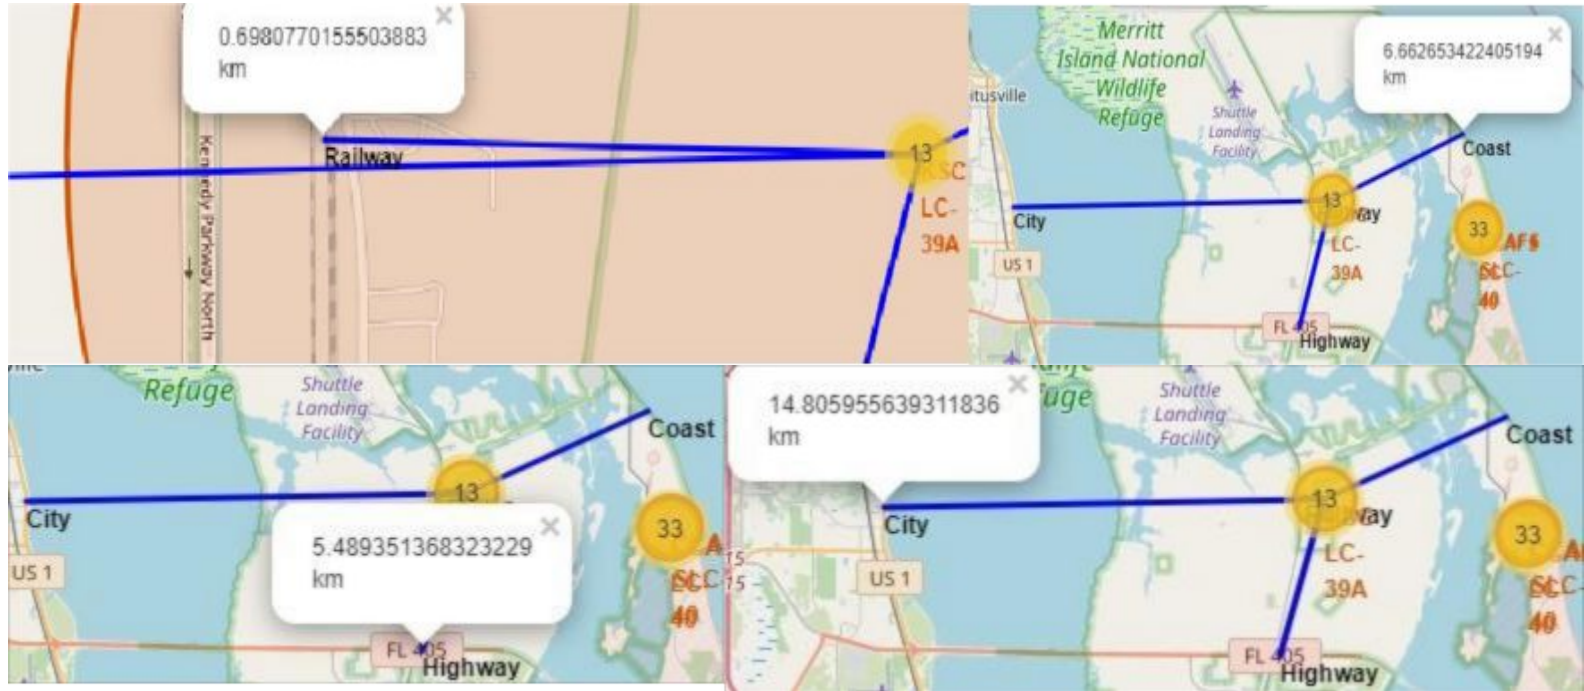


Dashboard with Plotly Dash

Successful Launch Sites

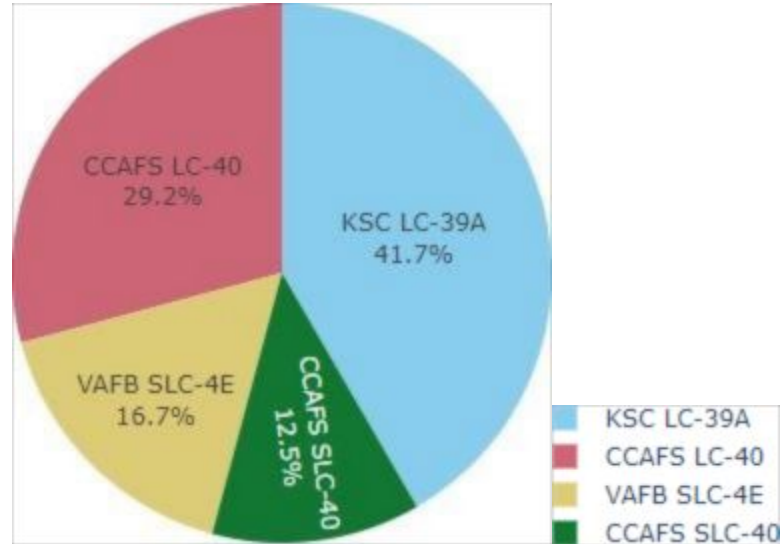

Highest Success Rate Launch Sit

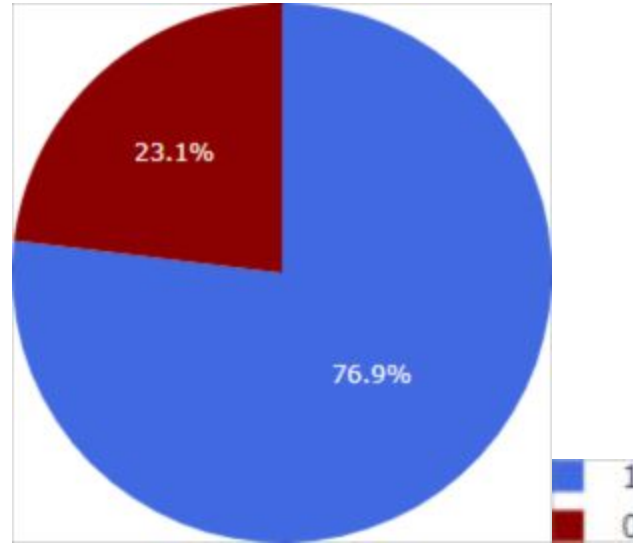

Confusion Matrix



Conclusion

- Model Performance: The models performed similarly on the test set with the decision tree model slightly outperforming
- Equator: Most of the launch sites are near the equator for an additional natural boost - due to the rotational speed of earth - which helps save the cost of putting in extra fuel and boosters
- Coast: All the launch sites are close to the coast
- Launch Success: Increases over time
- KSC LC-39A: Has the highest success rate among launch sites. Has a 100% success rate for launches less than 5,500 kg
- Orbits: ES-L1, GEO, HEO, and SSO have a 100% success rate
- Payload Mass: Across all launch sites, the higher the payload mass (kg), the higher the success rate

Appendix

Github link: https://github.com/mathhewRomy/IBM_Data_Science