


Secure your apps and your clusters with Anthos Service Mesh

Mathieu Benoit


2022-01-10

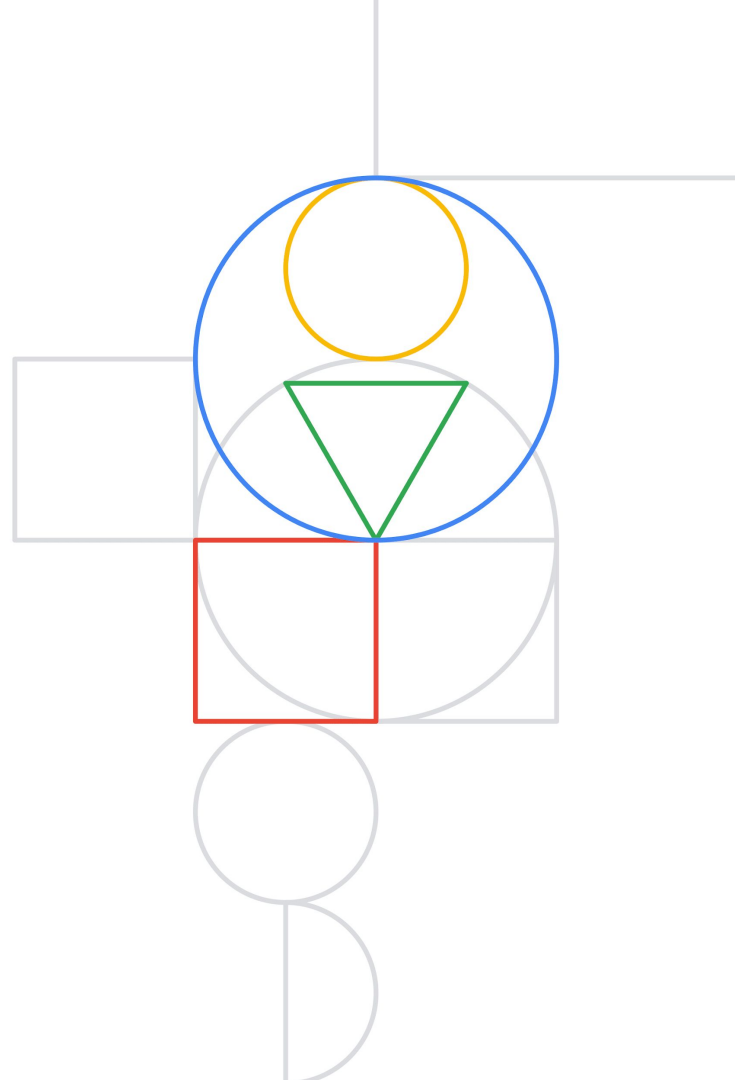


Features covered

1. Install a secure ASM 1.12
2. Enable ASM
3. Enable mTLS STRICT
4. Configure a Sidecar
5. Define `AuthorizationPolicy`
6. Protect your Ingress `Gateway` with HTTPS GCLB and Cloud Armor
7. Wrap up: ASM in the GCP console

Before

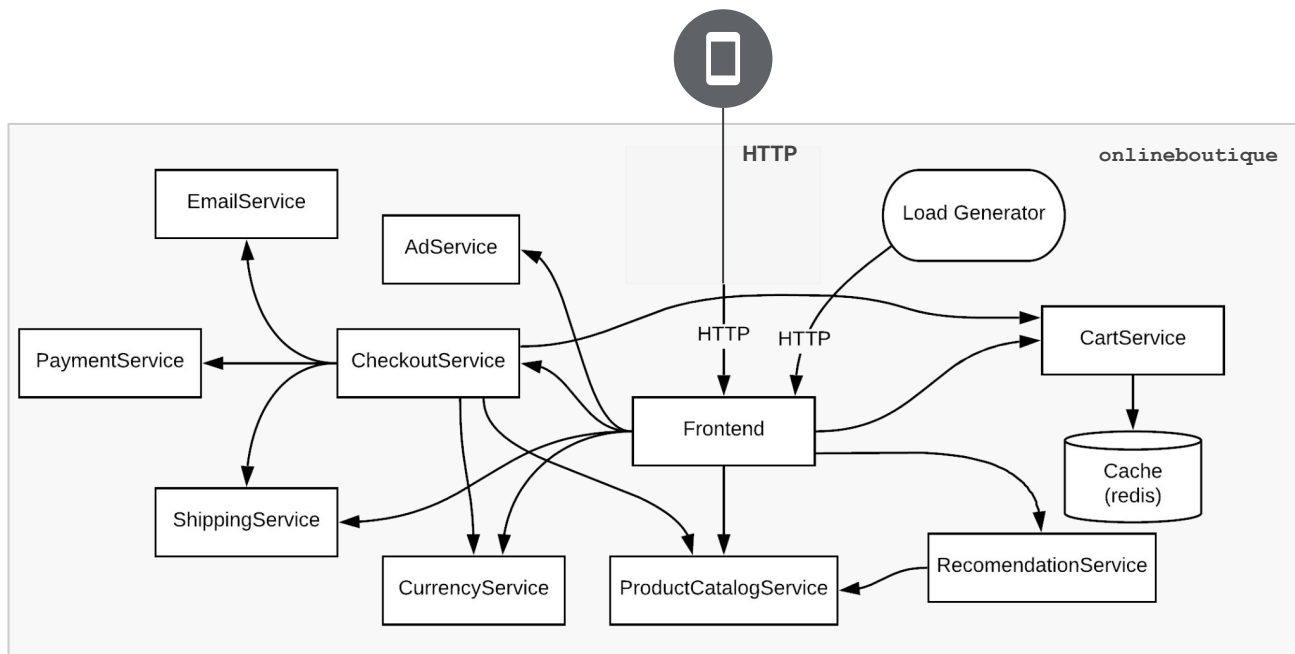

After

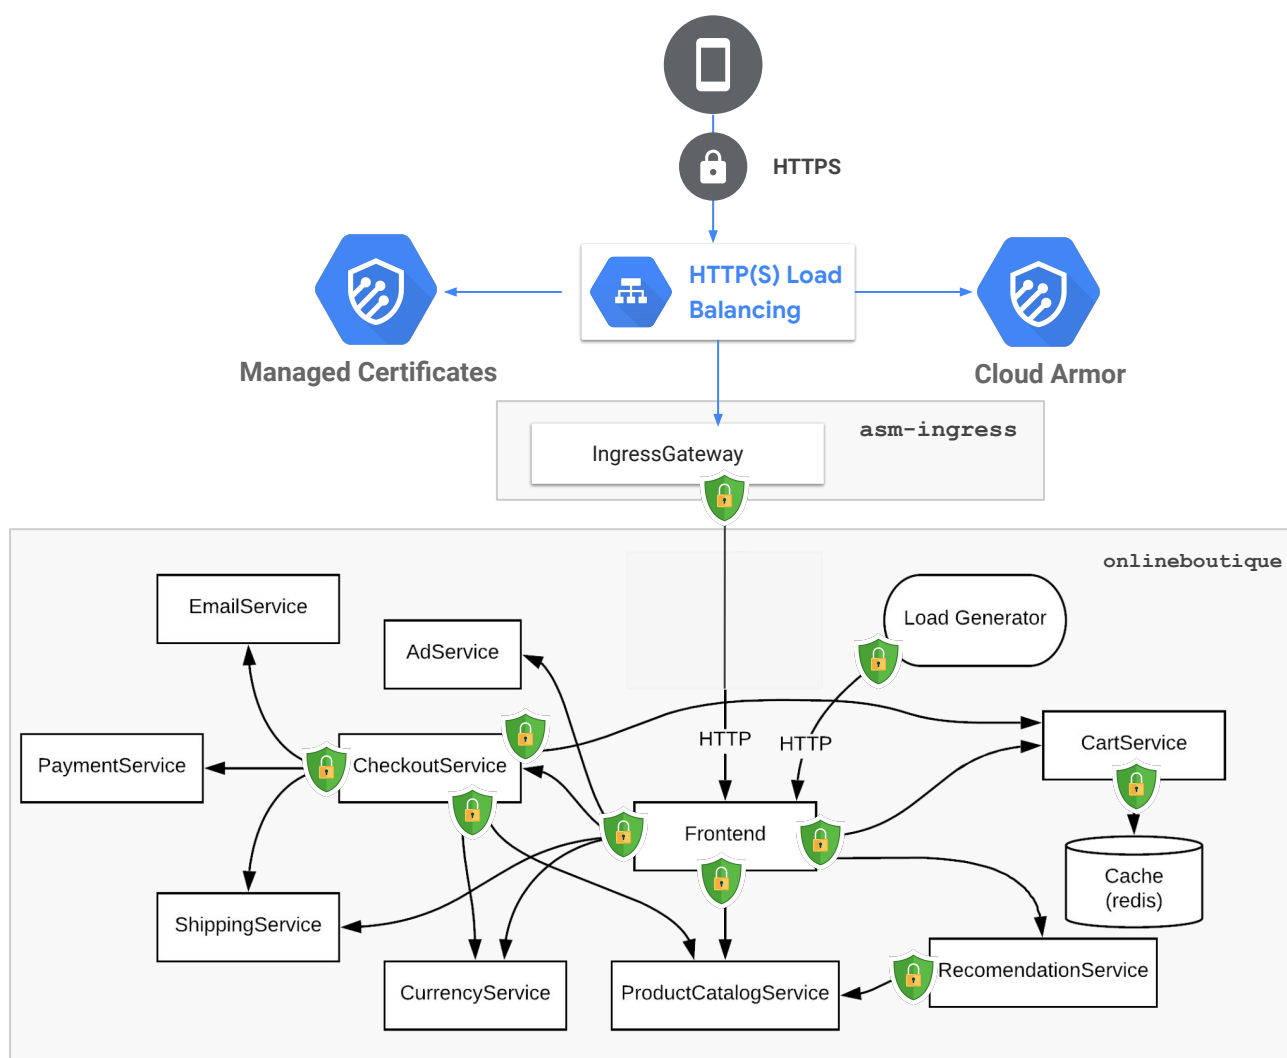

Install ASM on the cluster

```
TERMINAL

$ curl https://storage.googleapis.com/csm-artifacts/asm/asmcli_1.12 >
~/asmcli
$ chmod +x ~/asmcli

$ ~/asmcli install \
  --project_id $projectId \
  --cluster_name $clusterName \
  --cluster_location $zone \
  --enable-all \
  --option cni-gcp \
  --custom_overlay ditroless-proxy.yaml
```

```
# ditroless-proxy.yaml

---
apiVersion: install.istio.io/v1alpha1
kind: IstioOperator
spec:
  meshConfig:
    defaultConfig:
      image:
        imageType: distroless
```

Enable ASM within the onlineboutique namespace

```

$ ASM_REVISION=$(kubectl get deploy \
  -n istio-system \
  -l app=istiod \
  -o jsonpath={.items[*].metadata.labels.'istio\.io\/rev'}{"\n"})

$ kubectl label namespace onlineboutique \
  istio-injection- istio.io/rev=$ASM_REVISION \
  --overwrite

$ kubectl rollout restart deployments \
  -n onlineboutique

```

Configure a Sidecar in the onlineboutique namespace


```
TERMINAL

$ kubectl apply -f sidecar.yaml \
  -n onlineboutique
```

```
# sidecar.yaml

apiVersion:
networking.istio.io/v1beta1
kind: Sidecar
metadata:
  name: default
spec:
  egress:
  - hosts:
    - ".*/*"
    - "istio-system/*"
```

Enable mTLS strict within the onlineboutique namespace

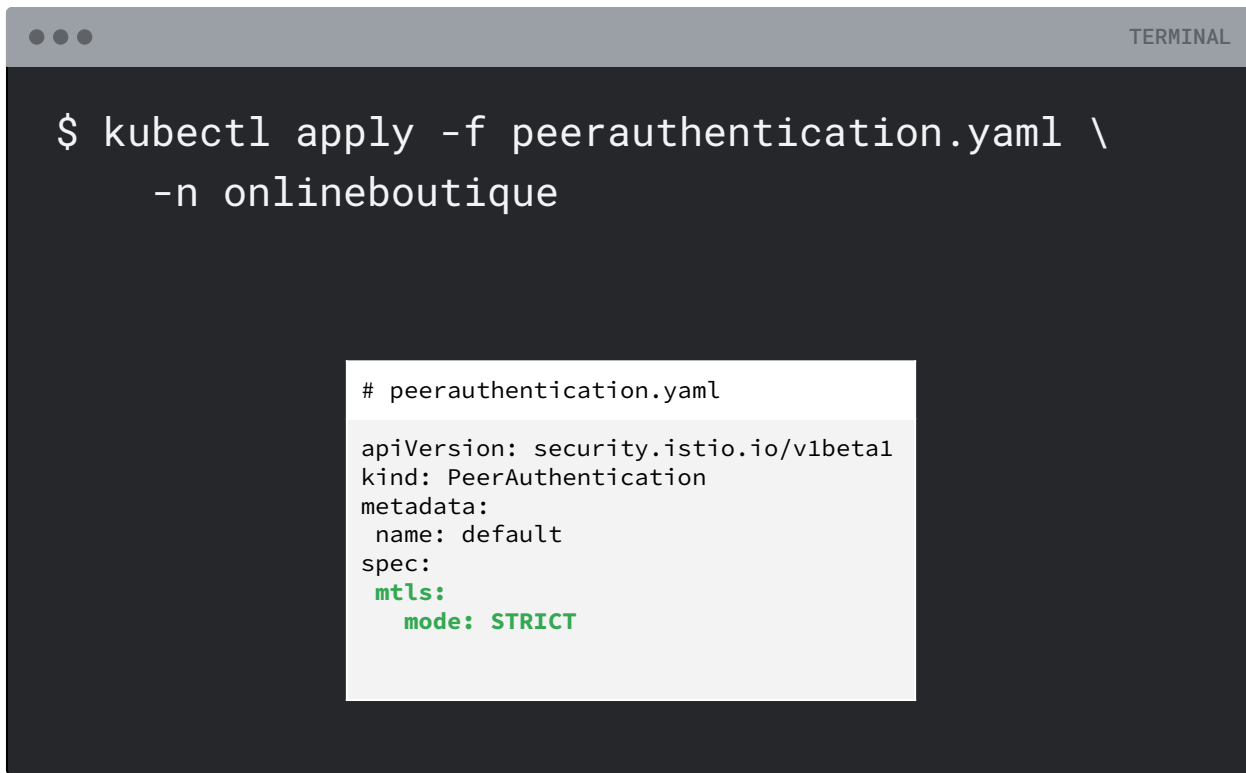

A terminal window with a dark background and a light gray title bar containing three window control buttons on the left and the word "TERMINAL" on the right. The terminal displays a `kubectl` command to apply a YAML file to the `onlineboutique` namespace. Below the command, a white box contains a snippet of the `peerauthentication.yaml` file, which defines a `PeerAuthentication` resource with `mtls: STRICT`.

```
$ kubectl apply -f peerauthentication.yaml \
  -n onlineboutique
```

```
# peerauthentication.yaml

apiVersion: security.istio.io/v1beta1
kind: PeerAuthentication
metadata:
  name: default
spec:
  mtls:
    mode: STRICT
```


Setup Cloud Armor and a public static IP address

log4shell

```

$ gcloud compute security-policies create asm-ingressgateway \
  --description "Block XSS attacks"
$ gcloud compute security-policies rules create 1000 \
  --security-policy asm-ingressgateway \
  --expression "evaluatePreconfiguredExpr('xss-stable')" \
  --action "deny-403" \
  --description "XSS attack filtering"
$ gcloud compute security-policies rules create 12345 \
  --security-policy asm-ingressgateway \
  --expression "evaluatePreconfiguredExpr('cve-canary')" \
  --action "deny-403" \
  --description "CVE-2021-44228 and CVE-2021-45046"

$ gcloud compute addresses create asm-ingressgateway --global
```

Setup Ingress Gateway with HTTPS/GCLB

```
$ kubectl apply -f ingress.yaml service.yaml backendconfig.yaml  
managedcertificate.yaml -n asm-ingress
```

```
# ingress.yaml
```

```
apiVersion: networking.k8s.io/v1  
kind: Ingress  
metadata:  
  name: asm-ingressgateway  
  annotations:  
    kubernetes.io/ingress.global-static-ip-name: asm-ingressgateway  
    networking.gke.io/managed-certificates: onlineboutique  
spec:  
  rules:  
    - host: "*"
      http:  
        paths:  
          - path: /*  
            pathType: ImplementationSpecific  
            backend:  
              service:  
                name: asm-ingressgateway  
                port:  
                  number: 80
```

```
# backendconfig.yaml
```

```
apiVersion: cloud.google.com/v1  
kind: BackendConfig  
metadata:  
  name: asm-ingressgateway  
spec:  
  healthCheck:  
    requestPath: /healthz/ready  
    port: 15021  
    type: HTTP  
  securityPolicy:  
    name: asm-ingressgateway
```

```
# service.yaml
```

```
apiVersion: v1  
kind: Service  
metadata:  
  name: asm-ingressgateway  
  annotations:  
    cloud.google.com/neg: '{"ingress": true}'  
    cloud.google.com/backend-config: '{"default": "asm-ingressgateway"}'  
  labels:  
    app: asm-ingressgateway  
    asm: ingressgateway  
spec:  
  ports:  
    - name: status-port  
      port: 15021  
      protocol: TCP  
      targetPort: 15021  
    - name: http2  
      port: 80  
      targetPort: 8081  
    - name: https  
      port: 443  
      targetPort: 8443  
  selector:  
    asm: ingressgateway  
    app: asm-ingressgateway  
  type: ClusterIP
```

```
# managedcertificate.yaml
```

```
apiVersion: networking.gke.io/v1  
kind: ManagedCertificate  
metadata:  
  name: onlineboutique  
spec:  
  selector:  
    domains:  
      - mydomain.com
```

Deploy the onlineboutique Gateway and VirtualService

```

$ kubectl apply -f gateway.yaml virtualservice.yaml \
  -n onlineboutique

```

gateway.yaml

apiVersion: networking.istio.io/v1alpha3
 kind: Gateway
 metadata:
 name: frontend
 spec:
 selector:
 asm: ingressgateway
 servers:
 - port:
 number: 80
 name: http
 protocol: HTTP
 hosts:
 - "*"

virtualservice.yaml

apiVersion: networking.istio.io/v1alpha3
 kind: VirtualService
 metadata:
 name: frontend
 spec:
 hosts:
 - "*"
 gateways:
 - frontend
 http:
 - route:
 - destination:
 host: frontend
 port:
 number: 80

Setup AuthorizationPolicy

```
$ kubectl apply -f authz-denyall.yaml authz-cartservice.yaml \
-n onlineboutique
```

```
# authz-denyall.yaml
```

```
apiVersion: security.istio.io/v1beta1
kind: AuthorizationPolicy
metadata:
  name: deny-all
spec:
  {}
```

```
# authz-cartservice.yaml
```

```
apiVersion: security.istio.io/v1beta1
kind: AuthorizationPolicy
metadata:
  name: cartservice
spec:
  selector:
    matchLabels:
      app: cartservice
  rules:
    - from:
        - source:
            principals: ["cluster.local/ns/onlineboutique/sa/frontend",
"cluster.local/ns/onlineboutique/sa/checkoutservice"]
            to:
              - operation:
                  paths: ["/hipstershop.CartService/AddItem",
"/hipstershop.CartService/GetCart", "/hipstershop.CartService/EmptyCart"]
                  methods: ["POST"]
```

That's a wrap!

Security PREVIEW

POLICY SUMMARY **POLICY AUDIT**

View workload policy statuses for each cluster and namespace.

Cluster
mygke

Namespace
onlineboutique

☐ Show system objects

Binary authorization



Enabled for this cluster

Kubernetes network policy



All workloads adhere to a network policy

Service access control




All workloads adhere to an authorization policy

mTLS status



mTLS is strict for all workloads

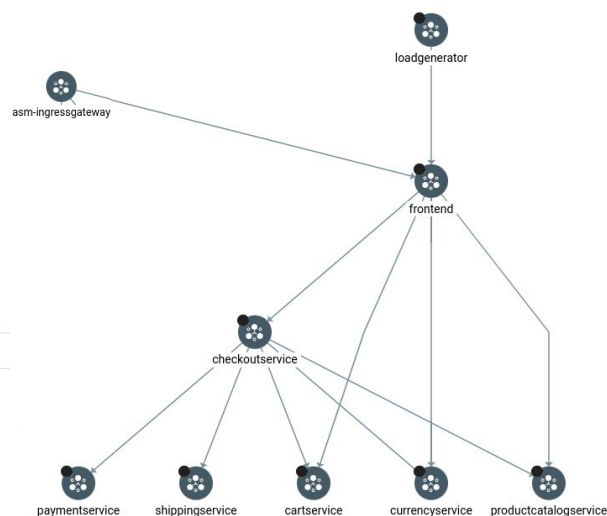

Workloads

Filter Is system object : False Namespace : onlineboutique Enter property name or value

Name ↑	Namespace	Type	Kubernetes network policy ?	Service access control	mTLS details
adservice	onlineboutique	Deployment	Enabled	Enabled	Strict
cartservice	onlineboutique	Deployment	Enabled	Enabled	Strict
checkoutservice	onlineboutique	Deployment	Enabled	Enabled	Strict
currencyservice	onlineboutique	Deployment	Enabled	Enabled	Strict
emailservice	onlineboutique	Deployment	Enabled	Enabled	Strict
frontend	onlineboutique	Deployment	Enabled	Enabled	Strict
loadgenerator	onlineboutique	Deployment	Enabled	Enabled	Strict
paymentservice	onlineboutique	Deployment	Enabled	Enabled	Strict
productcatalogservice	onlineboutique	Deployment	Enabled	Enabled	Strict
recommendationservice	onlineboutique	Deployment	Enabled	Enabled	Strict

Resources

See the entire story here: alwaysupalwayson.com/asm-security

Resources:

- [Istio by Examples](#) (thanks Megan!)
- [Secured Ingress Gateway](#) (thanks Ameer and Alex!)
- [Istio Security best practices](#)

Code used for this session:

- [asm-ingress manifests](#)
- [onlineboutique manifests](#)
- [mygkecluster setup](#)

Complementary to this, you should implement this below too:

- [Secured Egress Gateway](#) (thanks Ameer and James!)
- Network Policies
- Policy Controller / OPA Gatekeeper
- [Managed ASM \(managed control plane + data plane\)](#)

Thank you!

