

Workflows I designed and built

Mathieu Tellene · automation and AI operations · Cabify Spain

23

workflows

592

nodes


21

active in n8n

6

systems

Built in Cabify's Operational Excellence team in Spain. Each diagram is drawn from the workflow's real n8n export: node positions, types and connections are unchanged. Node labels are translated to English; client, supplier and people names, internal hosts, credentials and parameters are removed.

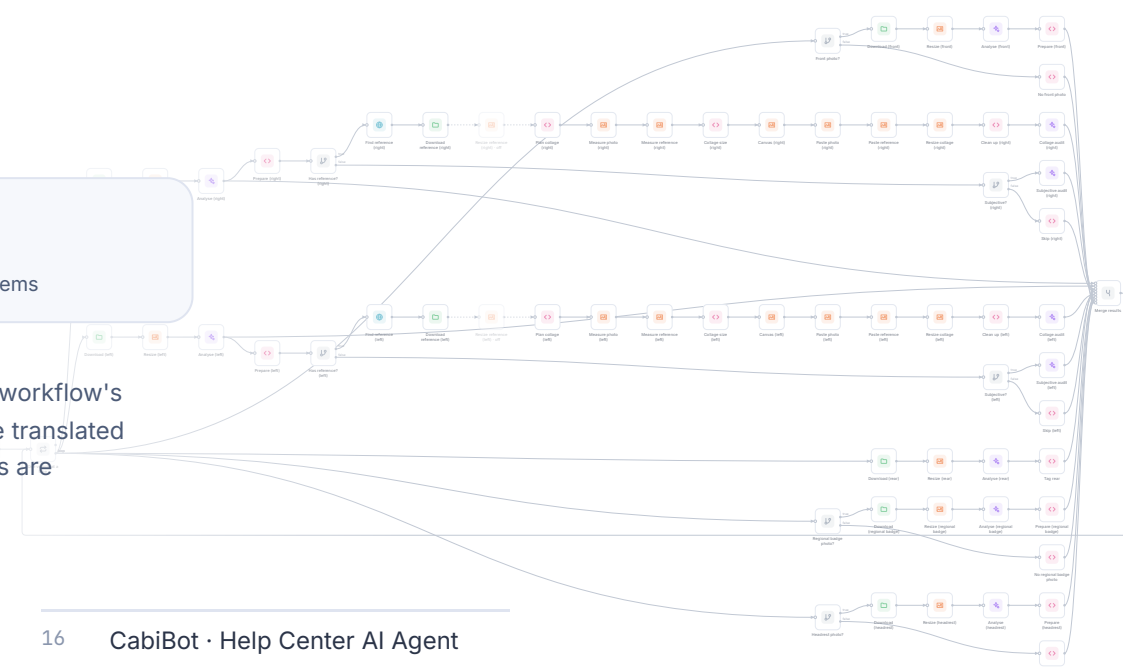

03 AQM · Asset Quality Management

17 Email-to-Reservation Pipeline (B2B)

08 WhatsApp Ride-Booking AI Agent

21 COPs Control · n8n version

16 CabiBot · Help Center AI Agent

22 Ops orchestrator (prototype)

New in this edition · a second B2B client whose emails are read by a model and whose rides are created on their own, the multi-client engine that books the ride with its driver in one call, and every diagram redrawn from the current exports.

How to read the diagrams


Each diagram is one n8n workflow and flow goes left to right.

Solid lines are the normal data flow; **dashed purple lines** connect an AI agent or chain to the model, memory, tools and output schema it can use, which sit below it as round nodes.

Triggers have a rounded left side. **Faded nodes** marked "off" are switched off in the workflow. Where a workflow is very wide it is folded into parts, and **numbered markers** show where a line continues.

The diagrams are vectors: zoom in on the large ones. What they do not show is prompts, credentials, parameters and data. The point is the structure: where the model sits, what it is allowed to touch, and what is plain code.

 Trigger	 AI / LLM
 HTTP / APIs	 Code
 Logic & flow	 Data & storage
 Google Workspace	 Messaging
 Files & images	 Sub-workflows

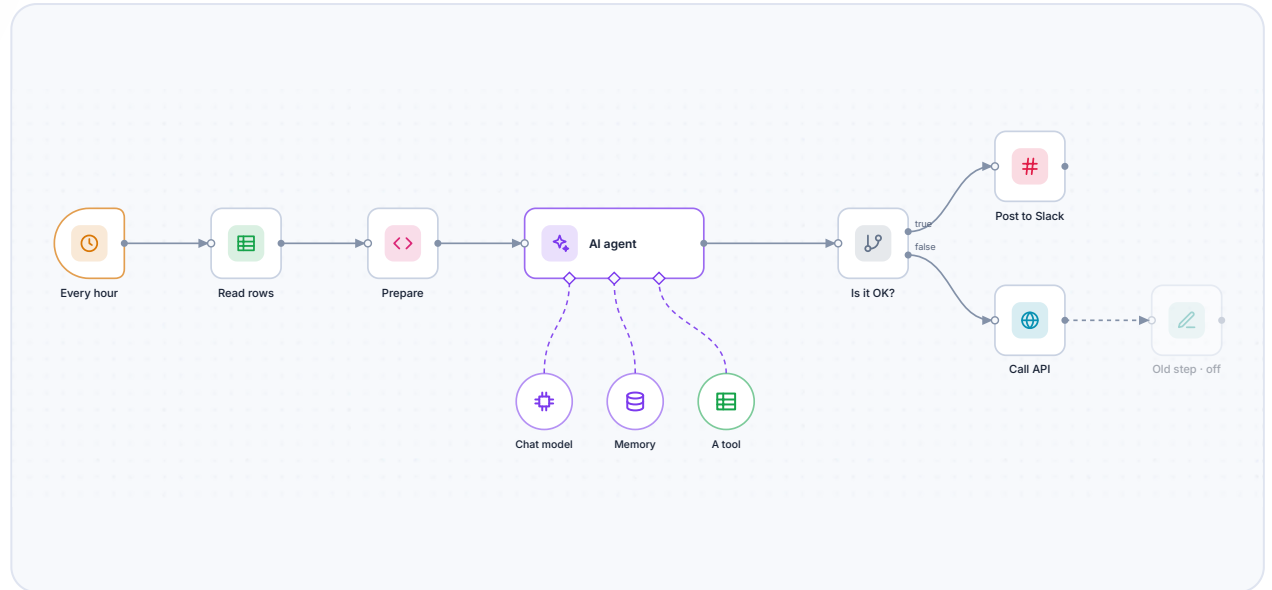

- **Rounded left side:** a trigger, where the workflow starts (schedule, webhook, mailbox, chat, another workflow).
- **Wide node with diamonds underneath:** an AI agent or chain; each diamond is a slot for a model, memory, tool or output schema.
- **Round node:** what plugs into those slots. A tool is often a narrow action on a sheet or another workflow, which is what limits what the model can touch.
- **true, false, loop, done:** the outputs of a condition or a loop.

SECTION

AQM • Asset Quality Management

Case study: mathieutellene.github.io/work/aqm.html


Drivers and wrapping suppliers photograph each car through web forms. A vision model compares every photo with the reference design for its vinyl type and side, and the verdicts land in one fleet database. 97% accuracy against human review.

Vehicle photo analysis (every 10 min)

74 nodes

active

Runs every 10 minutes and takes one pending vehicle at a time. Every photo (right, left, front, rear, headrest, regional badge) has its own branch: download, resize, and ask the model for a fixed JSON. Side photos also get a collage of the real photo next to the reference design for that vinyl type and side, and a strict comparison audit runs on it; designs without a reference get a subjective audit instead. A code node merges the branches by priority, adds up tokens and cost, and writes one verdict per field.

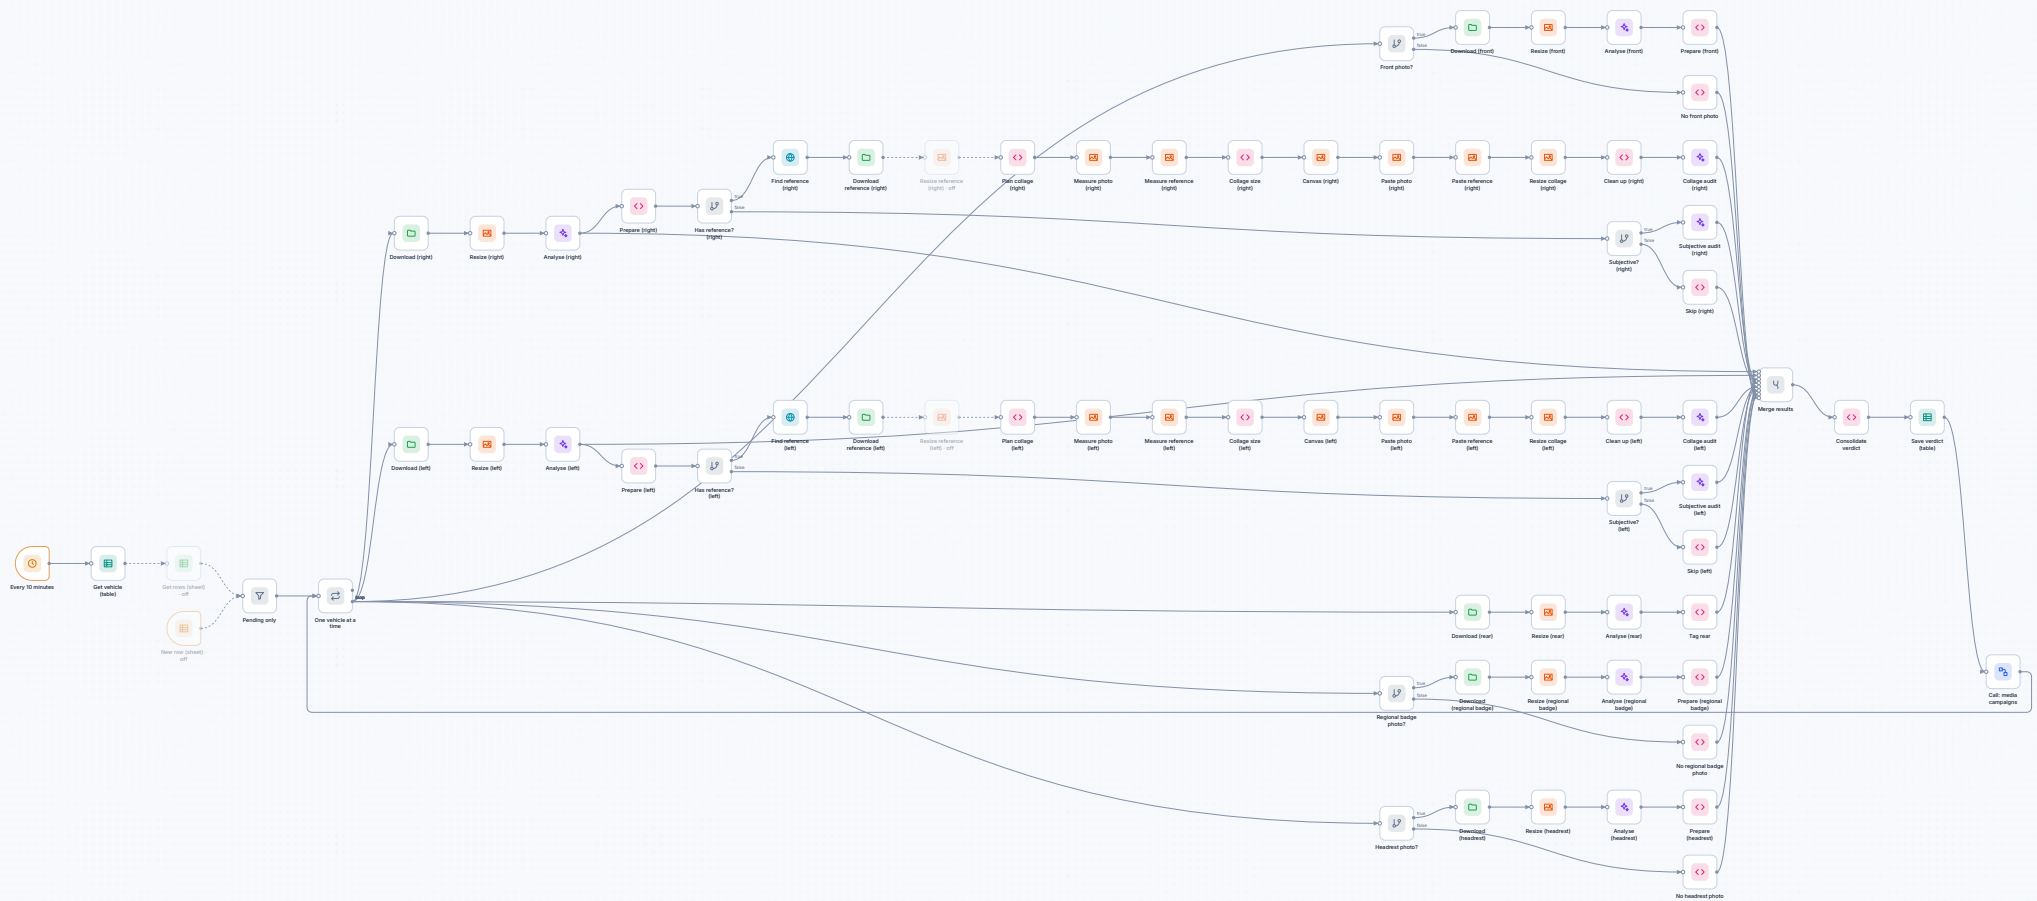


Form submission intake

15 nodes

active

The capture form posts here. Photos go to one Drive folder per photo type and the submission is saved at once, so the user gets an answer in seconds while the analysis runs later. A model reads the plate from the rear photo; if it disagrees with the typed plate, the row is corrected and Slack is told.

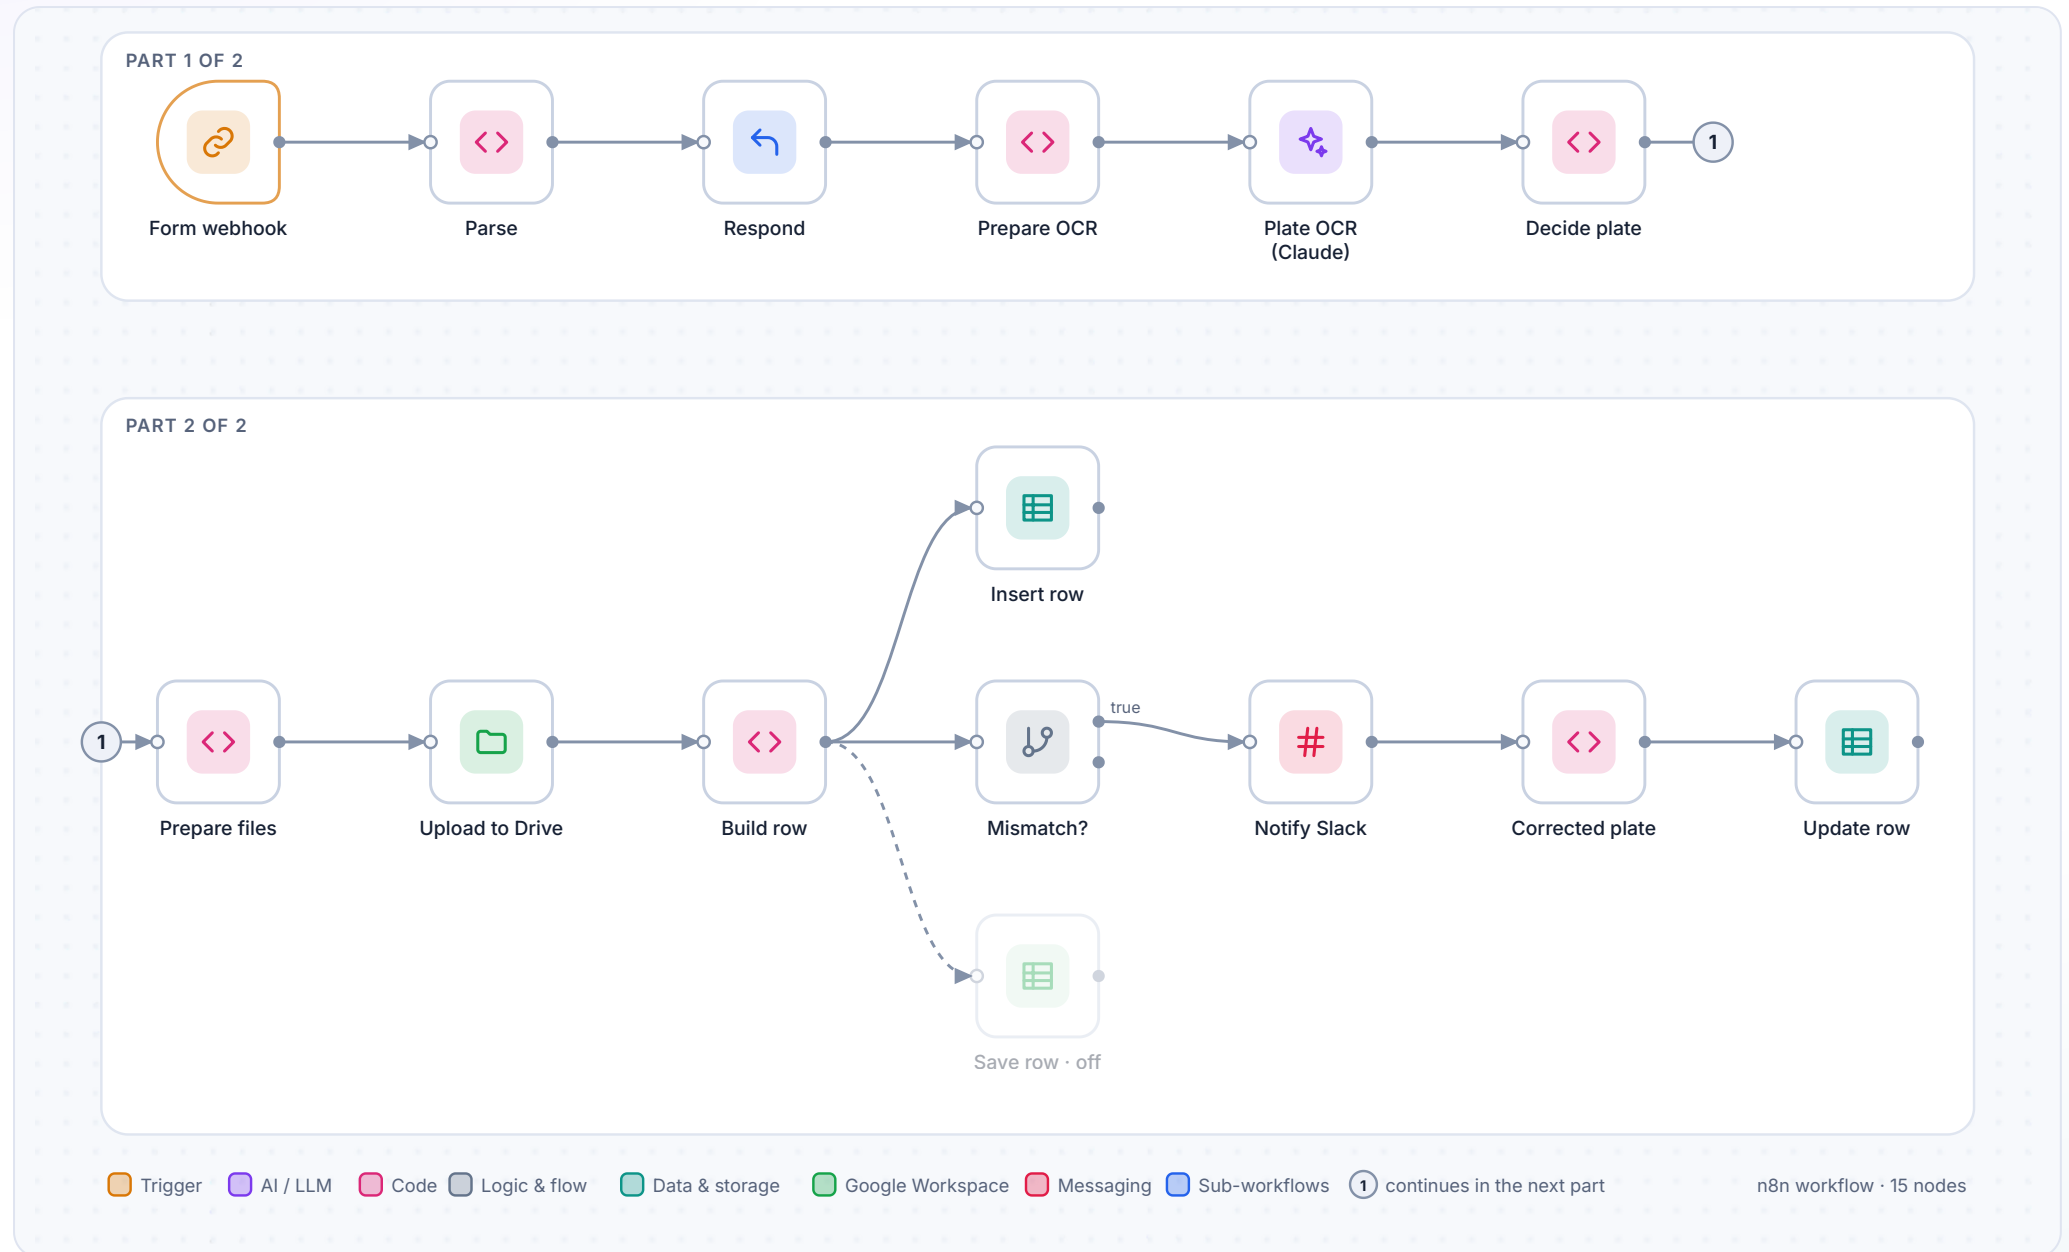

Live plate check

5 nodes

active

Reads the plate from a photo while the user is still on the form and returns it, so the form can warn about a mismatch. It never blocks a submission.



Trigger AI / LLM Code Sub-workflows


n8n workflow · 5 nodes

Fleet database sync

18 nodes

active


Keeps the fleet database in step with the analysis table. For cars wrapped for an advertising campaign, a model matches the free-text campaign answer from the form to the right campaign ID before the row is merged.

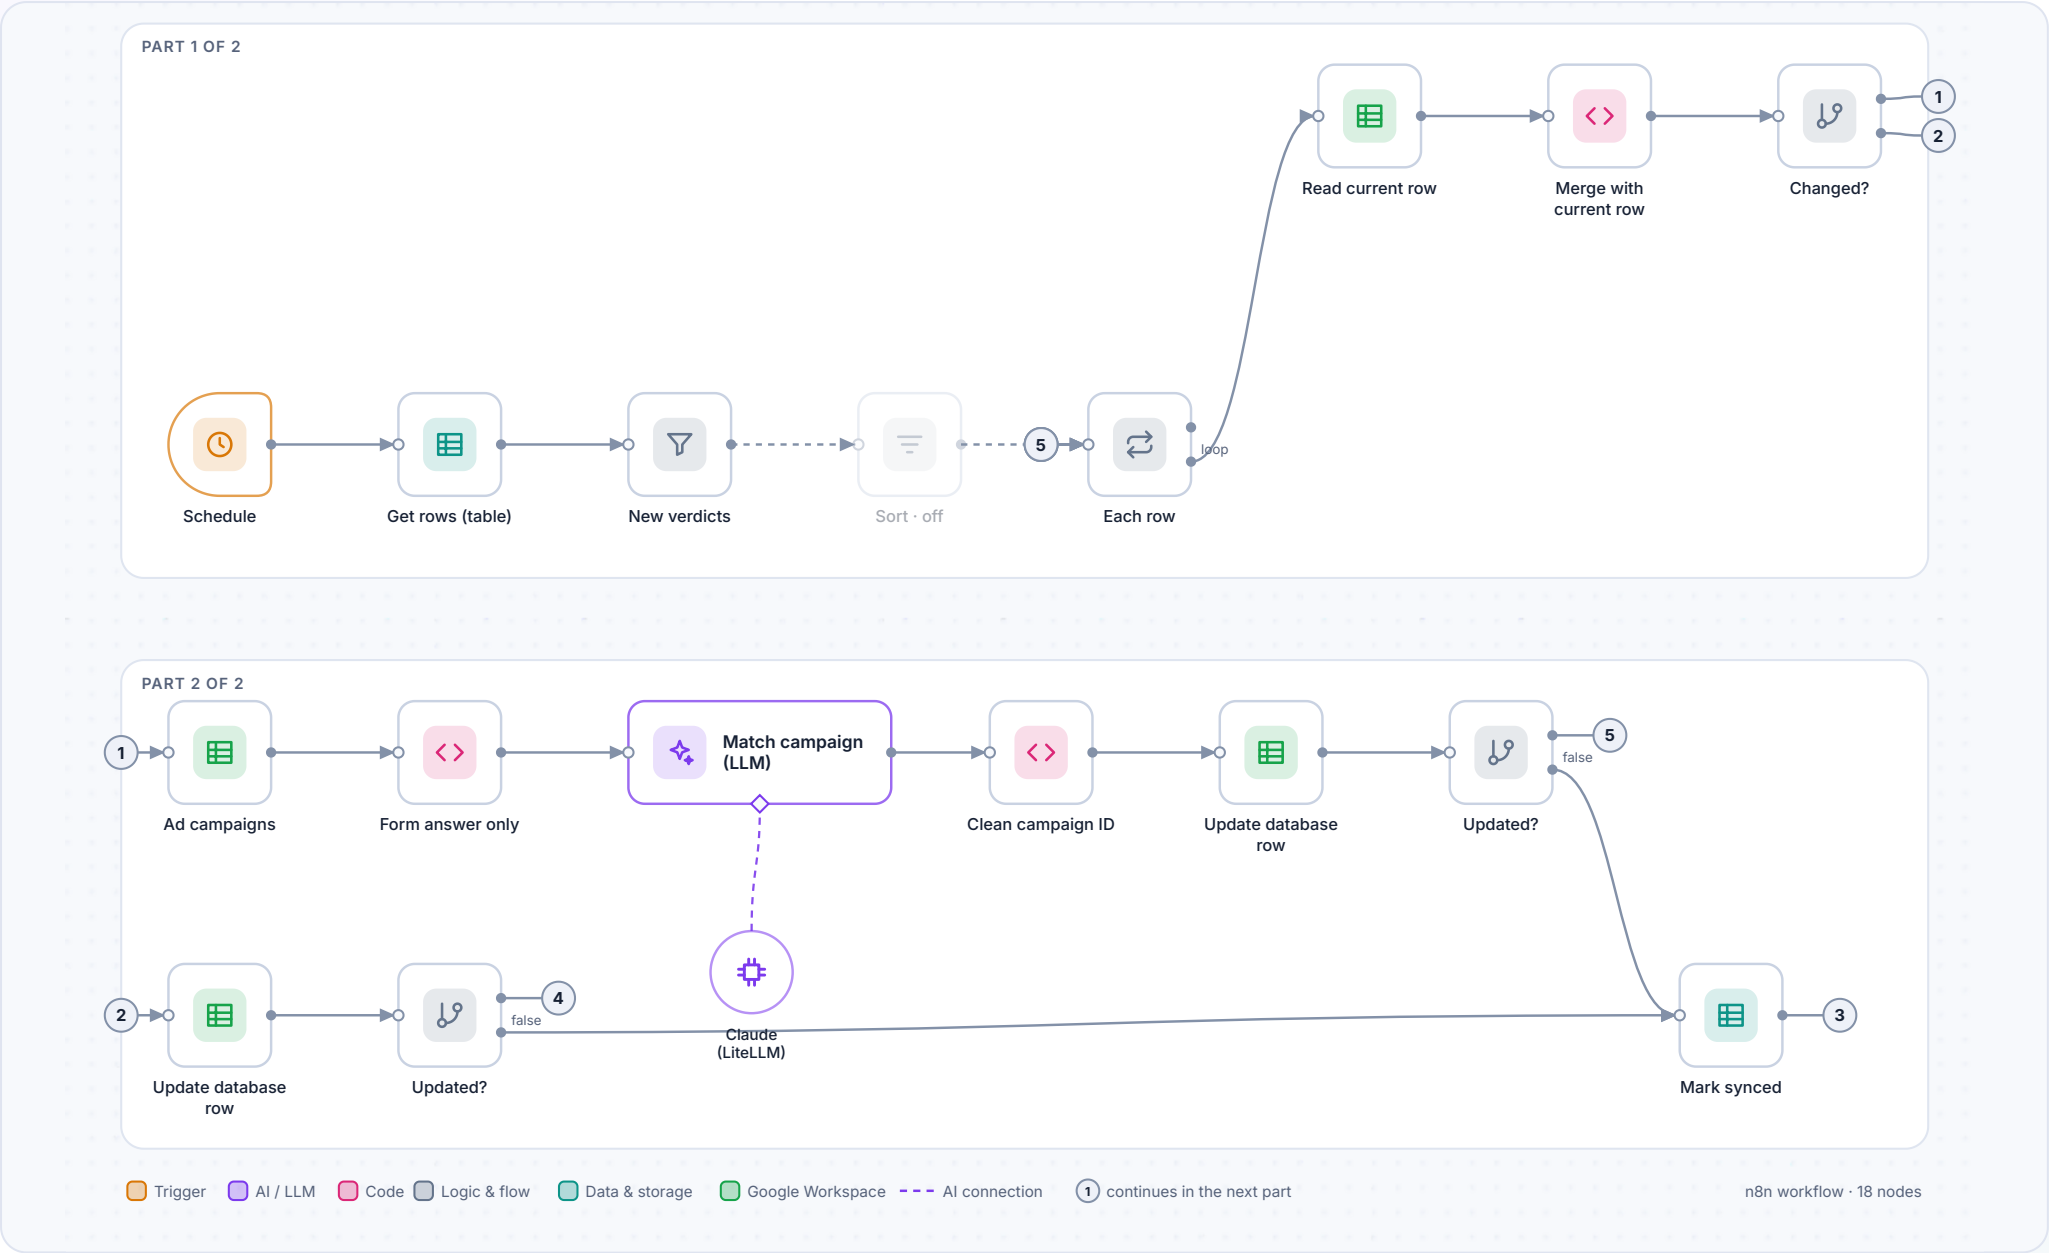

Media campaign vinyl analysis

25 nodes switched off

For cars wrapped for advertising campaigns: analyses the photos, matches the car to the campaign that pays for it and appends it to that campaign's tab. Switched off since the unified analysis took over.

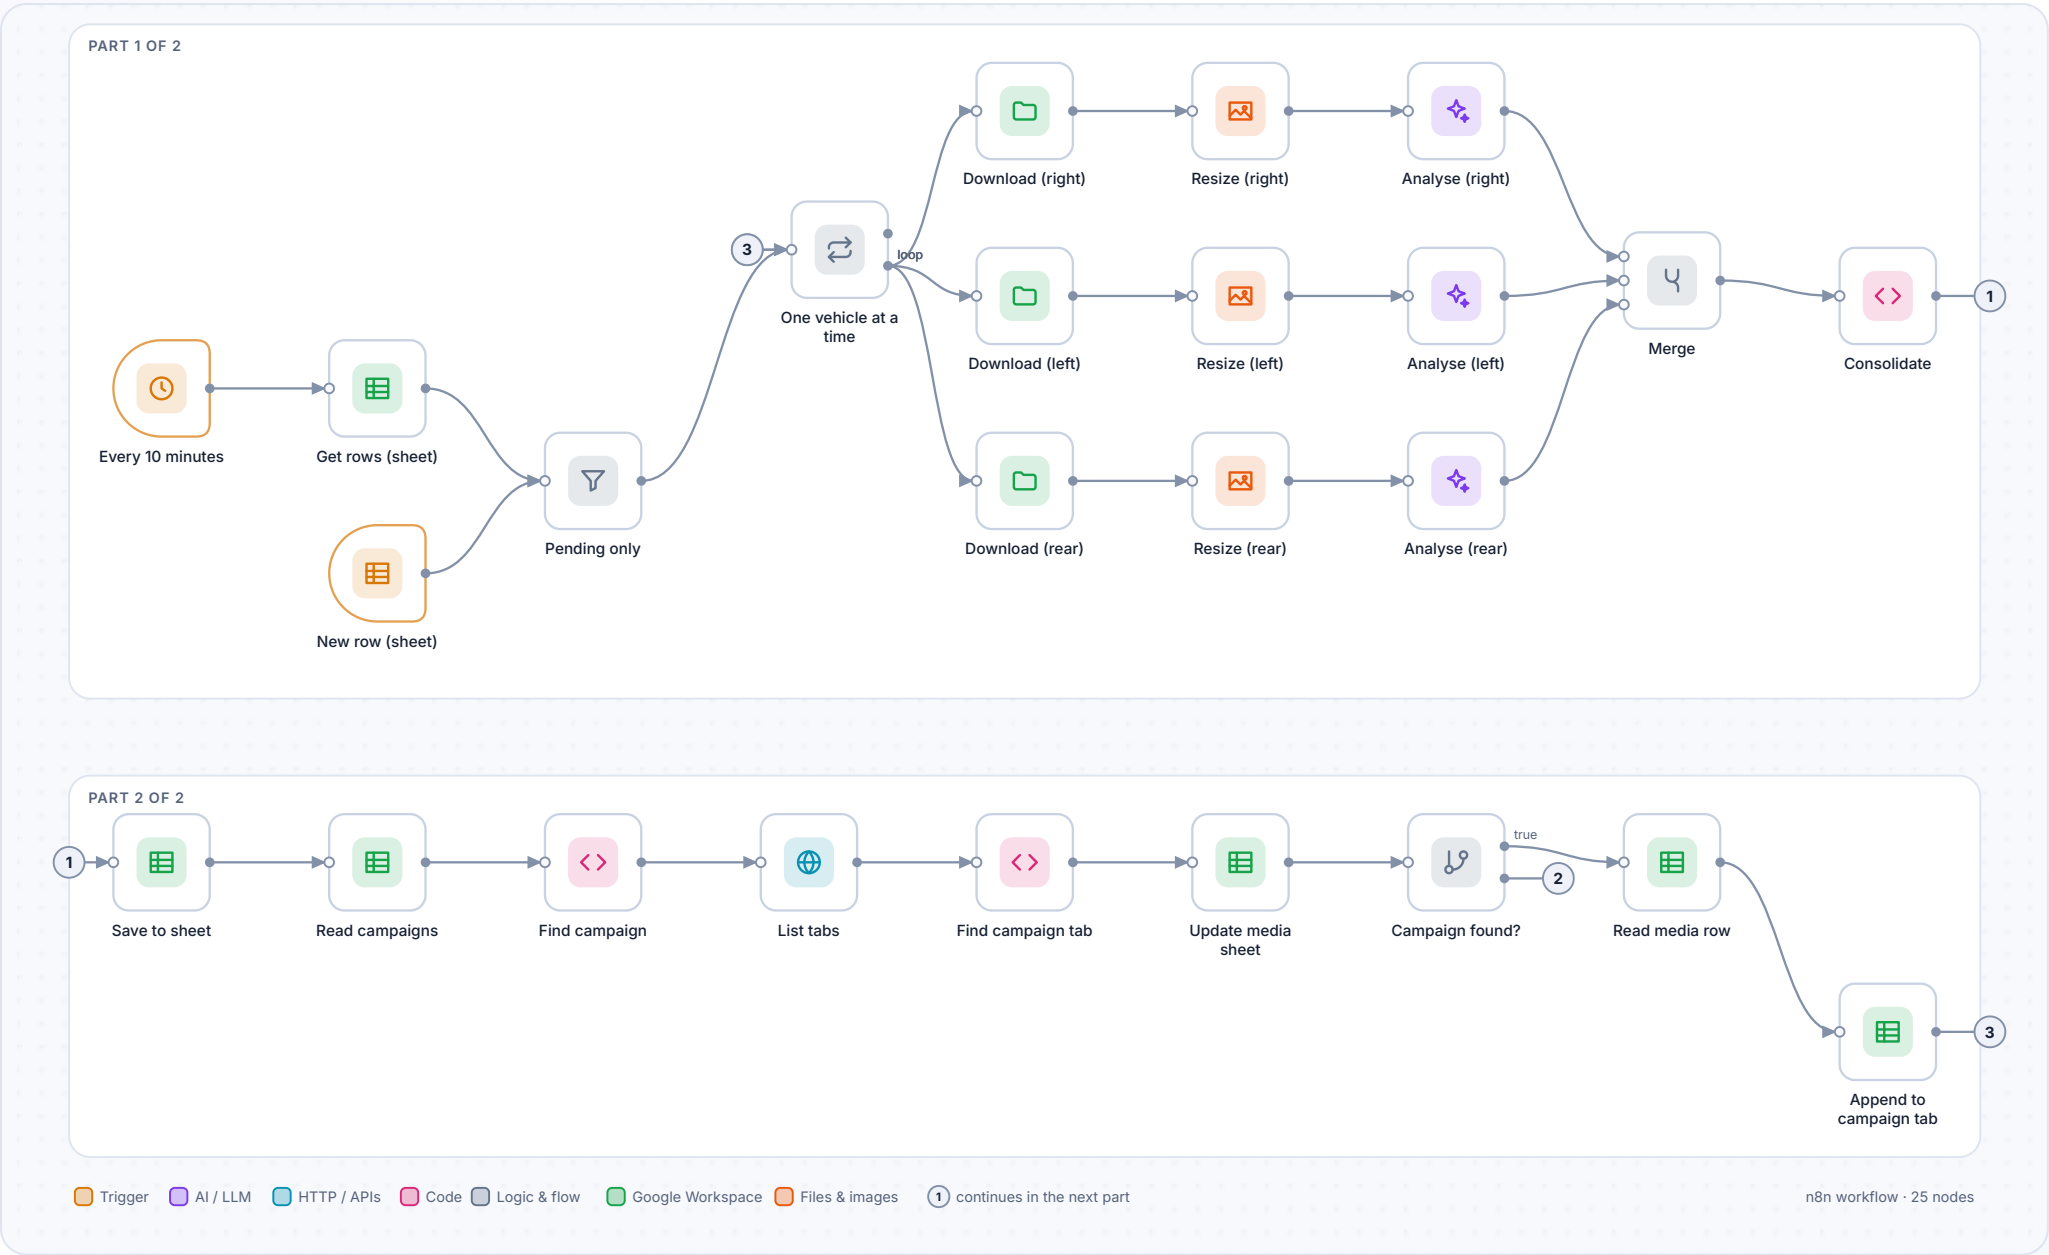

SECTION

WhatsApp Ride-Booking AI Agent

Case study: mathieutellene.github.io/work/whatsapp.html


Book a ride on WhatsApp without the app. A Claude agent runs the conversation in gated phases; the tools are separate workflows; state lives in Redis and a data table, and replies are chosen from fixed templates by markers in the model output.

WhatsApp booking agent

54 nodes

active

Entry point. A message-type switch and filters, then the agent with its memory and tools. After the agent, a router reads the marker in its output and sends one of the fixed reply formats (buttons, lists, map image, text), and every turn is logged.

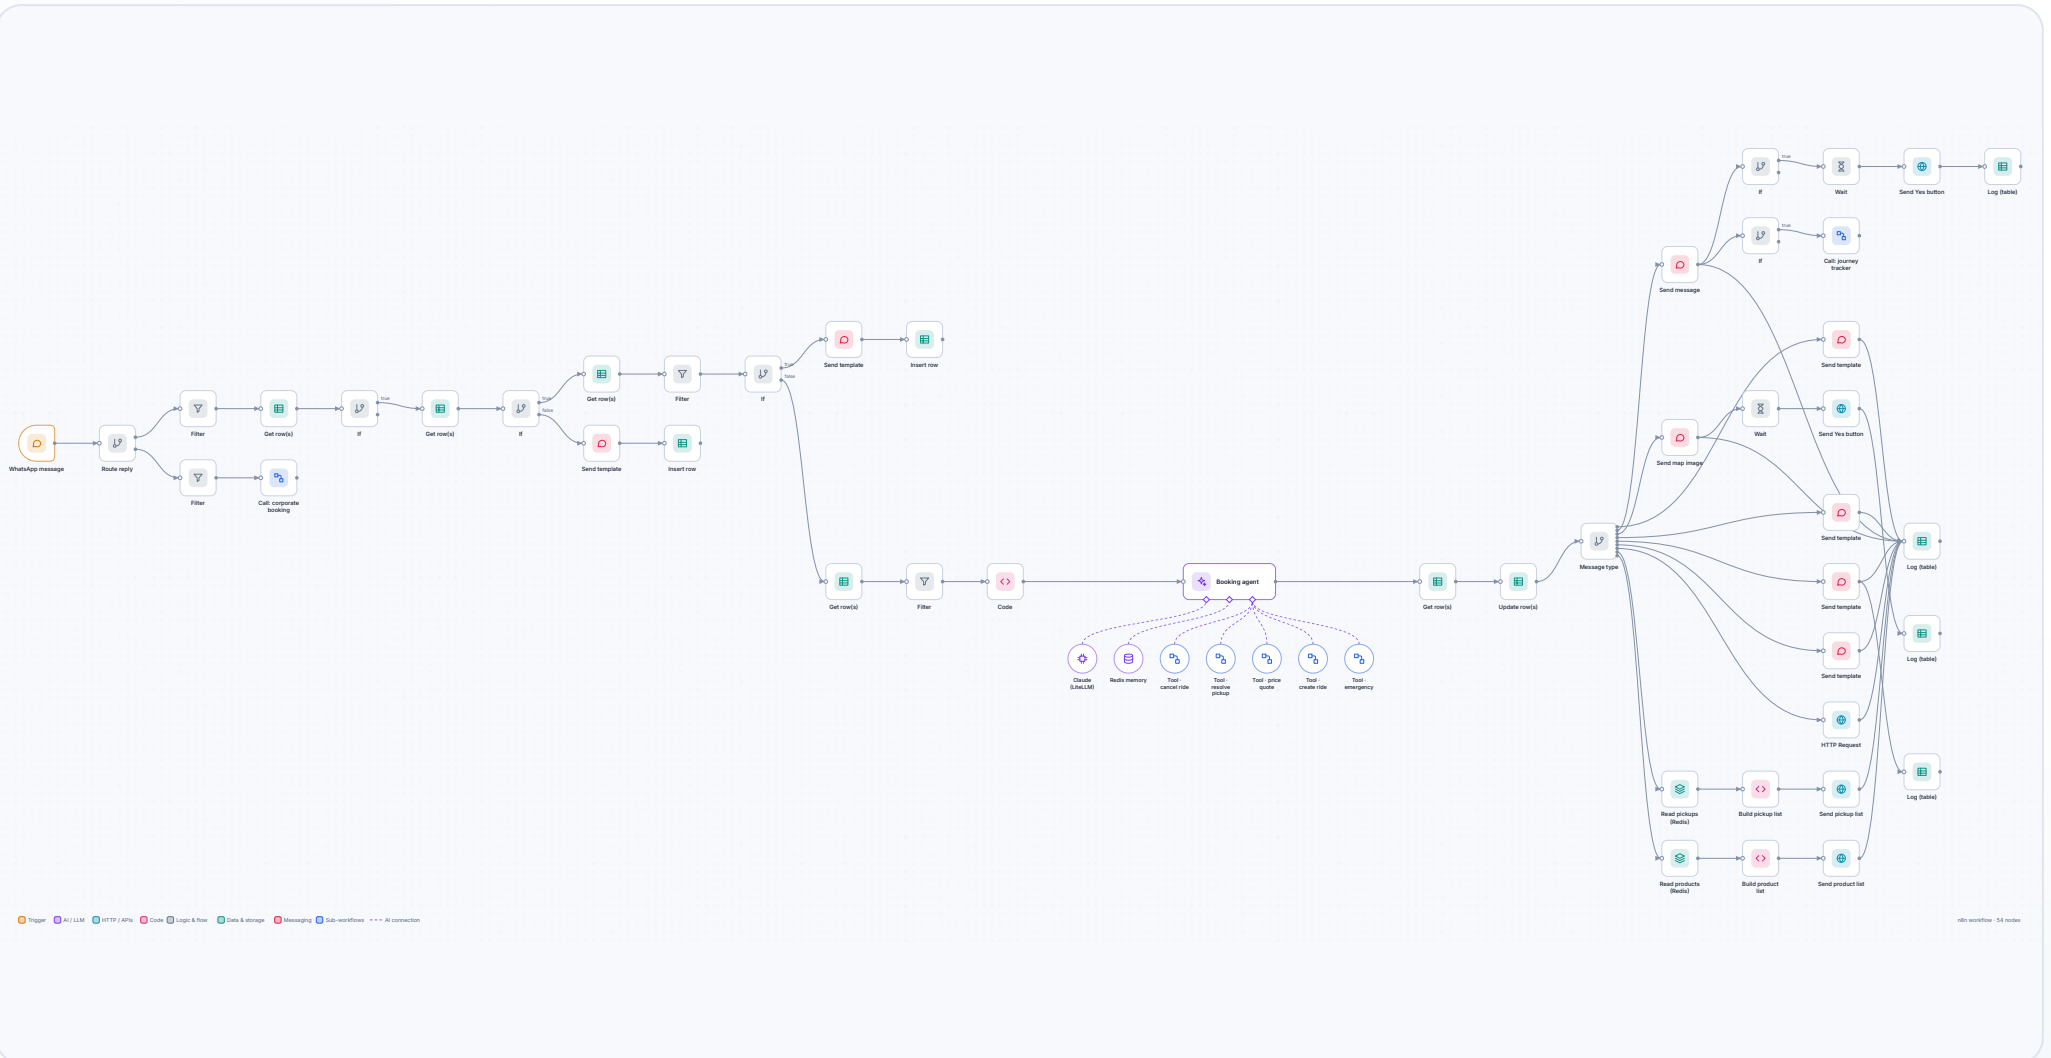


Tool • resolve pickup

15 nodes

active

Tool: resolve the pickup. Chooses reverse geocoding or a places search depending on what the rider sent, ranks the candidates, snaps to the nearest allowed pickup point and stores the result in the session.

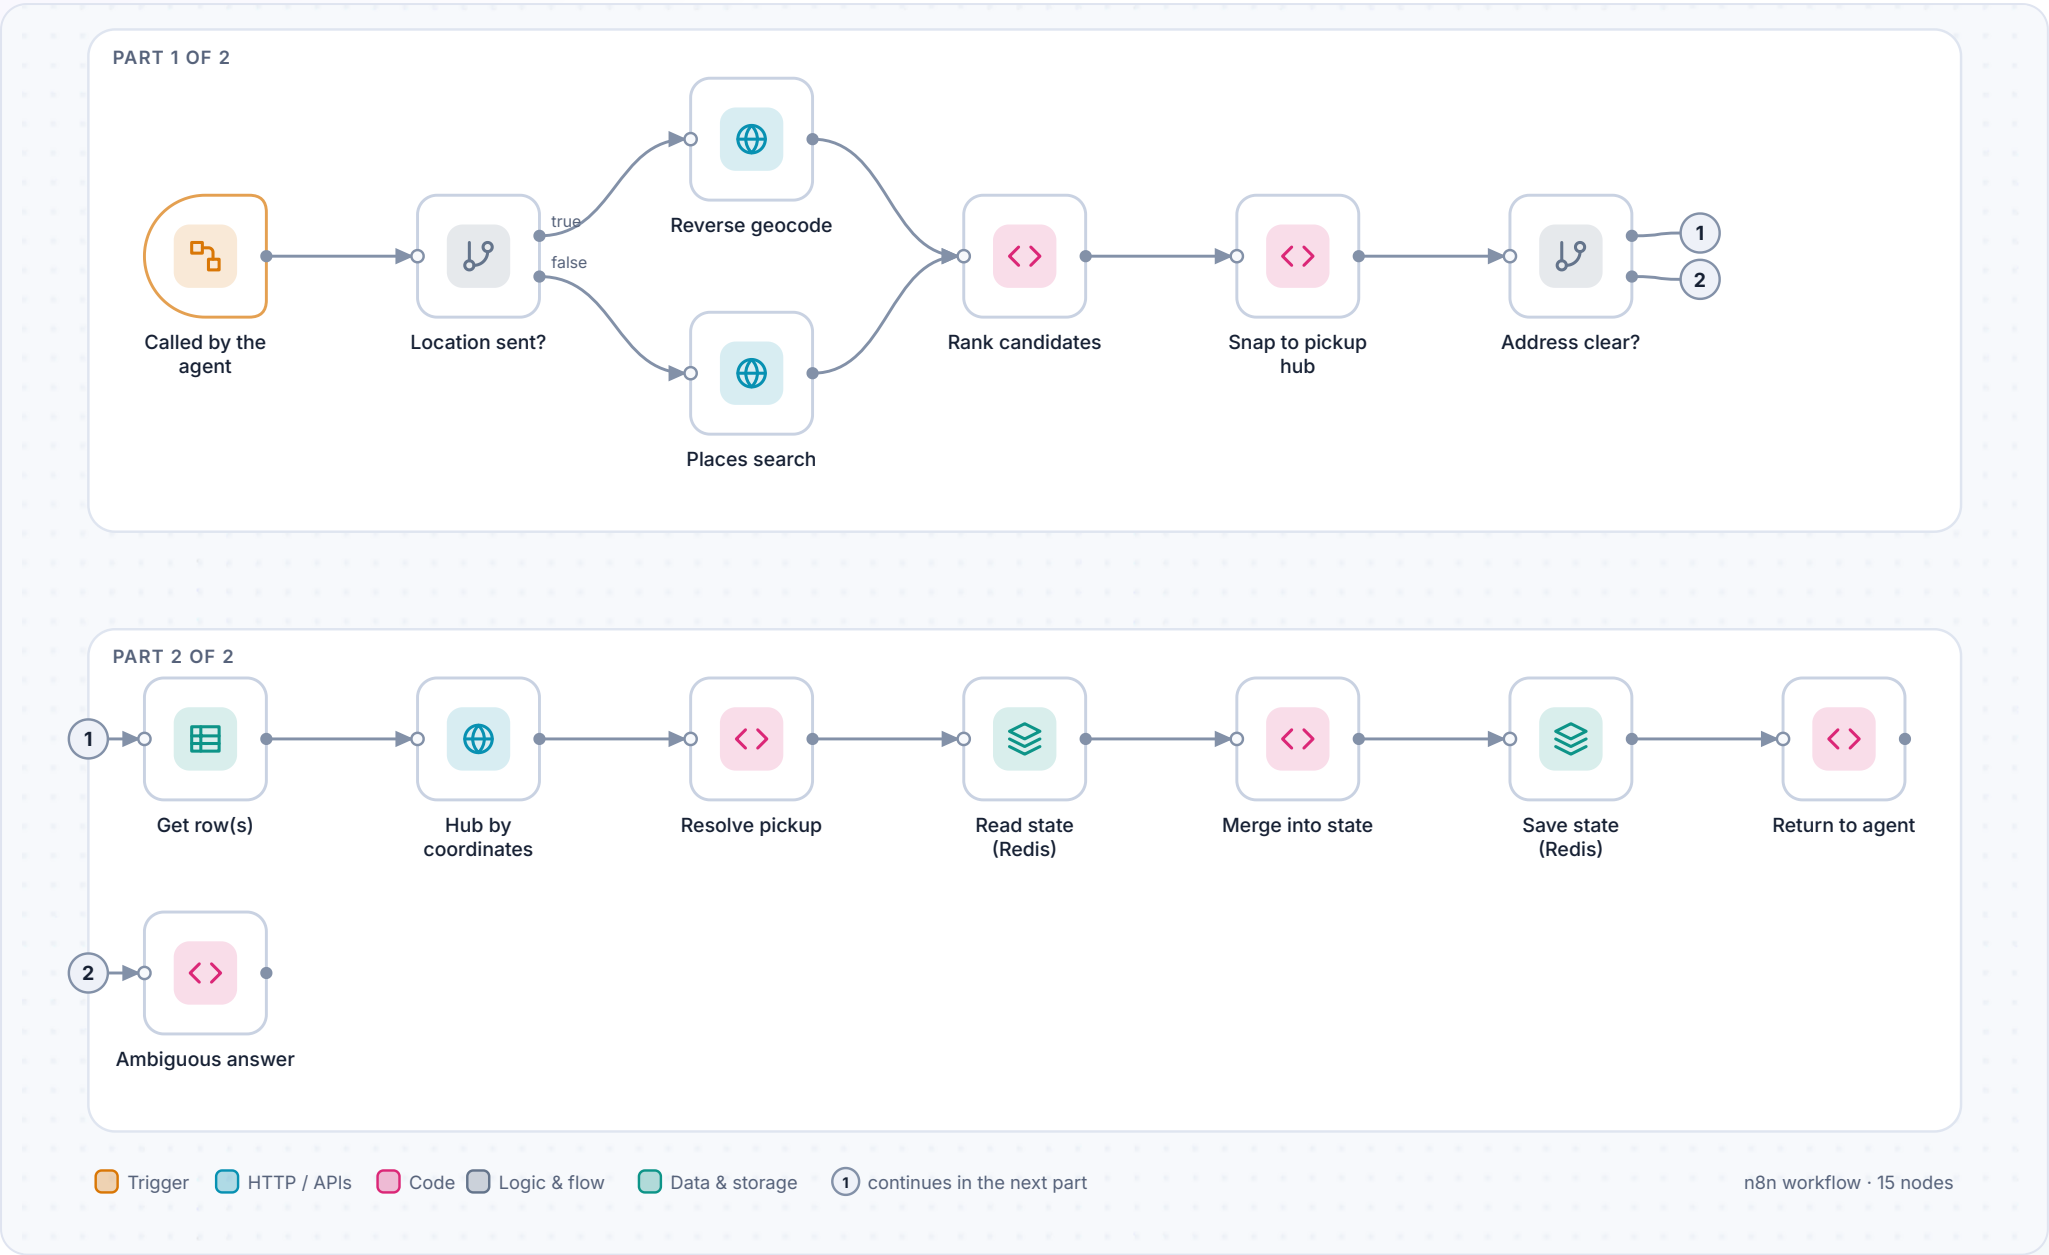


Tool • price quote

10 nodes


active

Tool: reads the trip from the session, asks the API for the products and prices available for that route and returns a short quote the agent can show.

PART 1 OF 2

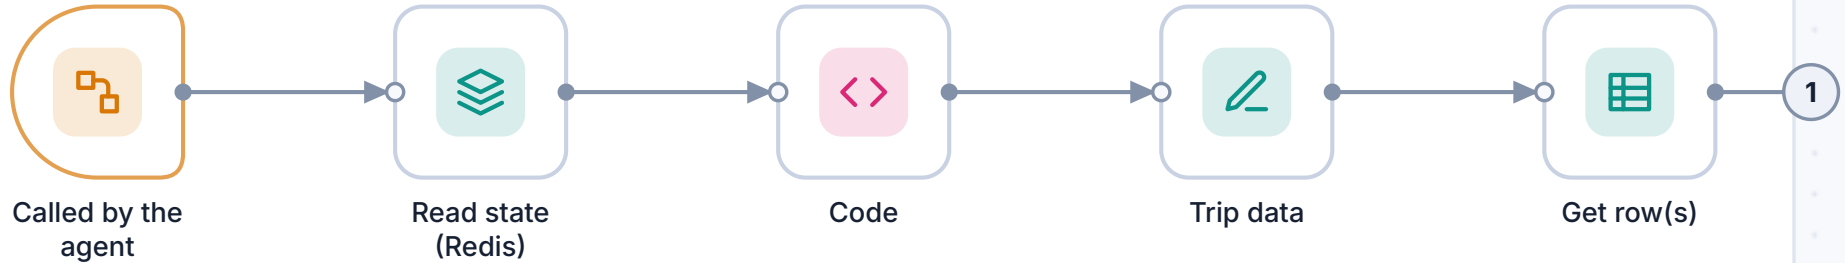

PART 2 OF 2

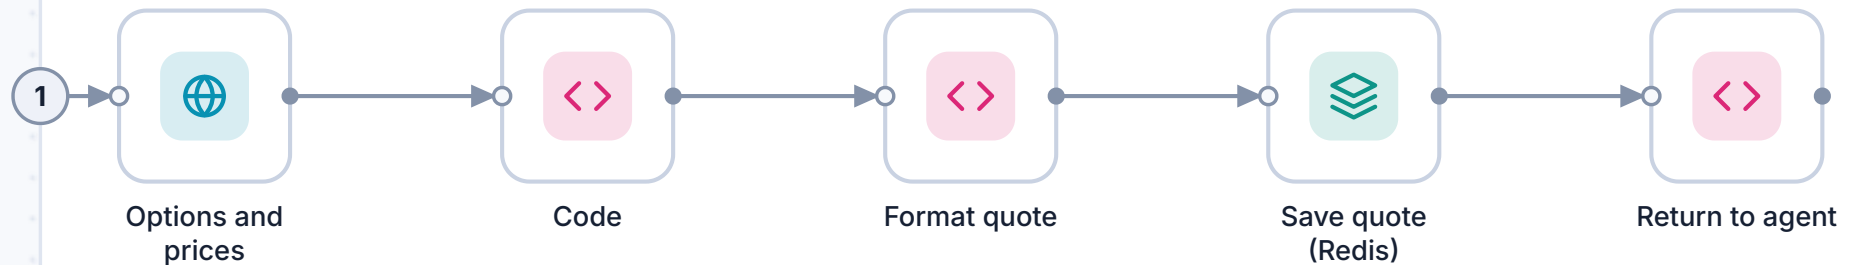


Trigger HTTP / APIs Code Data & storage 1 continues in the next part

n8n workflow · 10 nodes

Tool • create ride


11 nodes active

Tool: creates the ride through the API with the confirmed trip data, waits for the share link and returns it to the agent.

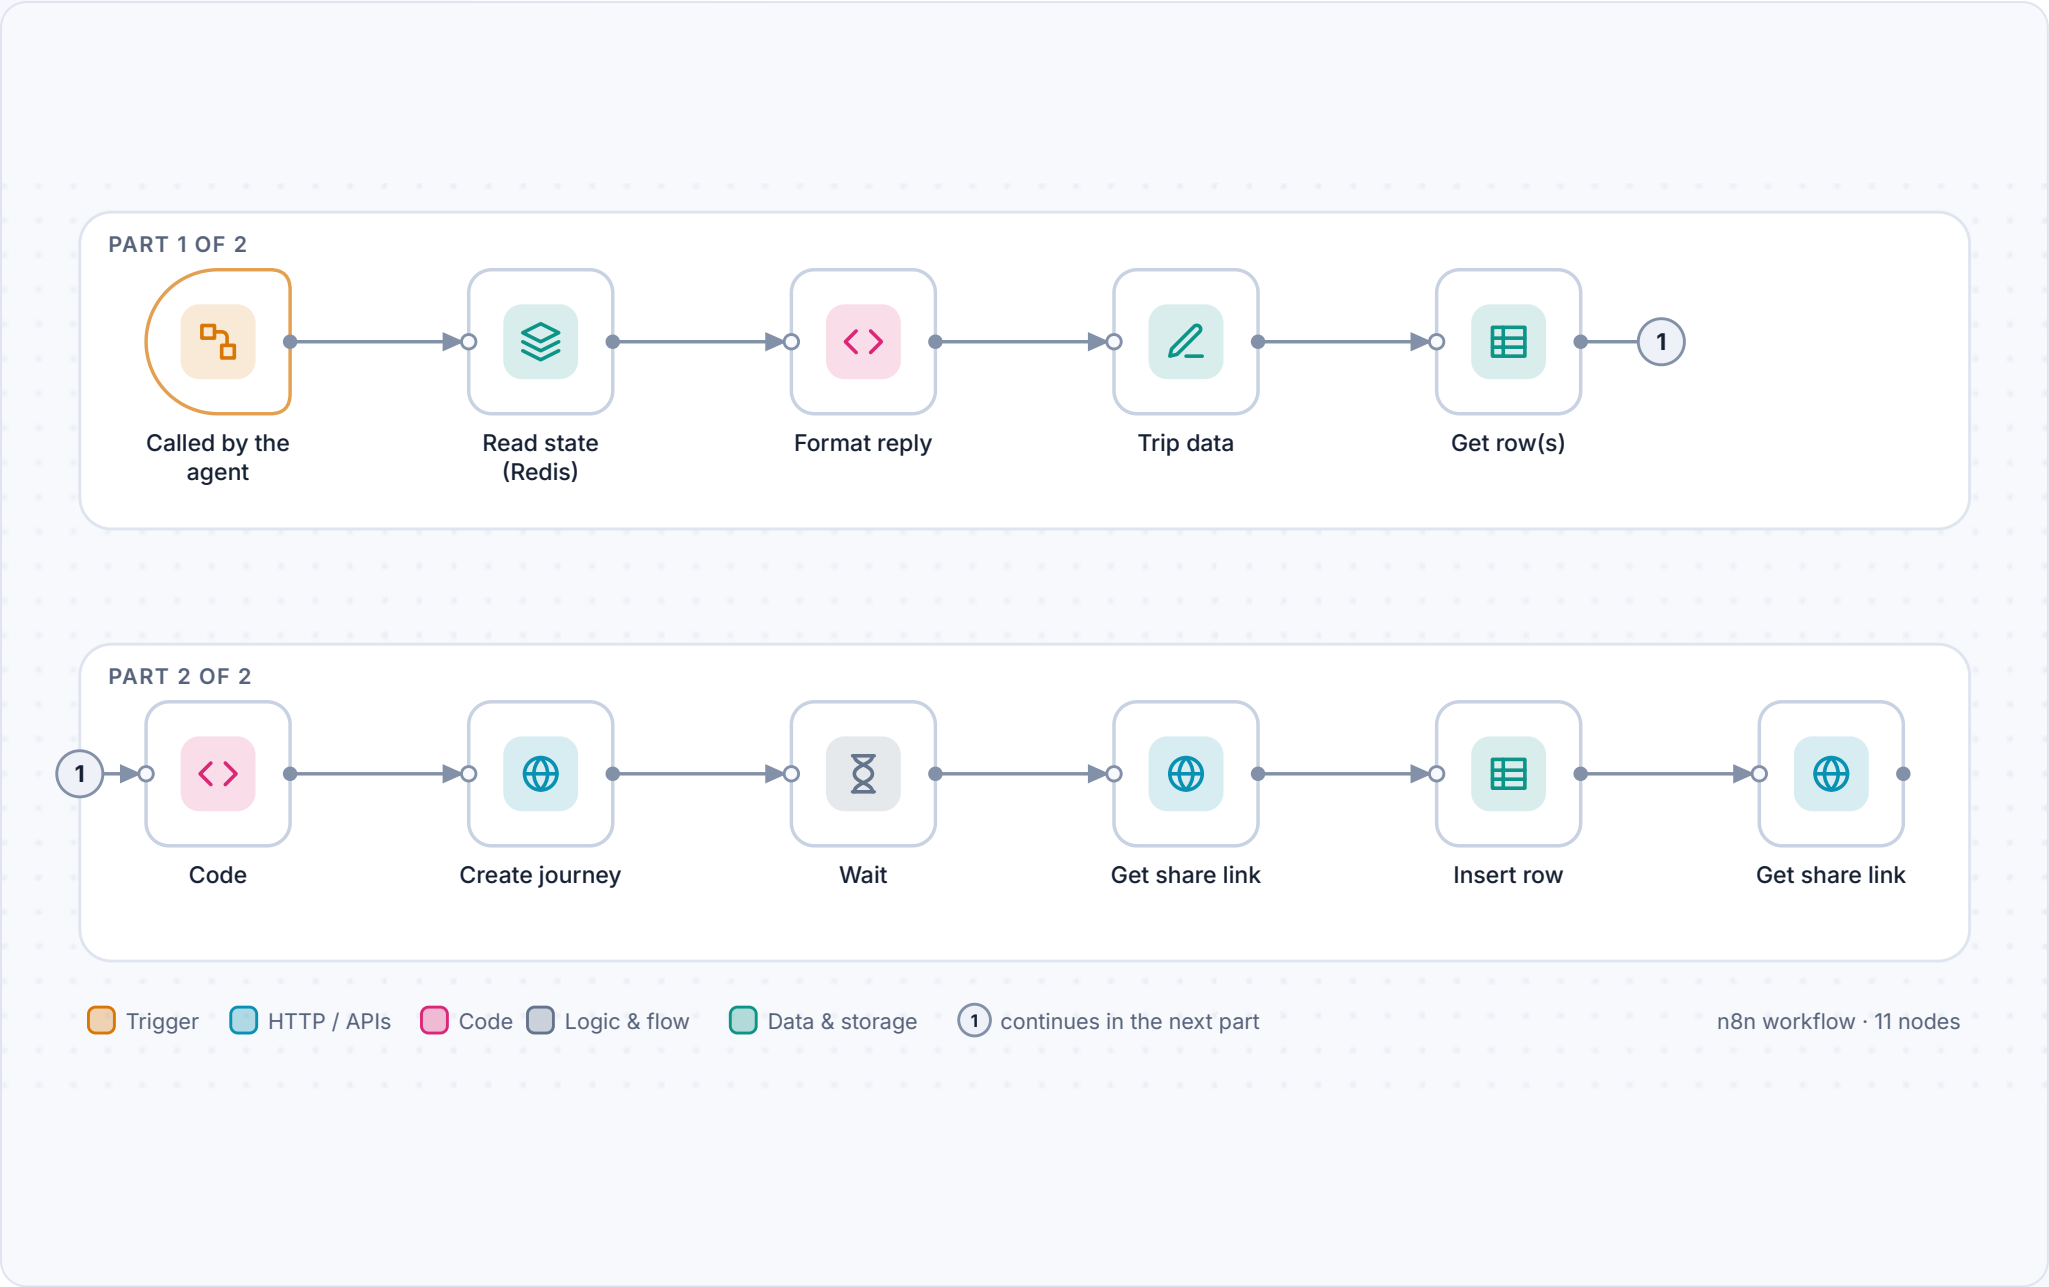


Tool • cancel ride 6 nodes active

Tool: cancels the ride. The free-cancellation window is computed in code, not by the model.

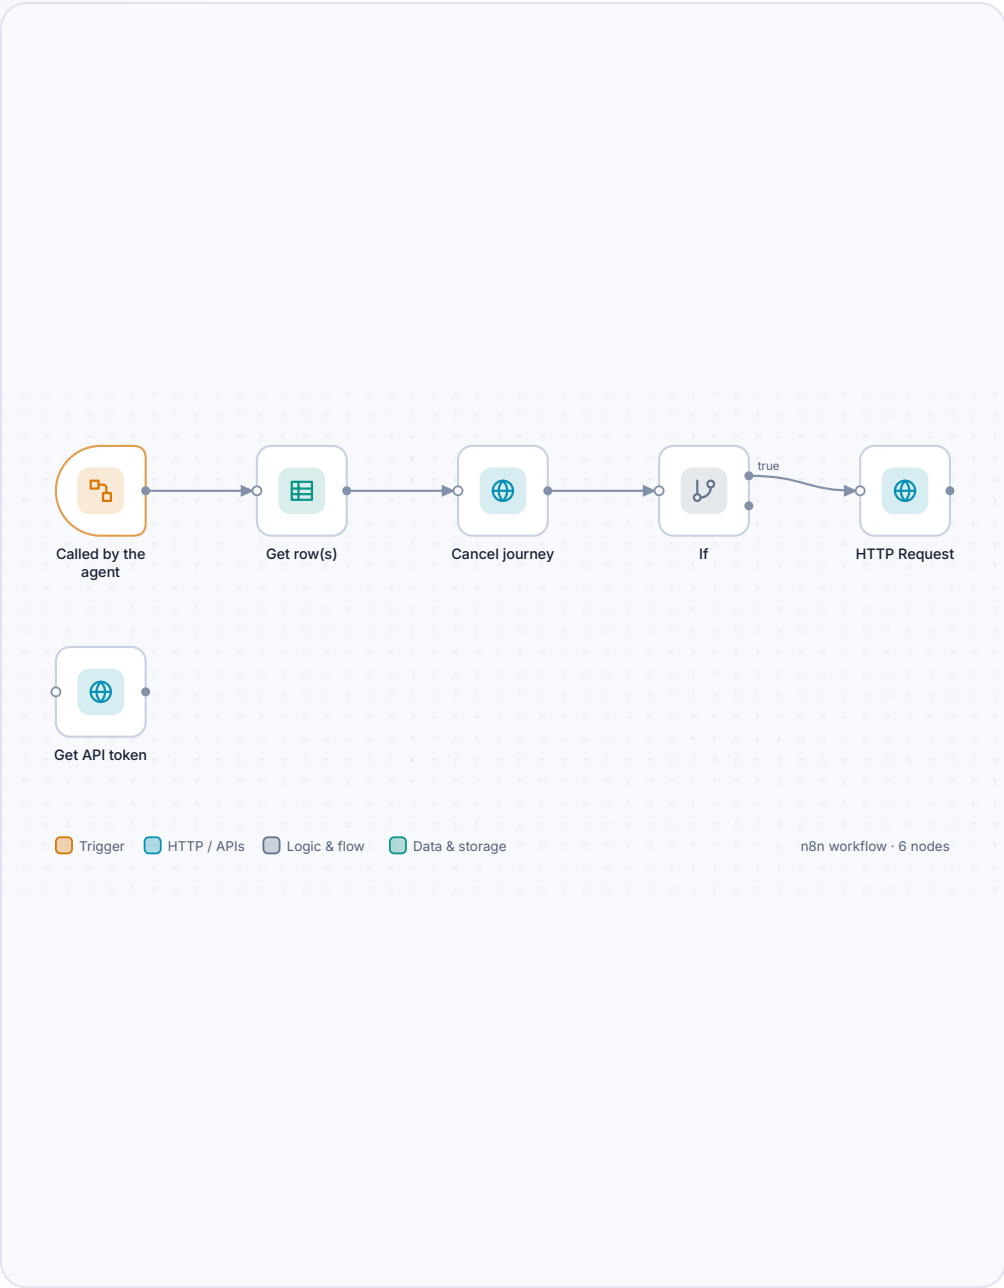

Tool • support ticket 6 nodes active

Opens a support ticket with the conversation attached.

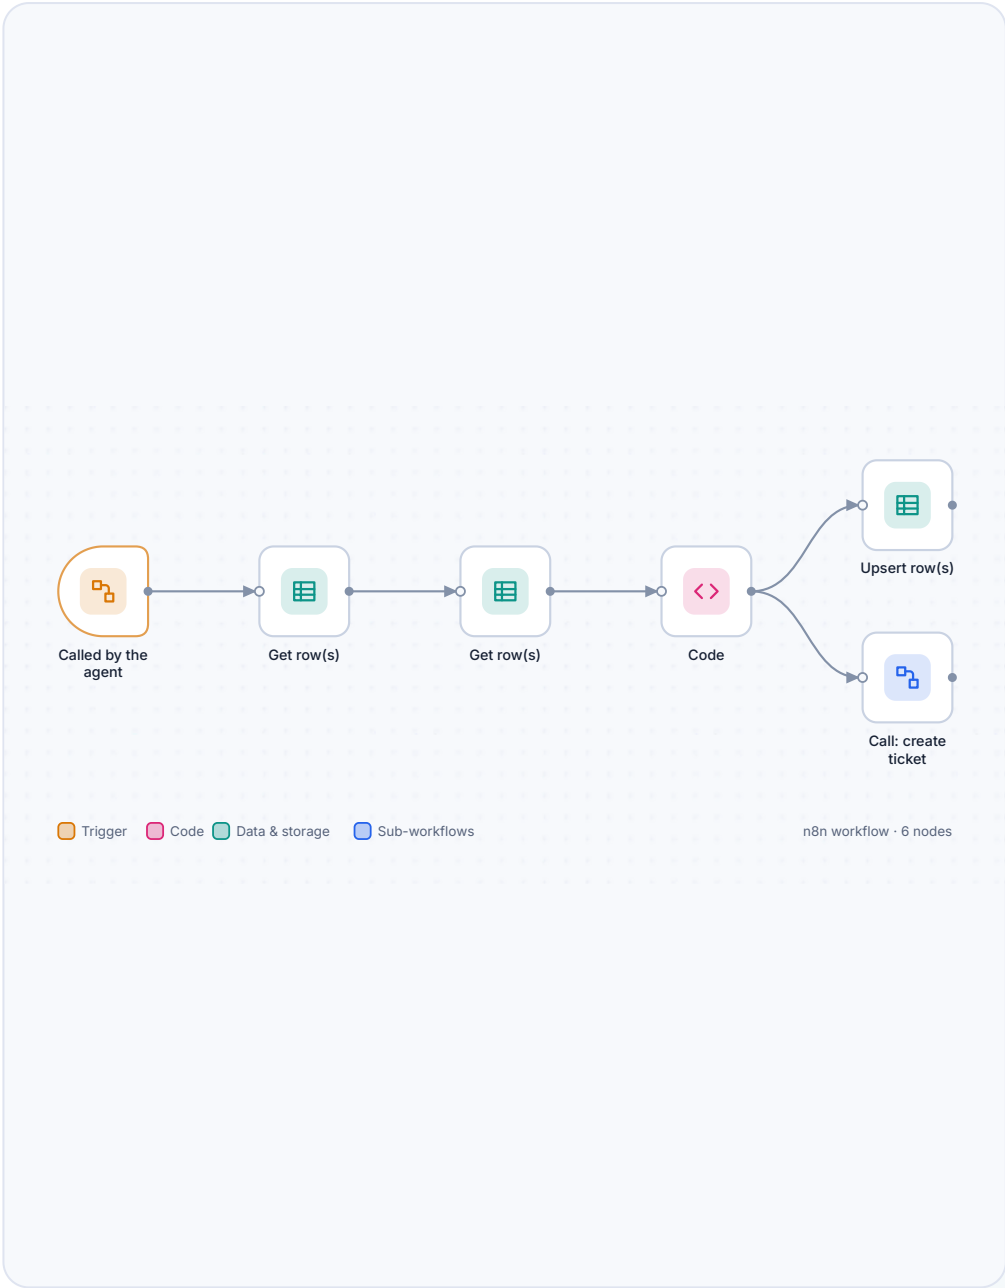


Journey tracker

52 nodes

active

Tracks the ride after booking: polls its status, sends a message at each milestone, asks the rider when something looks wrong and opens a support ticket when needed.

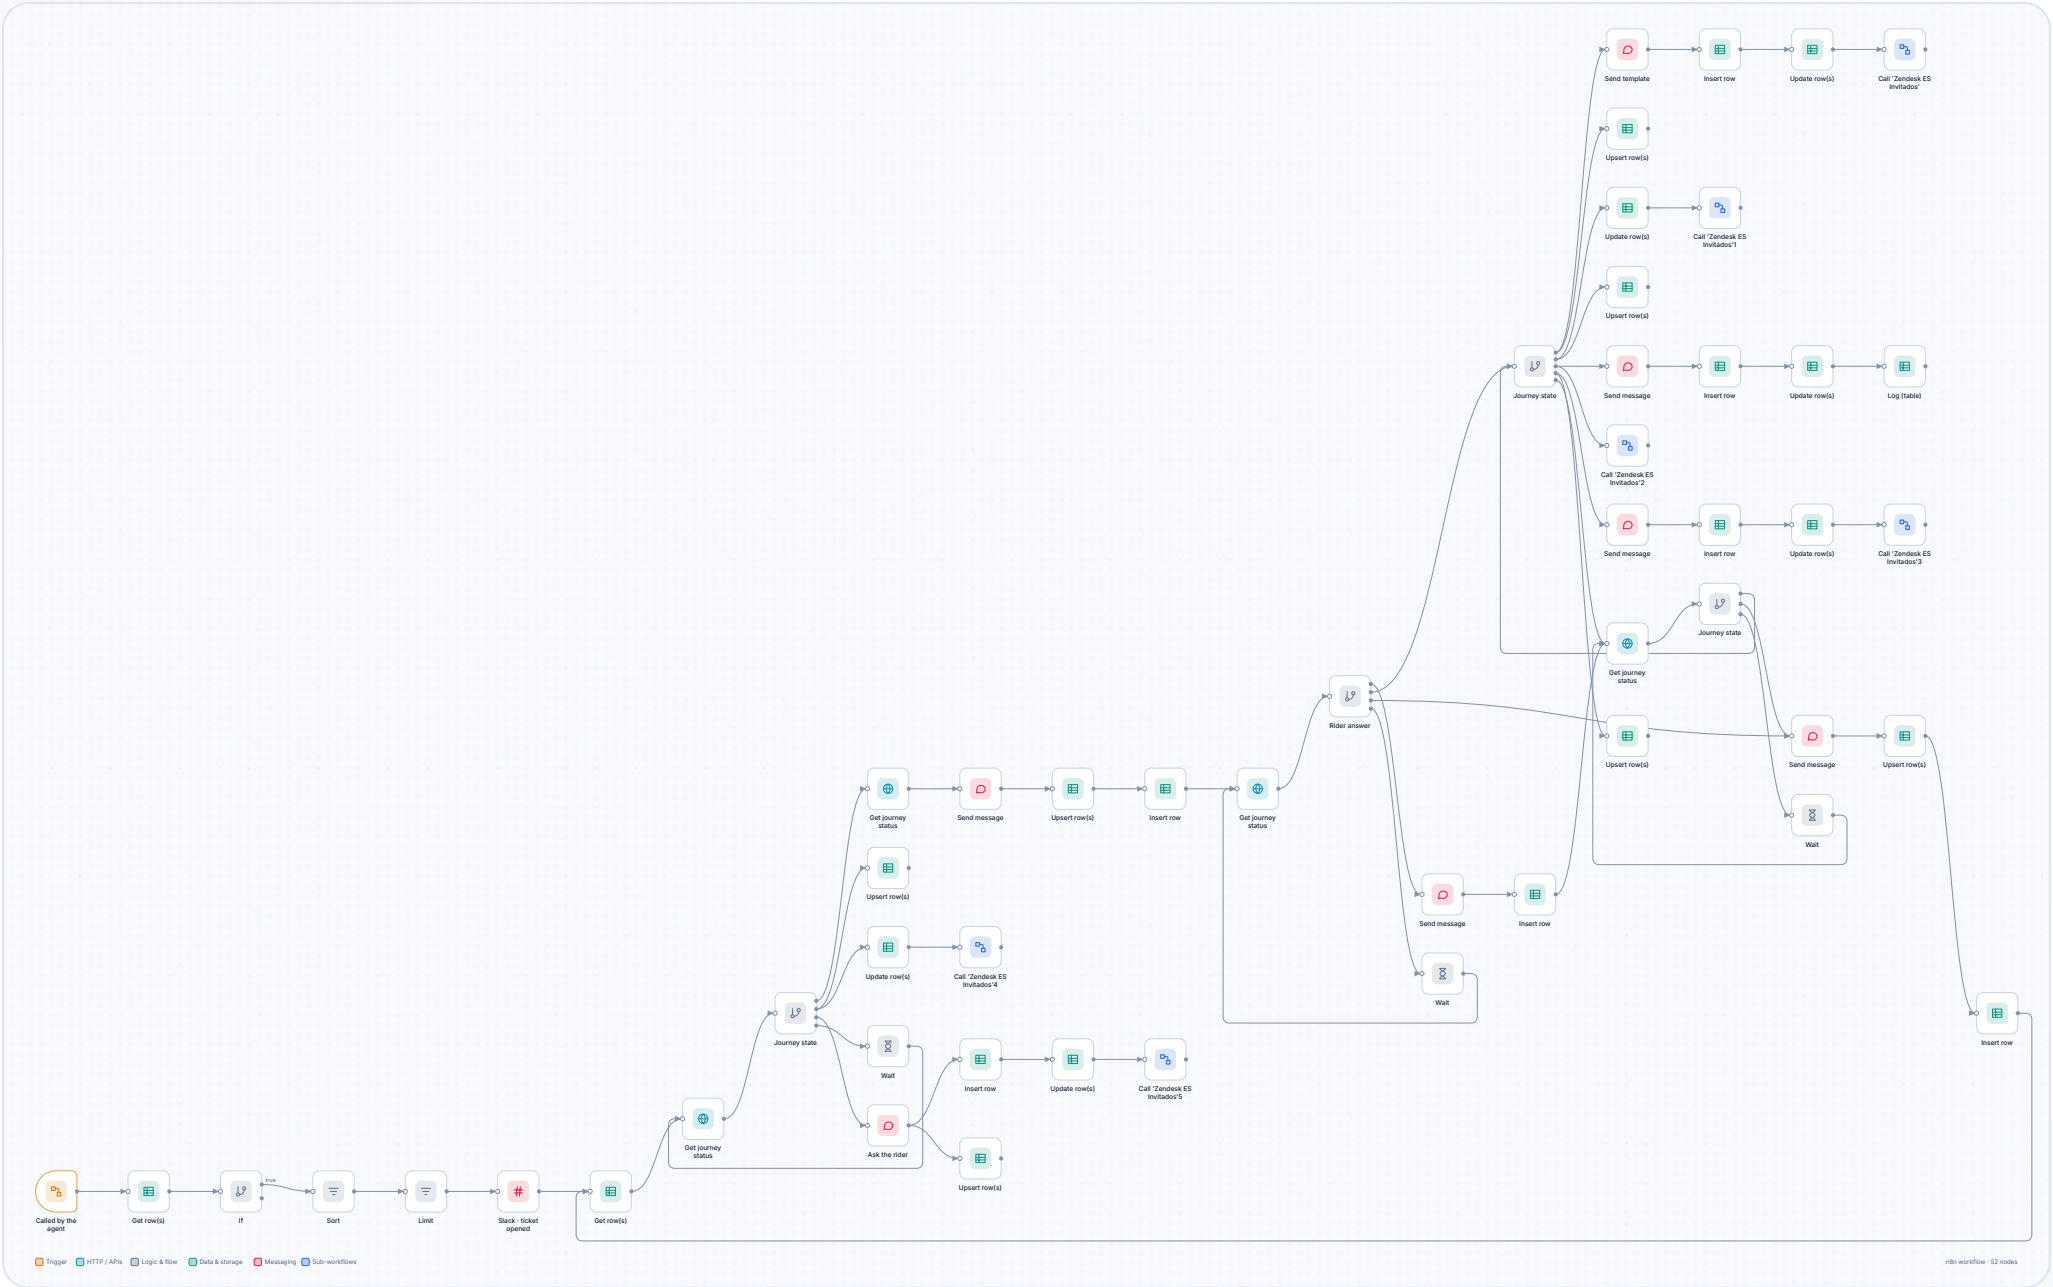


Invoice delivery

21 nodes

active

Reads the invoice email, extracts the PDF, finds the rider's conversation and sends the invoice on WhatsApp.

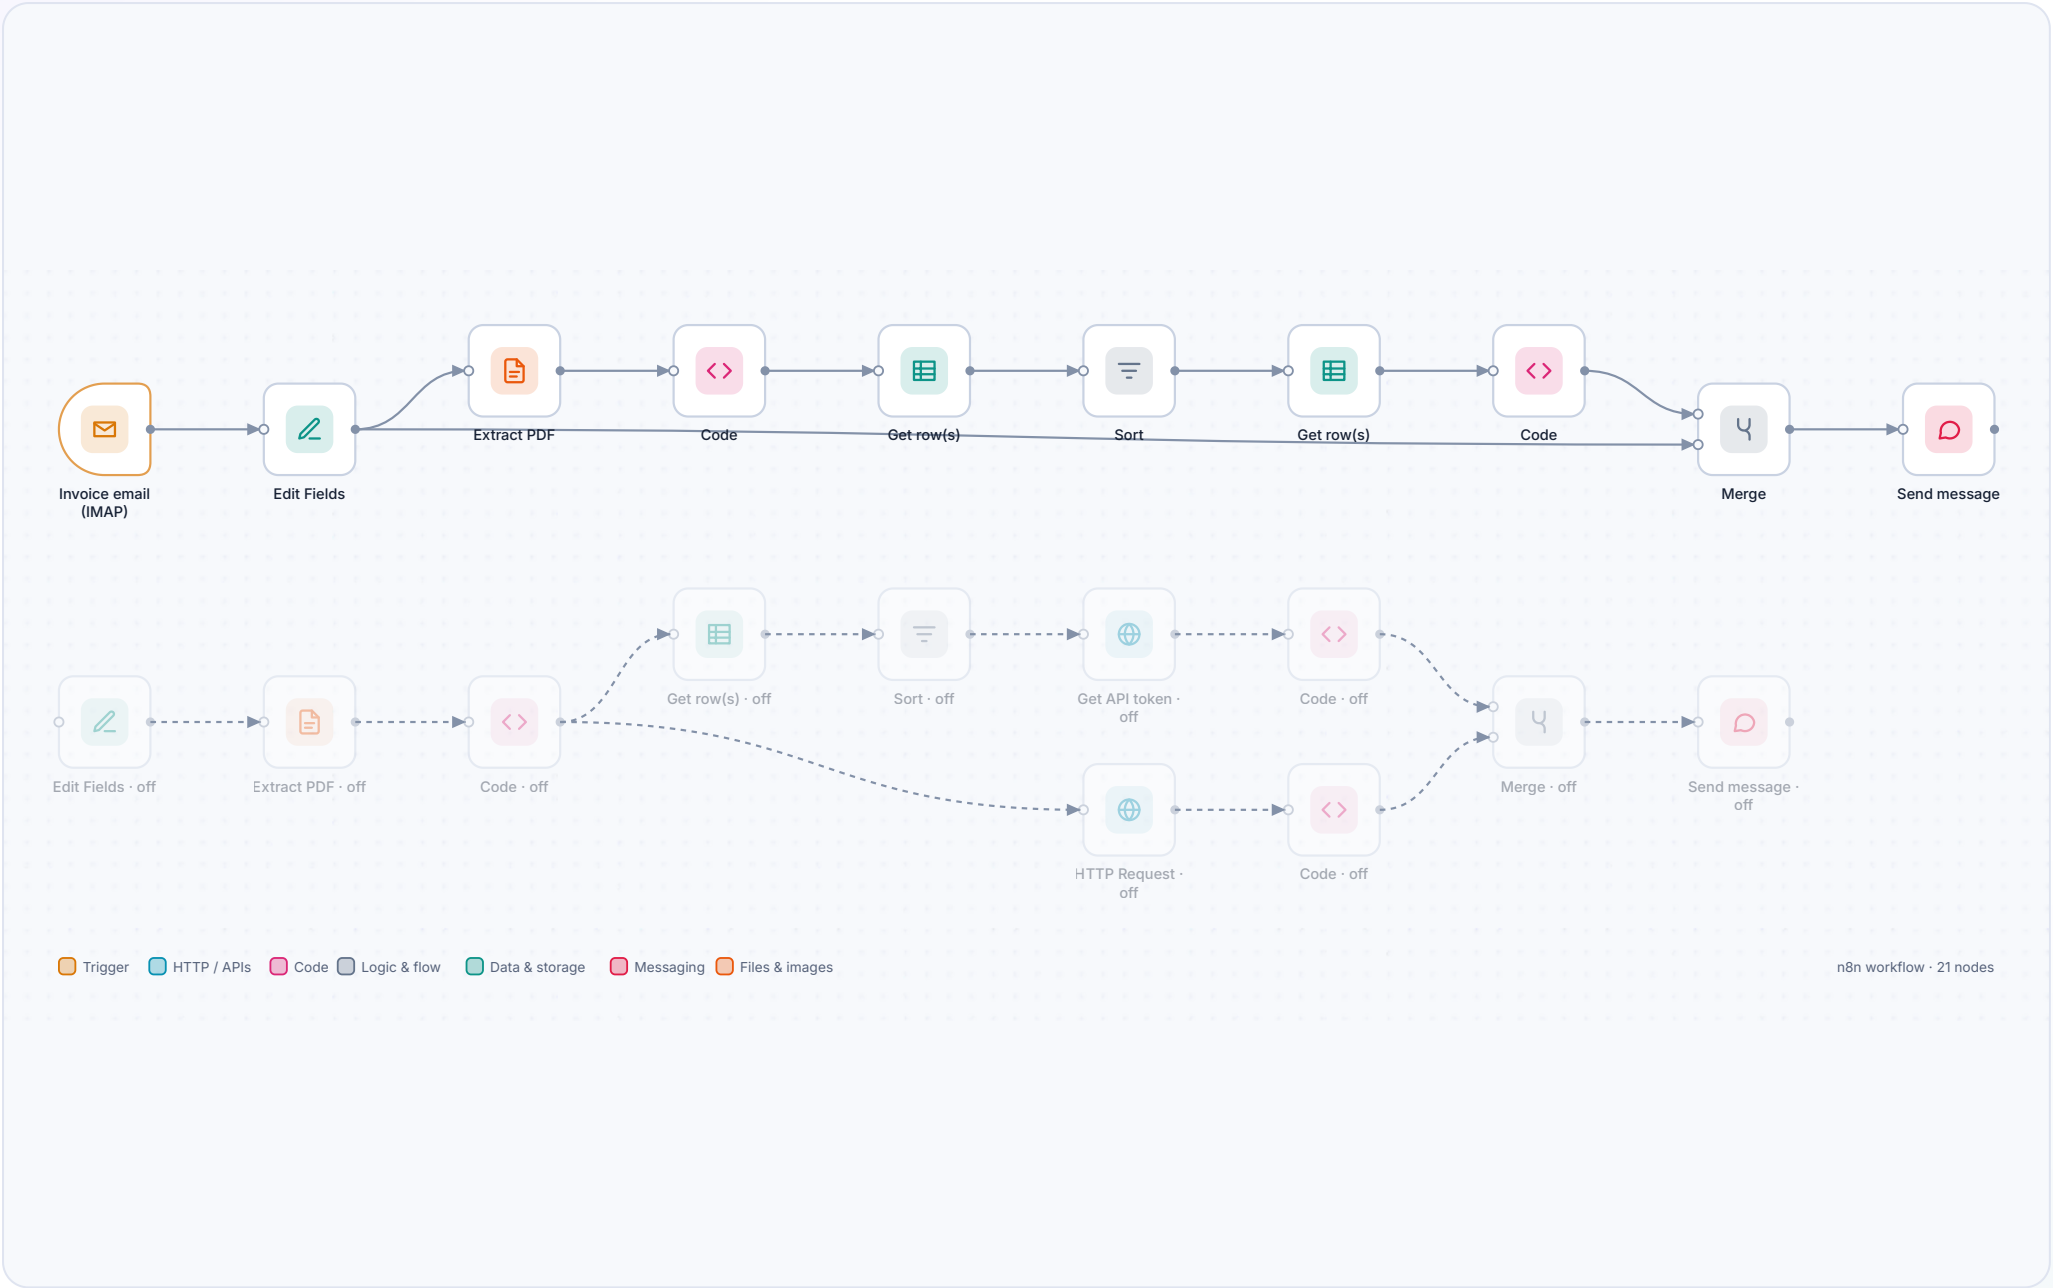


Static map

5 nodes

active

Returns a static map image of the pickup point for the WhatsApp message.

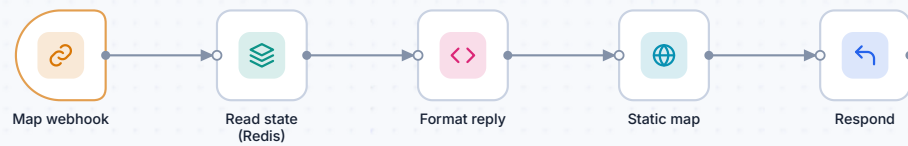

Trigger HTTP / APIs Code Data & storage Sub-workflows


n8n workflow · 5 nodes

API token refresh

3 nodes

active

Keeps the API token fresh on a schedule.

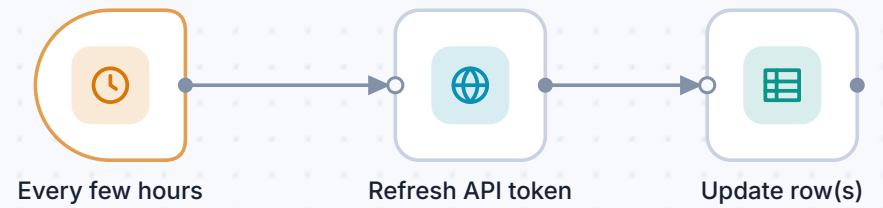

Trigger HTTP / APIs Data & storage n8n workflow · 3 nodes

SECTION

CabiBot • Help Center AI Agent

Case study: mathieutellene.github.io/work/cabibot.html


A chat agent in the rider Help Center for sign-in and account problems. It searches help articles, keeps memory per session and opens a support ticket when it cannot solve the problem.

CabiBot • Help Center agent

12 nodes

active

Chat trigger, the agent with its model, memory, article-search tool and ticket tool, then the reply is shaped and the session logged.

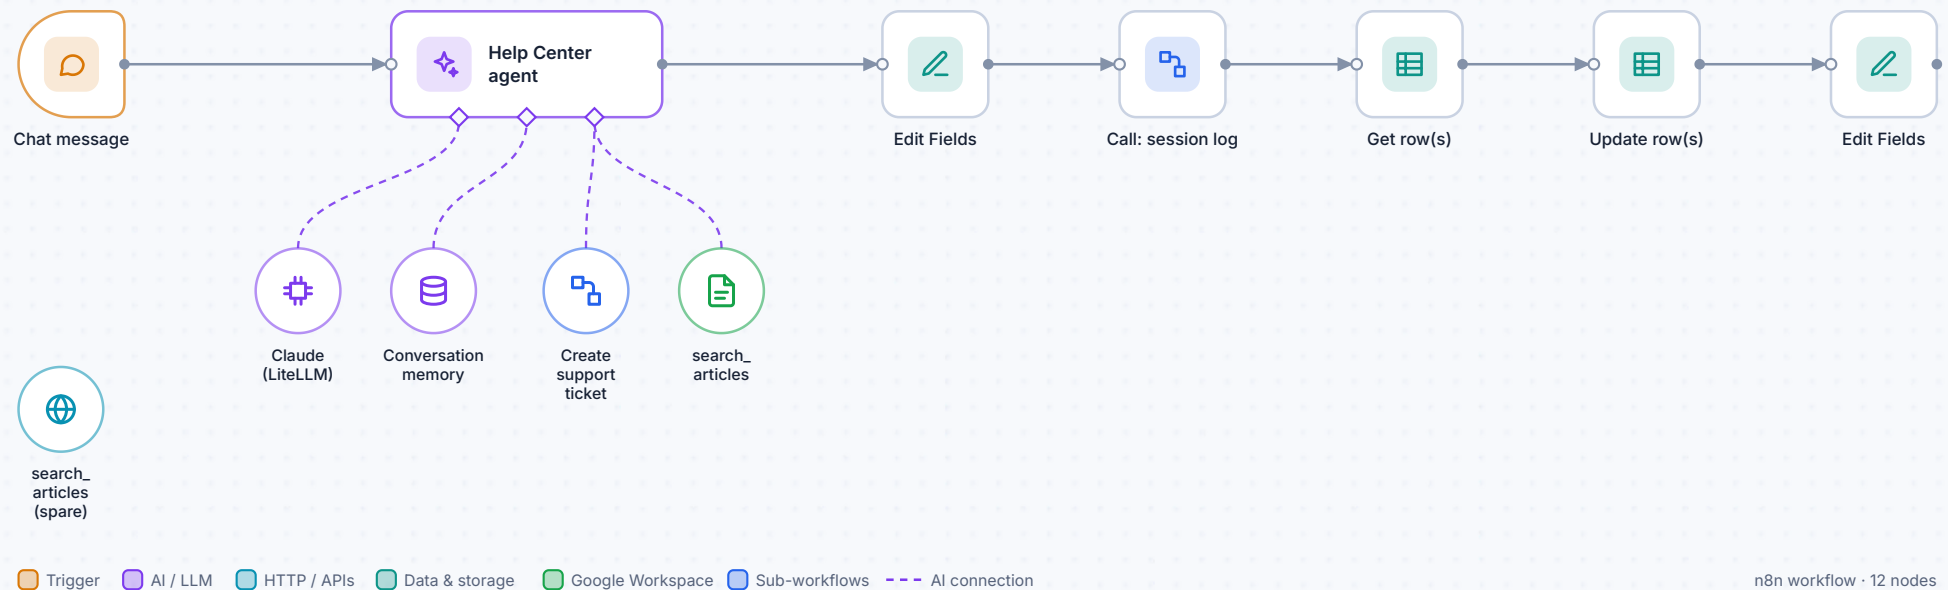

SECTION

Email-to-Reservation Pipeline (B2B)

Case study: mathieutellene.github.io/work/b2b.html


Two corporate clients book by email. AI agents read every spreadsheet, work order and loose email, the sheets validate each trip, and rides are now created, changed and cancelled automatically through the public API with the driver attached. People handle the exceptions.

Client A • request and work-order agents

27 nodes

active

Two Drive watchers, one for request spreadsheets and one for signed work orders, skip anything already processed and hand each file to its agent. The tools can only find rows, upsert values, set the driver and notify Slack; formula columns and ride fields are out of their reach. If an agent fails, Slack hears about it.

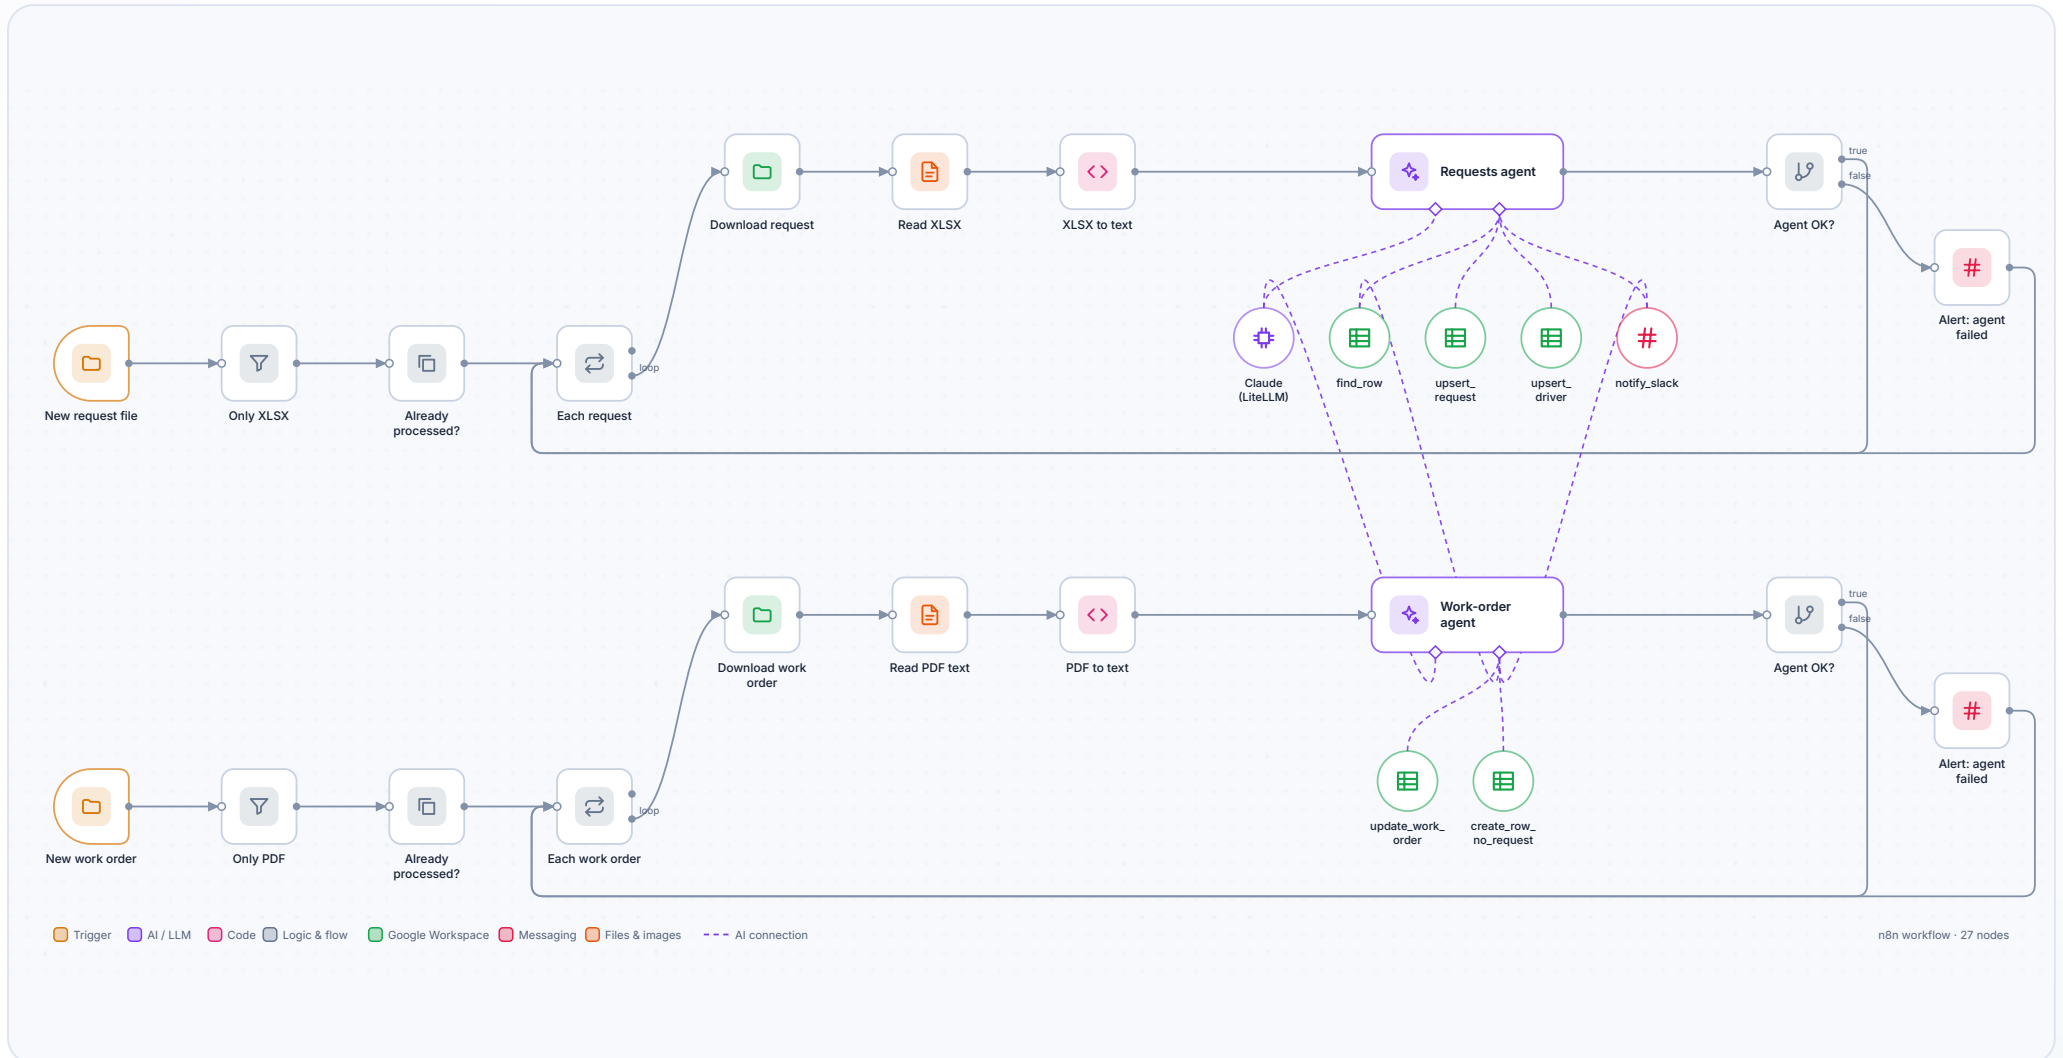


Client B • email agent

50 nodes

active

Reads the client's mailbox, cleans each email and skips the ones already handled. The daily schedule (an Excel file) is compared with the sheet in code, after waiting until the sheet has loaded that day. Loose emails and notes in the Excel go to a model with the trips of the next seven days and the full passenger profile; it returns structured actions, code validates them, and a switch cancels, modifies, adds or sends to review. Every request ends in the log and one Slack message.

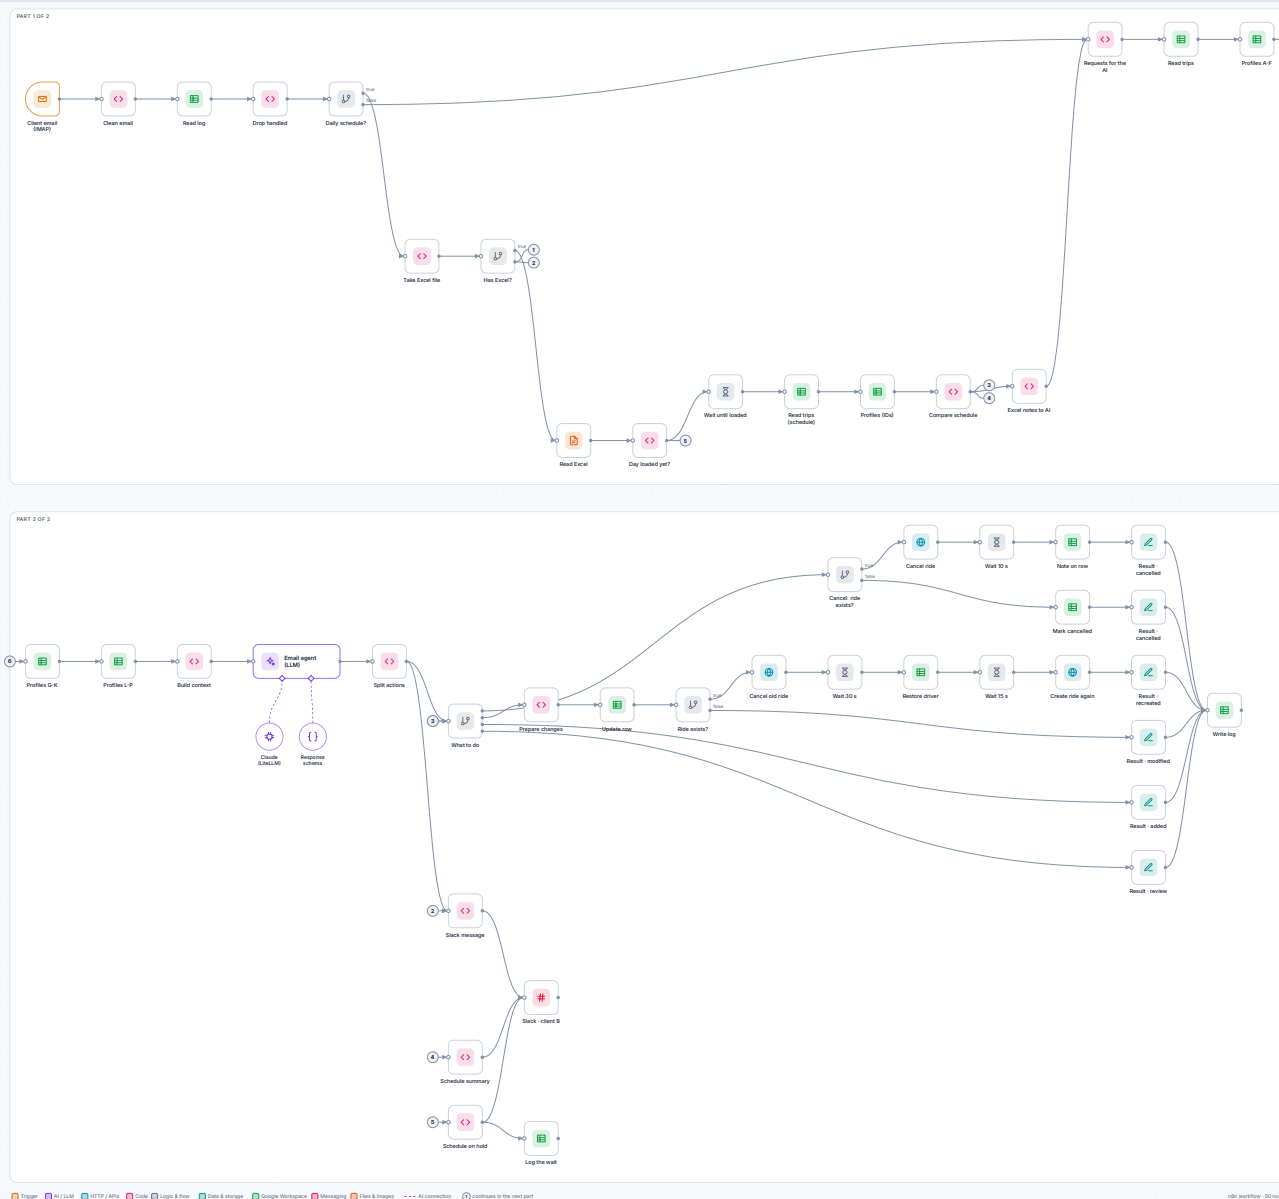


Multi-client ride engine

40 nodes

active

One webhook per client, credentials and settings from a data table, the row read by its key, then create or cancel. Creating geocodes both addresses, estimates the price, picks the product and creates the ride with the driver attached in one call; the result is verified and written back to that client's sheet. Every failure goes to one error collector that posts to Slack and answers 422.

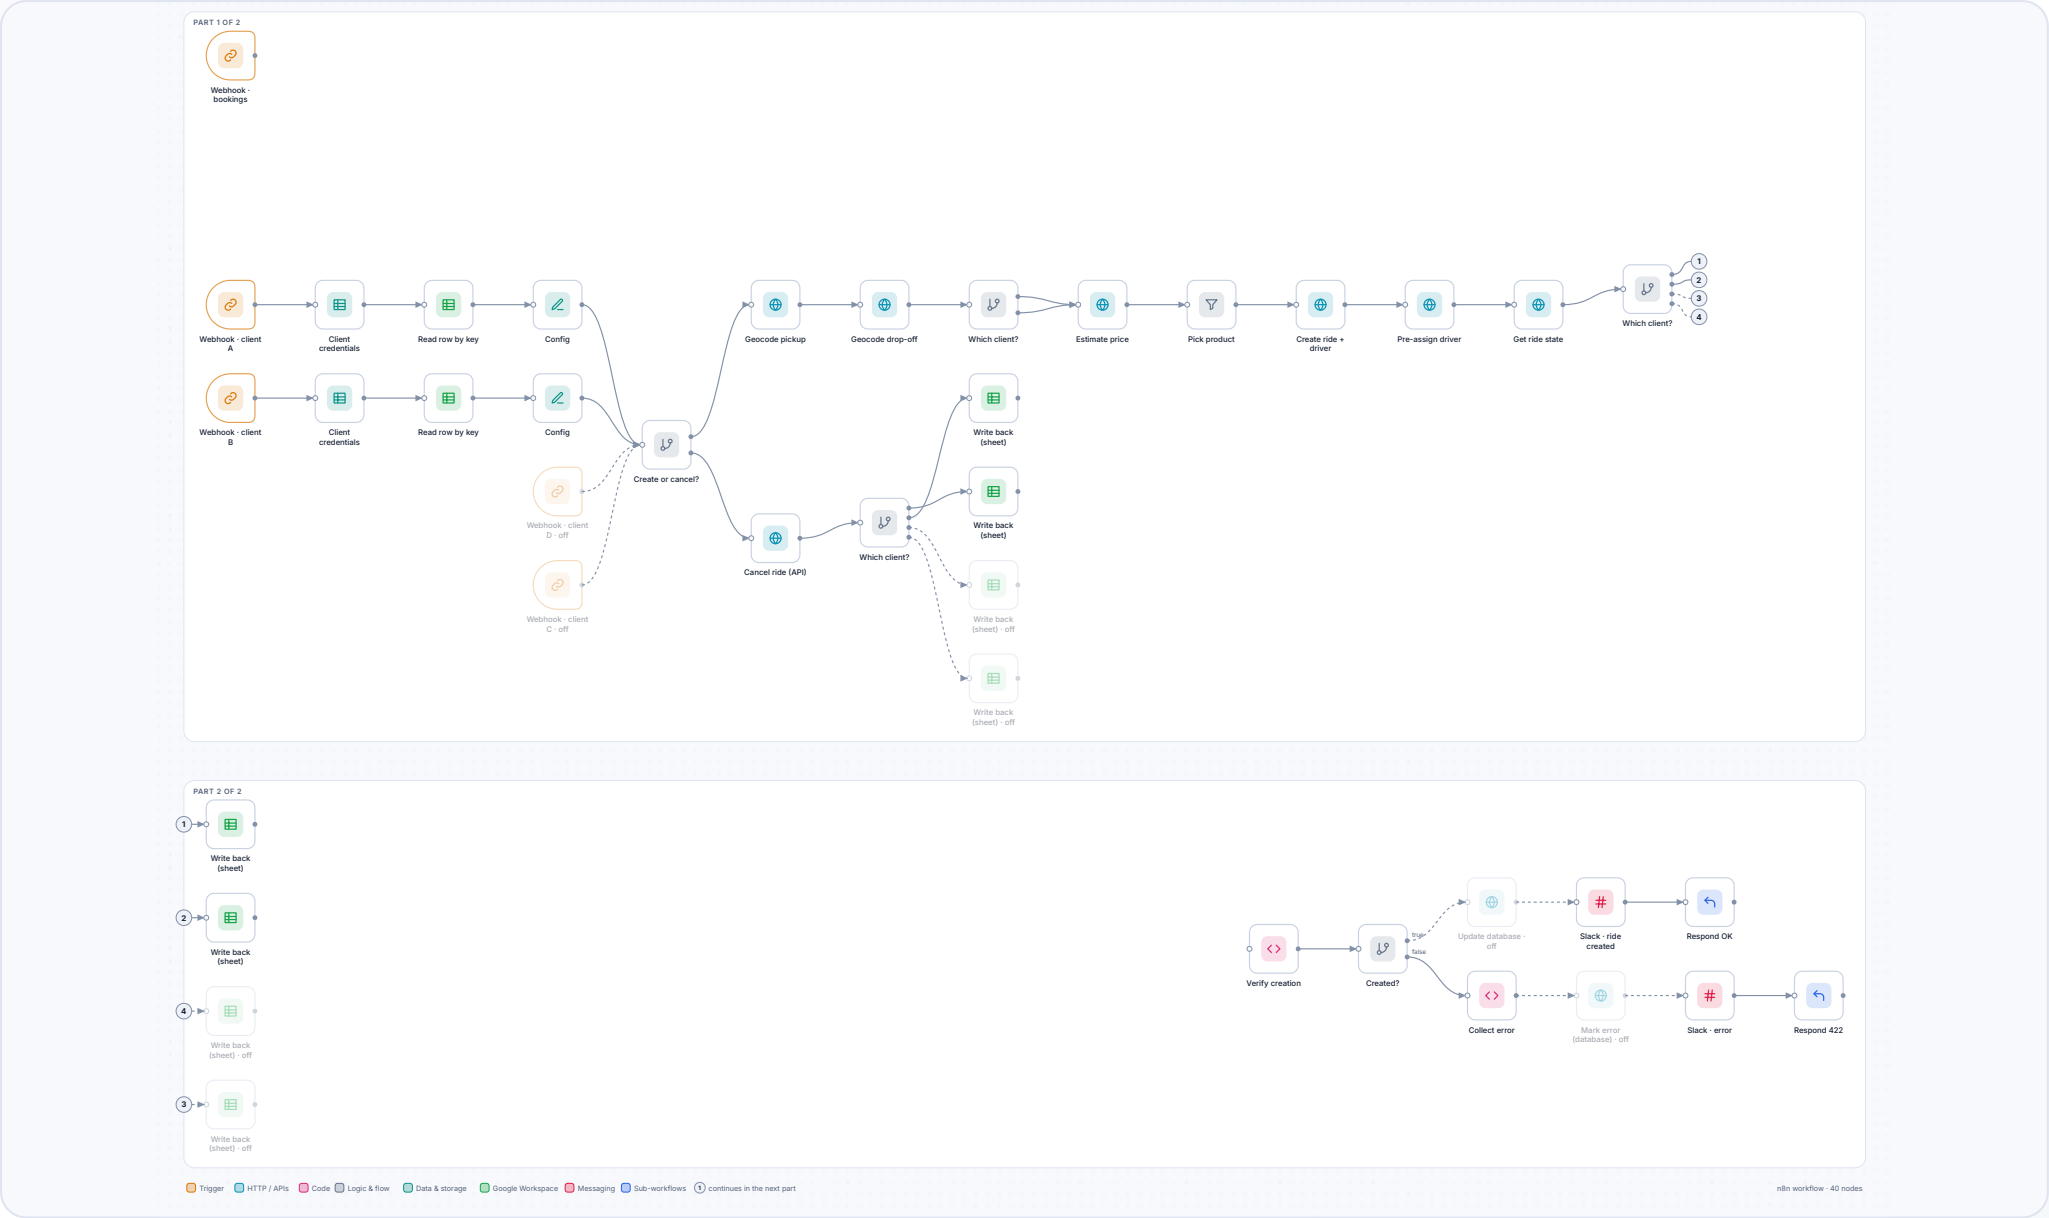


Client A • email intake

3 nodes

active

Saves the client's request attachments from the mailbox to Drive, where the agents pick them up.

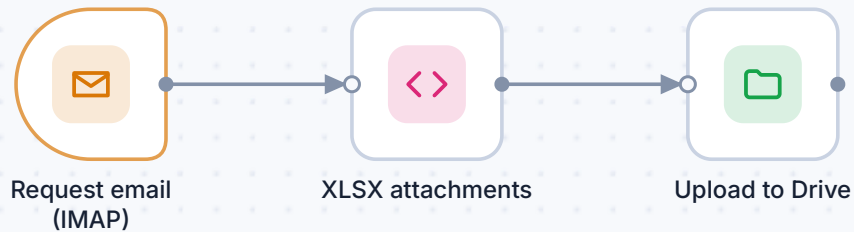

Trigger Code Google Workspace


n8n workflow · 3 nodes

API token refresh (per client)

5 nodes

active

Loops over every client in the data table and refreshes its API token on a schedule, so no webhook ever runs with an expired one.

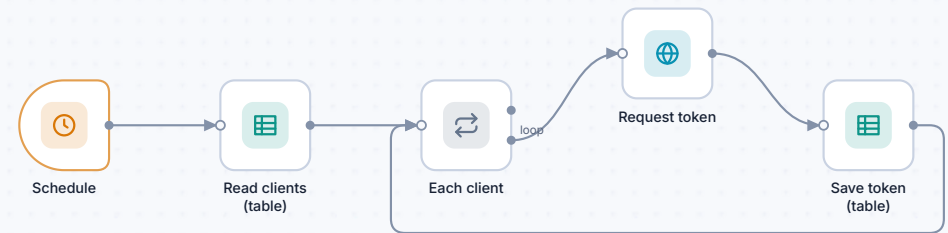

Trigger HTTP / APIs Logic & flow Data & storage

n8n workflow · 5 nodes

COPs Control · n8n version

The KPI extraction that started COPs Control: dashboards read by a vision model, every week. The daily engine now runs as a Python and PostgreSQL pipeline on the team's Mac mini that reads the data itself.

108 nodes

active

The diagram illustrates a complex Airflow DAG (Directed Acyclic Graph) for a data pipeline. It starts with a 'Weekly schedule' trigger, which leads to a 'Read master shard' task. This task then branches into multiple parallel paths, each representing a different data source or processing stage. The paths include tasks like 'Config', 'Sign in', 'View image', 'Label', 'Cluster', 'Pattern', 'Map to weekly', and 'Write'. The tasks are color-coded and labeled with their respective data sources: rider, supply, driver, board, funnel, rider shard, rider source, and wrapped cars. The diagram also includes a legend for various Airflow operators and a footer with the text 'airbnb.com'.

SECTION

Ops orchestrator (prototype)

A prototype, not in production: one agent reachable from Slack, chat, email, a schedule and a webhook, with tools for files, email, calendar, the BI tool and tasks.

Ops orchestrator (prototype)

27 nodes

prototype

Every input is normalised to one shape, a classifier decides the intent, the agent acts with its tools and the reply is routed back to where the request came from.

