
Cucumber PDF Report

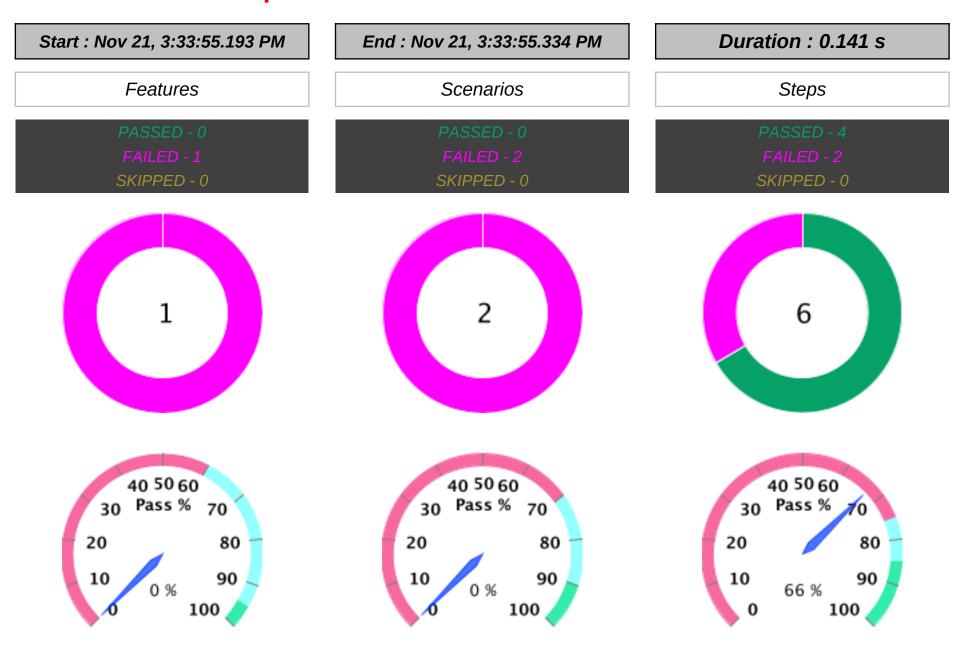


Feature		Scenario					Step			
Name	Duration	<i>T</i>	P	F	S	<i>T</i>	P	F	S	
Class2Module	0.141 s	2	0	2	0	6	4	2	0	

FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name
1	<u>Class2Module</u>	Check if admin able to retrieve class recording with valid Batchid
2		Check if admin able to retrieve all class recording


TAG	Scenario			Feature				
Name	<i>T</i>	P	F	S	T	P	F	S
@GetClassRecordingsbyBatchId	1	0	1	0	1	0	1	0
@GetAllRecordings	1	0	1	0	1	0	1	0

FEATURES SUMMARY -- 5 --

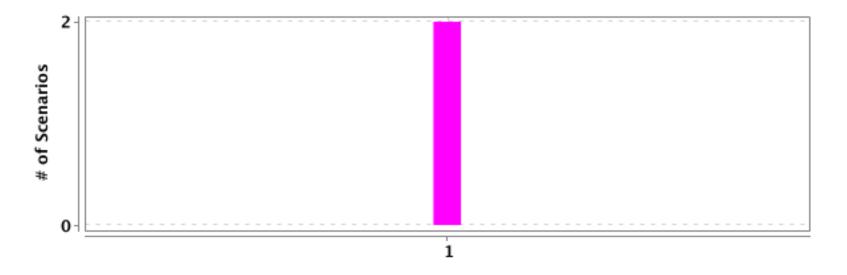

#	Feature Name	T	P	F	S	Duration
1	<u>Class2Module</u>	2	0	2	0	0.141 s

SCENARIOS SUMMARY

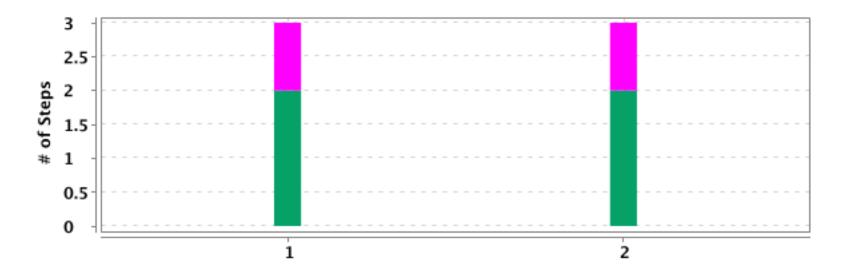


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Class2Module	Check if admin able to retrieve class recording with valid Batchid	3	2	1	0	0.011 s
2		Check if admin able to retrieve all class recording	3	2	1	0	0.121 s

DETAILED SECTION -- 7 --

Class2Module

FAILED	DURATION - 0.141 s	Scenarios		Steps	
		Total - 2		Total - 6	
/ 3:33:55.193 PM // 3	:33:55.334 PM /	Pass - 0	2	Pass - 4	6
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 0	


Check if admin able to retrieve class recording with valid Batchid

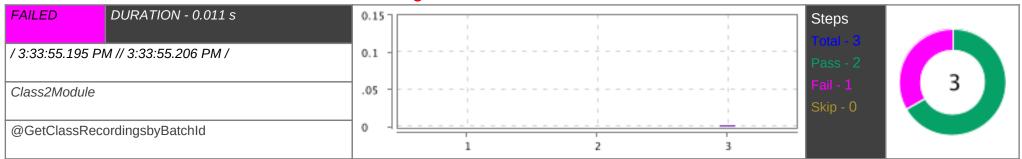

#	Step / Hook Details	Status	Duration
1	Given Admin sets Authorization to Bearer Token	PASSED	0.000 s
2	When Admin creates GET Request and sends HTTPS Request with endpoint for getClassRecordingsByBatchID	PASSED	0.000 s
3	Then Admin receives 200 OK Status with response body for getClassRecordingsByBatchID	FAILED	0.002 s
	io.cucumber.java.PendingException: TODO: implement me at stepDefinitions.class2Steps.admin_receives_ok_status_with_response_body_for_get_class_recordings_by_batch_id(class2Steps.java:80) at ?.Admin receives 200 OK Status with response body for getClassRecordingsByBatchID(file:///Users/mathumathibalakrishnan/eclipse/ Mathumathi_2024/Team2_ChangeMakers_RestAssured/src/test/resources/features/class2.feature:13) * Not displayable characters are replaced by '?'.		

Check if admin able to retrieve all class recording

DETAILED SECTION -- 8 --

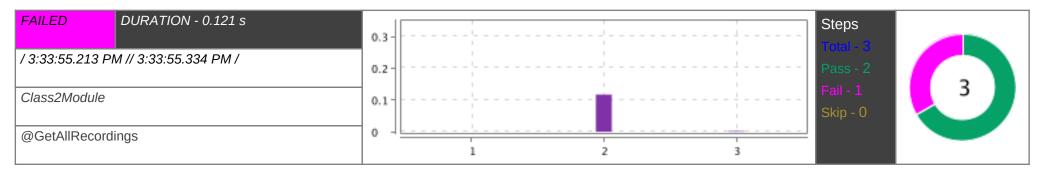

# Step / Hook Details	2	Status	Duration
1 Given Admin sets Authorization to Bearer Token	PAS	SSED	0.000 s
2 When Admin creates GET Request and sends HTTPS Request with endpoint fo	r getAllRecordings PAS	SSED	0.117 s
Then Admin receives 200 OK Status with response body for getAllRecordings	FAIL	ILED	0.002 s
io.cucumber.core.exception.CucumberException: Step [Admin receives 200 OK Status w 1 parameters at 'stepDefinitions.class2Steps.admin_receives_ok_status_with_response_However, the gherkin step has 0 arguments. Step text: Admin receives 200 OK Status wi at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitiat io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatation.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.PickleStepDefsetStep.run(PickleStepDefsetStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.core.runnime.CucumberRunner.lambda\$runScenario\$1(TestNGCucur at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(Cuc at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.runTestCase) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(Rethrowat io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(Rethrowat io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.runTestCase) at io.cucumber.core.runtime.CucumberExecutionContext.runScenario(TestNGCucumberRunne at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunne at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunne at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunne at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunne at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunne at io.cucumber.testng.TestNGCucumberRunner.runNcenario(TestNeconicumber.core.runner.getPlantario(TestNeconicumber.getPlantario(AbstractTestNGCucumberRunner.runNcenario(TestNGCucumberRunner.getPlantario(AbstractTe	ith response body for getAllRecordings] is defined with body_for_getallrecordings(java.lang.Integer)'. Ith response body for getAllRecordings ionMatch.java:83) ionMatch.java:42) ImberRunner.java:132) ImberExecutionContext.java:137) InvingThrowableCollector.java:23) InutionContext.java:137) Incipava:129) IncumberTests.java:35) IdleAccessor.java:103) Injava:133)	ILED	0.002 s

#	Step / Hook Details	Status	Duration
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1596)		
	at org.testng.TestRunner.privateRun(TestRunner.java:794)		
	at org.testng.TestRunner.run(TestRunner.java:596)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:377)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:371)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:332)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:276)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:53)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:96)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1212)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1134)		
	at org.testng.TestNG.runSuites(TestNG.java:1063)		
	at org.testng.TestNG.run(TestNG.java:1031)		
	at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115)		
	at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251)		
	at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77)		