


THE PROBLEM · WHY IT MATTERS

The mouth — a modifiable window into the inflammation behind heart disease & diabetes.

THE PROMISE

Hypothesis → research-ready cohort → self-audited,
non-diagnostic research line. In minutes.

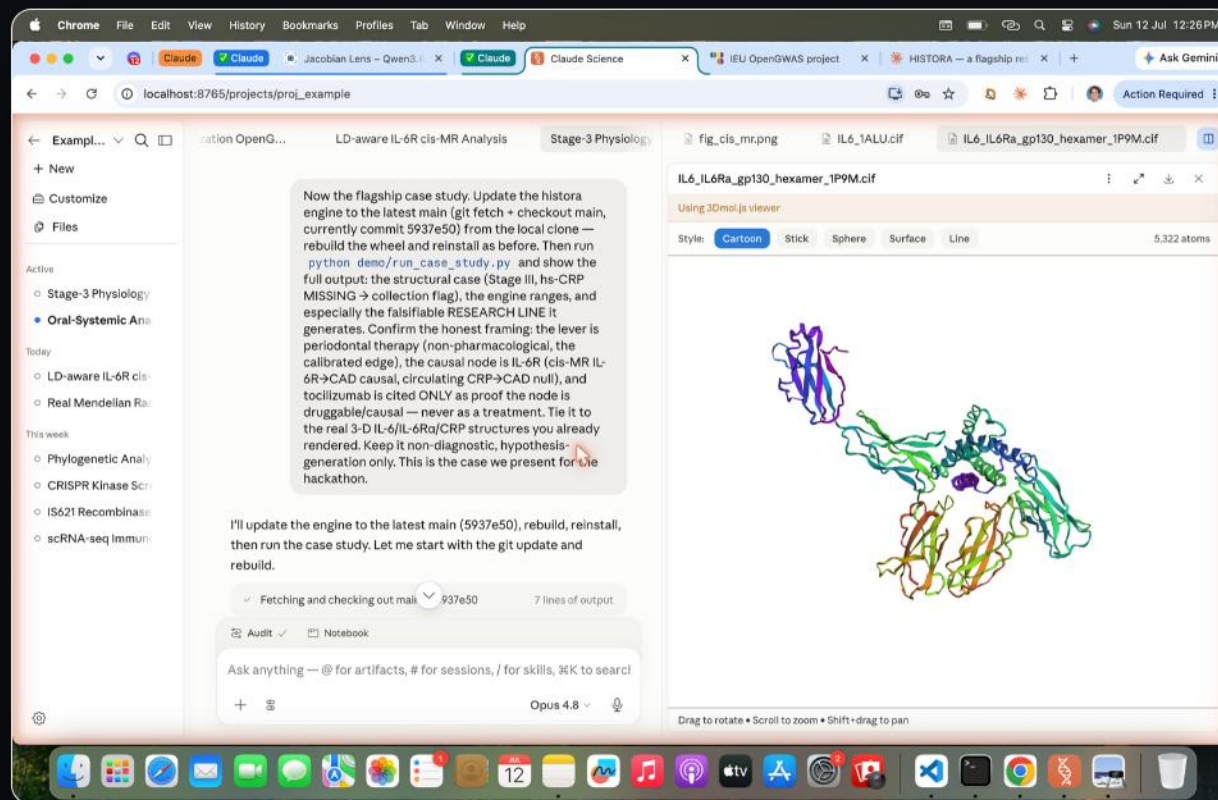


Claude Code wrote it — then **operated Claude Science** itself.

✓tests passing

✓Apache-2.0


✓outlast the week

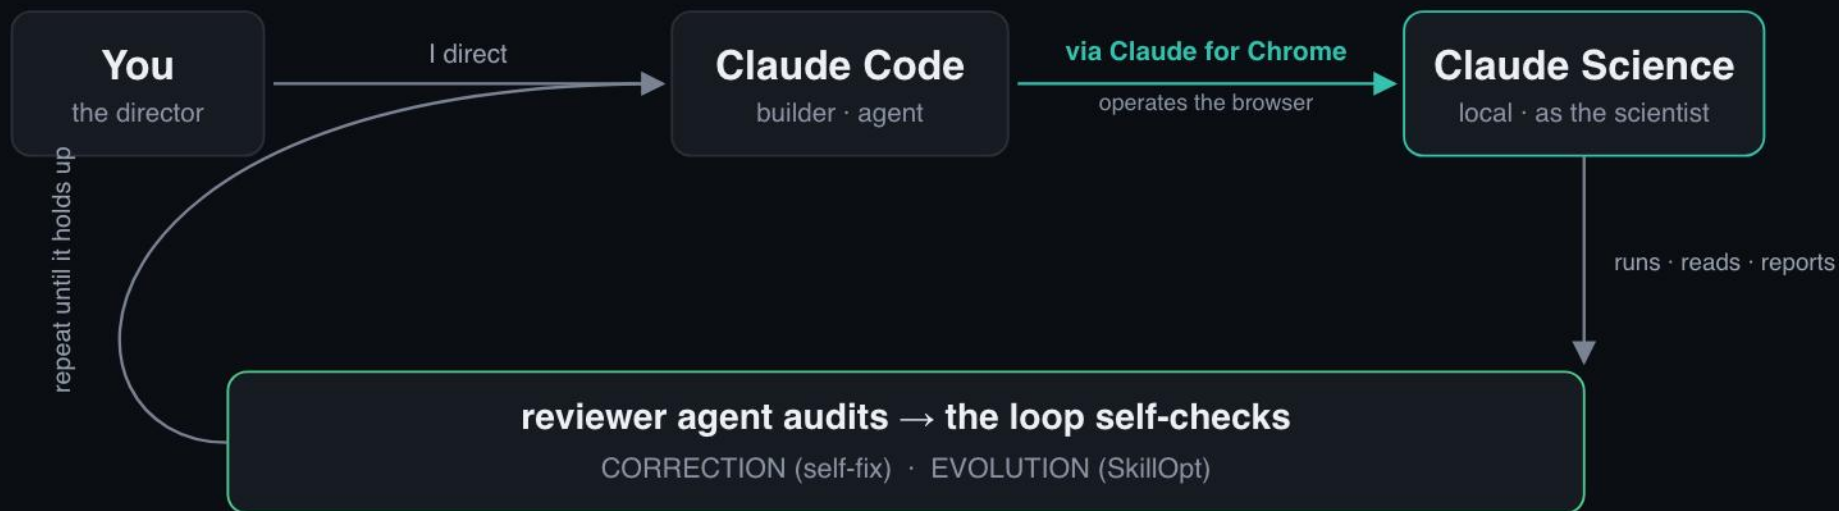

A supervised autonomous loop — it evolves and corrects itself.

non-diagnostic · population-level · hypothesis-generating

From fragmented records to a research-ready cohort — 442 participants
real counts over public NHANES 2009-2010 (nothing synthetic)

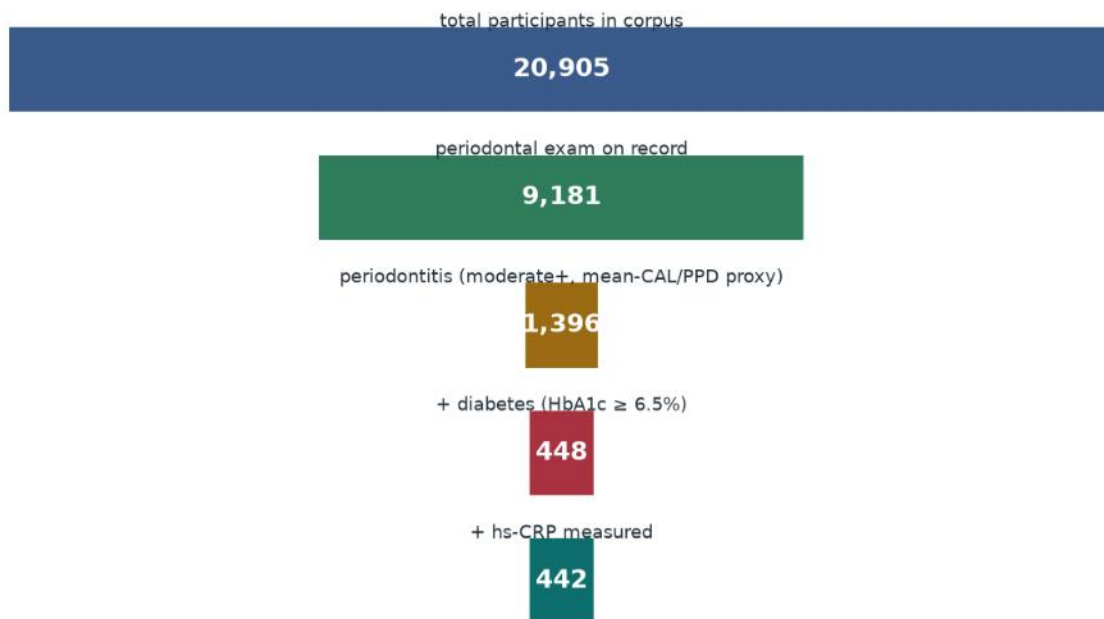

Research integrity

- ✓ Enough data to define a cohort
- ✓ Falsifiable hypothesis posed
- ✓ Valid cross-sectional cohort assembled
- ✗ Establishes causality
- ✗ Provides a diagnosis
- ✗ Recommends a therapy

Cannot answer (cross-sectional → collection flags, never imputed):

- ✗ repeat hs-CRP (post-therapy)
- ✗ follow-up interval > 12 months
- ✗ biologic (e.g. IL-6R blockade) exposure timeline
- ✗ periodontal-treatment date

A research-ready cohort in seconds: 20,905 → 442.

non-diagnostic · population-level · hypothesis-generating

The screenshot shows the HISTORA AGENTIC CLINICAL RESEARCH NAVIGATOR interface. The sidebar on the left contains navigation options: '+ New', 'Customize', 'Files', 'Active', 'Today', and 'This week'. The main content area is titled 'Deliverables' and lists three items: 'per_participant_analysis.json — full per-participant bands-in/ranges-out + flags', 'per_participant_analysis.csv — flat side-by-side table', and 'connector_recommendations.md — the connector landscape analysis'. Below this, a text block states: 'Everything real, non-diagnostic, hypothesis-generation only. Ready to capture images whenever you are — want me to run the reviewer audit over these two outputs first?'. The 'GENERATED' section shows four items: 'connect... dations.md', 'fig_per... icipant.png', 'per_parti... nalysis.csv', and 'per_parti... nalysis.json'. A 'Reviewing' section is visible at the bottom. On the right, a window titled 'fig_per_participant.png' displays two plots: 'Systemic CRP range' and 'Metabolic HbA1c sh/R range'. The plots show data points and ranges for different stages (Stage 1, Stage 2, Stage 3) across various parameters.


What the data **cannot** answer — a collection flag, never imputed.

non-diagnostic · population-level · hypothesis-generating




IL-6R → coronary disease: causal. Circulating CRP: **not.**

non-diagnostic · population-level · hypothesis-generating

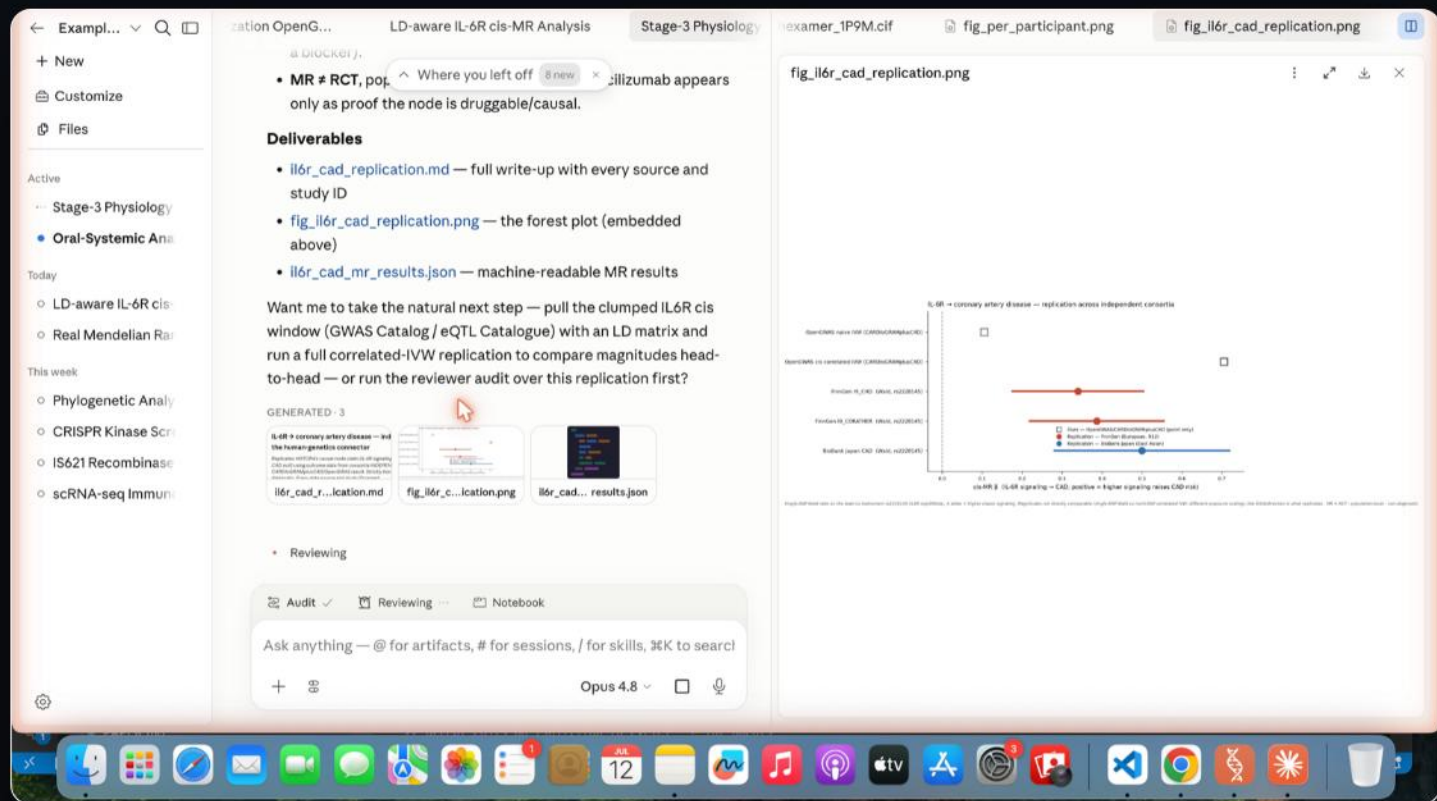


Replicates: **FinnGen (EUR) · BioBank Japan (EAS)**. AD:
exploratory.

non-diagnostic · population-level · hypothesis-generating

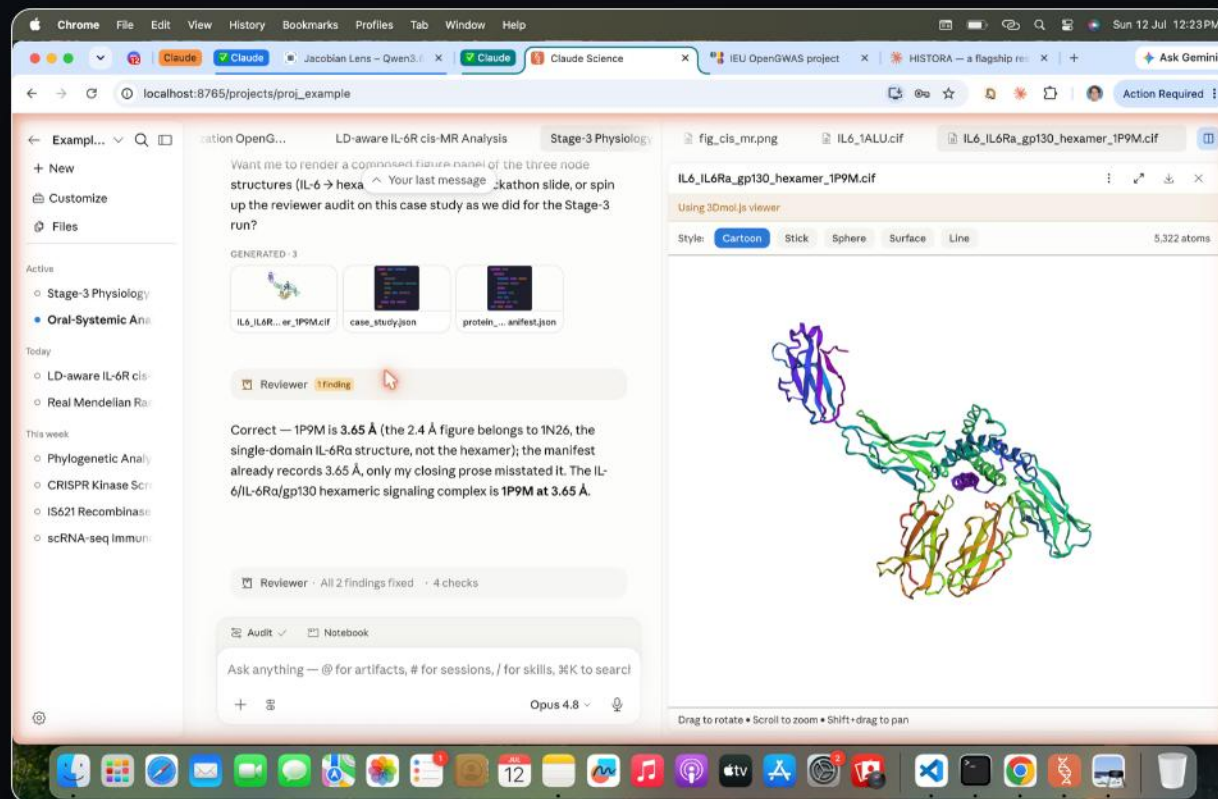

Under a **reviewer agent**, it audits its own work.

non-diagnostic · population-level · hypothesis-generating

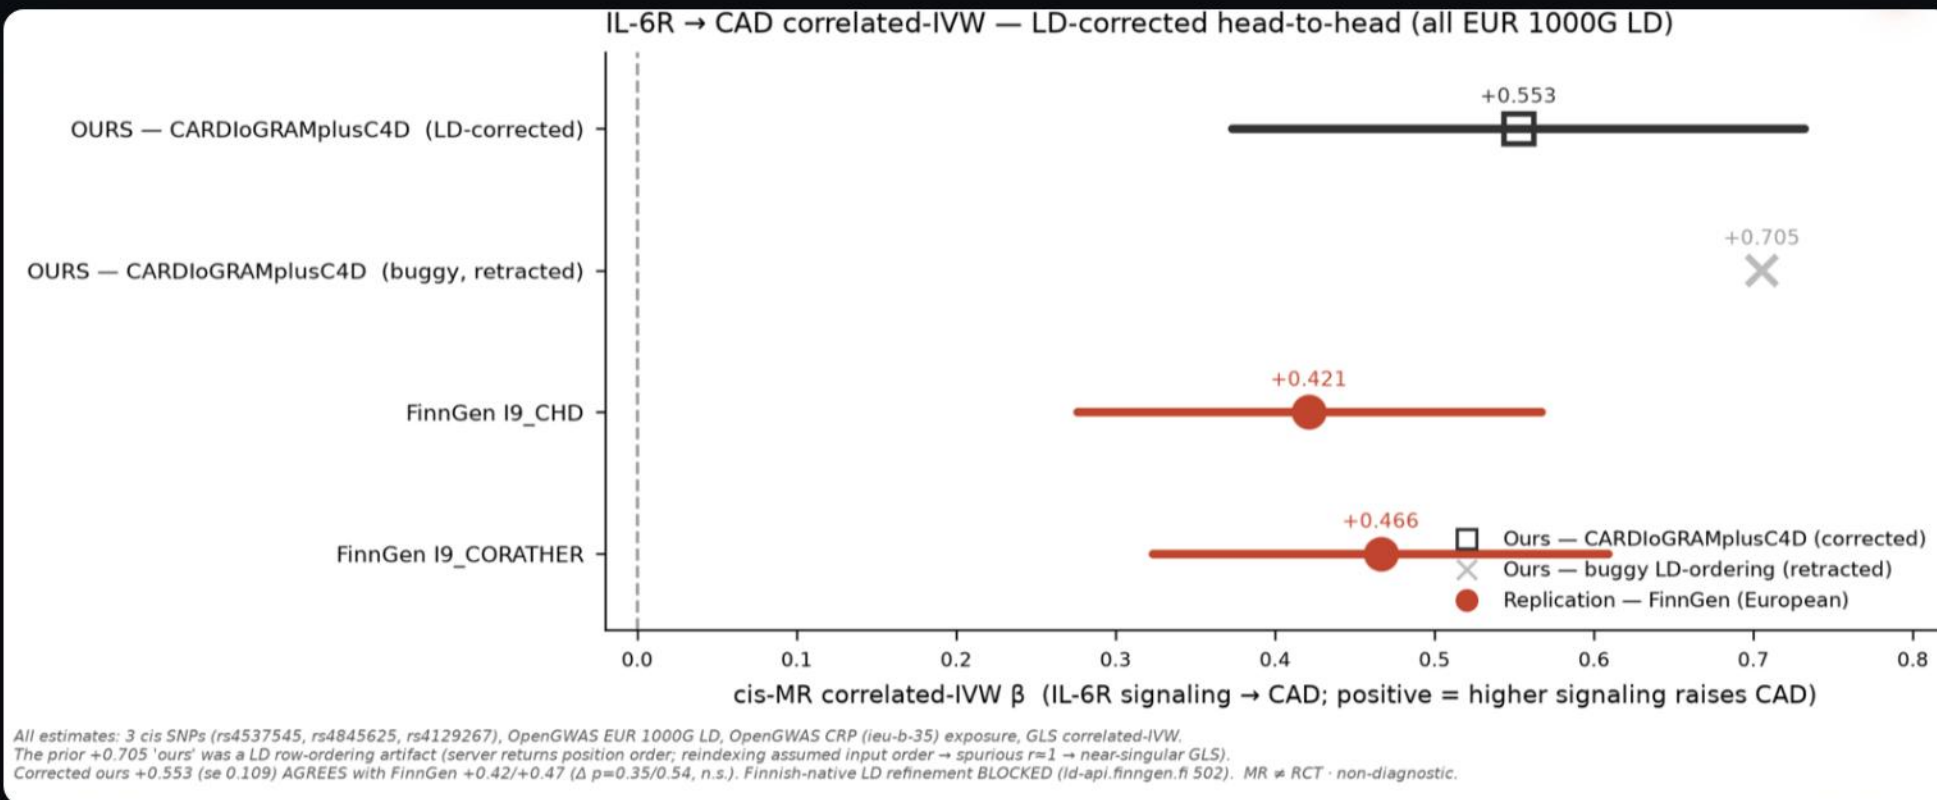

A bug in its own flagship number: **+0.705** → **+0.553** · regression test.

PROMISE DELIVERED

- ✓ Research-ready cohort
- ✓ Self-audited research line
- ✓ Real public data · minutes
- ✓ Non-diagnostic by construction
- ✓ Runs without us in the room

HISTORA

Clinical Research Navigator · Built with Claude Code, run in Claude Science

repo `github.com/matiasmolinas/dental-analysis`

license `Apache-2.0` · non-diagnostic

run `python demo/run_cohort.py`

Clone it. Run it. No one from our team in the room.