Modyfikacje/hybrydyzacje algorytmu PSO w zadaniu optymalizacji globalnej wielowymiarowej funkcji ciaglej

PSO-DE Hybrid

Jakub Ruszkowski, Mateusz Kaczmarski

ABSTRACT

Dokumentacja uzyskanych wynikow hybrydy PSO-DE

Categories and Subject Descriptors

G.1.6 [Numerical Analysis]: Optimization—global optimization, unconstrained optimization; F.2.1 [Analysis of Algorithms and Problem Complexity]: Numerical Algorithms and Problems

General Terms

Algorithms

Keywords

Benchmarking, PSODE, Optymalizacja wielowymiarowej funkcji ciaglej

1. CPU TIMING

In order to evaluate the CPU timing of the algorithm, we have run the PSO-DE Hybrid on the function f_8 with restarts for at least 30 seconds and until a maximum budget equal to 400(D+2) is reached. The code was run on a Mac Intel(R) Core(TM) i5-2400S CPU @ 2.50GHz with 1 processor and 4 cores. The time per function evaluation for dimensions 2, 3, 5, 10, 20, 40 equals x.x, x.x, x.x, x.x, x.x, x.x, and xxx milliseconds respectively.

repeat the above for the second algorithm

2. RESULTS

permission and/or a fee.

Results from experiments according to [?] on the benchmark functions given in [?, ?] are presented in Figures 1, 2 and 3 and in Table 1. The **expected running time** (**ERT**), used in the figures and table, depends on a given target function value, $f_t = f_{\text{opt}} + \Delta f$, and is computed over all relevant trials as the number of function evaluations executed during each trial while the best function value did not reach f_t , summed over all trials and divided by the number

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy otherwise, to republish, to post on servers or to redistribute to lists, requires prior specific

GECCO'13, July 6-10, 2013, Amsterdam, The Netherlands. Copyright 2013 ACM TBA ...\$15.00.

of trials that actually reached f_t [?, ?]. Statistical significance is tested with the rank-sum test for a given target Δf_t (10⁻⁸ as in Figure 1) using, for each trial, either the number of needed function evaluations to reach Δf_t (inverted and multiplied by -1), or, if the target was not reached, the best Δf -value achieved, measured only up to the smallest number of overall function evaluations for any unsuccessful trial under consideration.

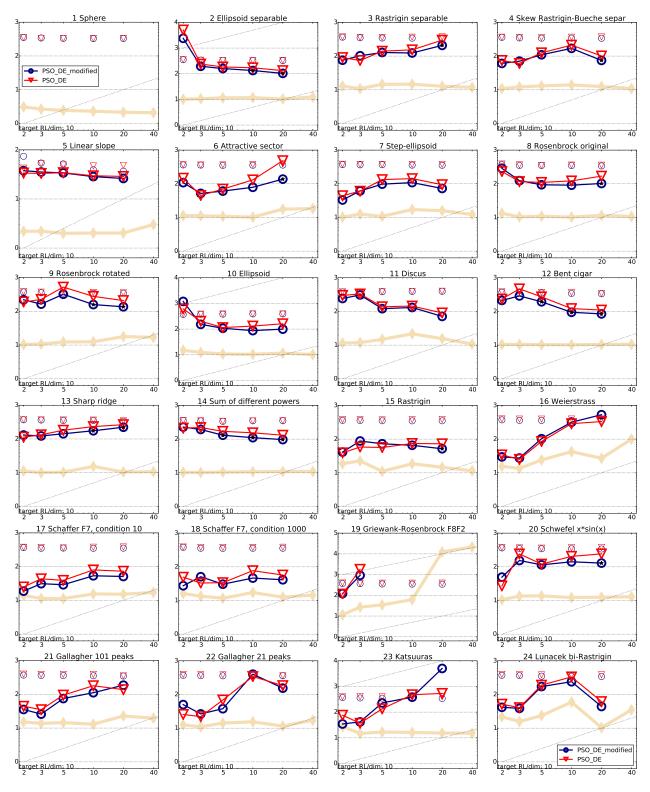


Figure 1: Expected running time (ERT in number of f-evaluations as \log_{10} value) divided by dimension versus dimension. The target function value is chosen such that the bestGECCO2009 artificial algorithm just failed to achieve an ERT of $10 \times \text{DIM}$. Different symbols correspond to different algorithms given in the legend of f_1 and f_{24} . Light symbols give the maximum number of function evaluations from the longest trial divided by dimension. Black stars indicate a statistically better result compared to all other algorithms with p < 0.01 and Bonferroni correction number of dimensions (six). Legend: \circ :PSO DE modified, ∇ :PSO DE.

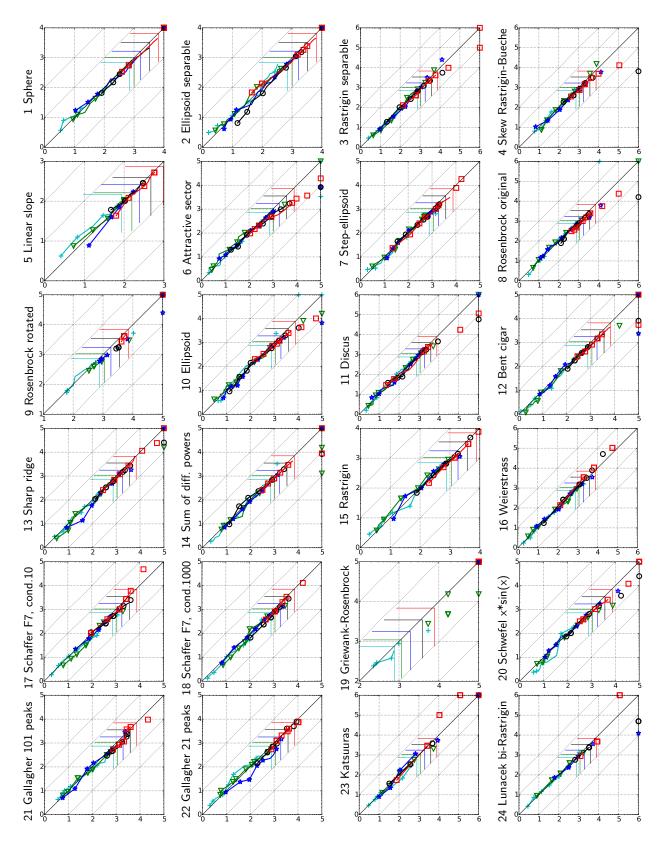


Figure 2: Expected running time (ERT in \log_{10} of number of function evaluations) of PSO DE modified (y-axis) versus PSO DE (x-axis) for 8 runlength-based target function values for budgets between $0.5 \times \text{DIM}$ and $50 \times \text{DIM}$ evaluations. Each runlength-based target f-value is chosen such that the ERTs of the bestGECCO2009 artificial algorithm for the given and a slightly easier target bracket the reference budget. Markers on the upper or right edge indicate that the respective target value was never reached. Markers represent dimension: 2:+, 3: , 5:*, 10:0, 20: , 40:.

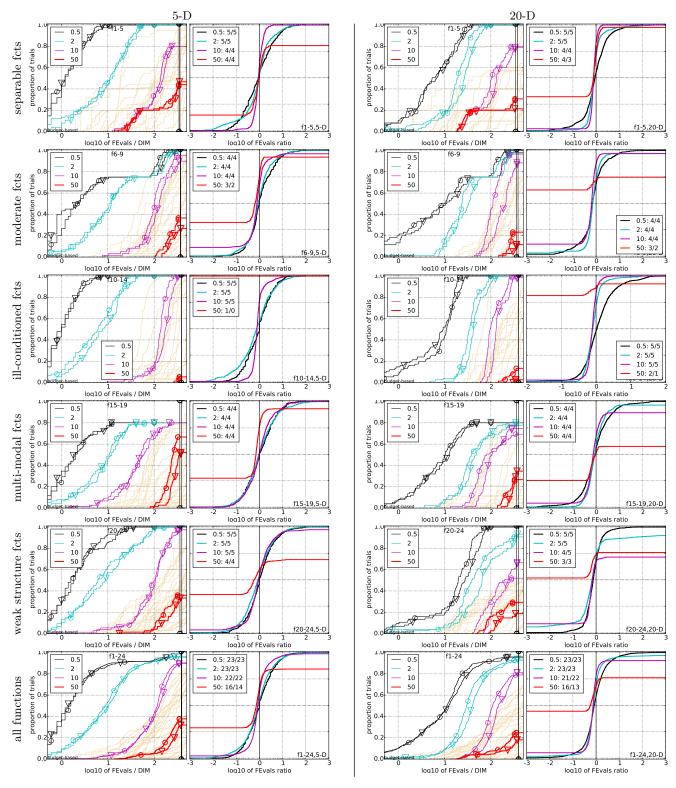


Figure 3: Empirical cumulative distributions (ECDF) of run lengths and speed-up ratios in 5-D (left) and 20-D (right). Left sub-columns: ECDF of the number of function evaluations divided by dimension D (FEvals/D) to fall below $f_{\rm opt} + \Delta f$ for PSO DE modified (\circ) and PSO DE (\bigtriangledown) where Δf is the target just not reached by the GECCO-BBOB-2009 best algorithm within a budget of $k \times {\rm DIM}$ evaluations, with k being the value in the legend. Right sub-columns: ECDF of FEval ratios of PSO DE modified divided by PSO DE for runlength-based targets; all trial pairs for each function. Pairs where both trials failed are disregarded, pairs where one trial failed are visible in the limits being >0 or <1. The legends indicate the target budget of $k \times {\rm DIM}$ evaluations and, after the colon, the number of functions that were solved in at least one trial (PSO DE modified first).

5-D 20-D

9-D			20-1	U			
	#FEs/D	0.5	1.2	3	10	50	#succ
#FEs/D 0.5 1.2 3 10 50 #s	succ f ₁	6.3e+1:24	4.0e+1:42	1.0e-8:43	1.0e-8:43	1.0e-8:43	15/15
	/15 1. PSO	14(6)	13(3)	∞*3	∞*3	$\infty 6500 \times 3$	0/15
1: PSO 3.6(4) 4.3(4) ∞ ∞ ∞ 1600 0/	/15 2. PSO	16(8)	16(4)	∞	∞	∞6600	0/15
	/15	4.0e+6:29	2.5e+6:42	1.0e+5:65	1.0e+4:207	1.0e-8:412	15/15
	1 DCO	2.4(2)	3.3(3)	17 (1)*	10 (0.9)*3	∞6400 ^{*2}	0/15
	/13	1.6(2)	2.4(2)	21(3)	13(1)	∞6500	0/15
	/10	6.3e+2:33	4.0e+2:44	1.6e+2:109	1.0e+2:255	2.5e+1:3277	15/15
f ₃ 1.6e+2:4.1 1.0e+2:15 6.3e+1:23 2.5e+1:73 1.0e+1:716 15/ 1: PSO 2.0(2) 2.4(2) 4.7(4) 8.8(3) 4.5(4) 7/		3.9(3)	9.4(4)*	20(4)	16(4)*	31(48)	1/15
		4.2(4)	14(5)	25(5)	23(15)	∞7400	0/15
	/						15/15
f ₄ 2.5e+2:2.6 1.6e+2:10 1.0e+2:19 4.0e+1:65 1.6e+1:434 15/		6.3e+2:22	4.0e+2:91	2.5e+2:250	1.6e+2:332	6.3e+1:1927	
	/15 1: PSO	17(13)	8.4(3)	5.9(1)*	9.1(3)*2	6.9(7)*2	7/15
	/15 2: PSO	19(14)	12(3)	8.1(2)	13(2)	57(111)	1/15
	/15 f ₅	2.5e+2:19	1.6e+2:34	1.0e-8:41	1.0e-8:41	1.0e-8:41	15/15
	/15 1: PSO	2.3(1)	3.5(0.9)	13(4)	13(2)	13(3)	15/15
	/15 2: PSO	3.3(3)	3.8(2)	14(3)	14(5)	14(5)	15/15
f ₆ 1.0e+5:3.0 2.5e+4:8.4 1.0e+2:16 2.5e+1:54 2.5e-1:254 15/ 1: PSO 2.8(2) 2.5(5) 4.9(4) 5.6(4) 33(56) 3/		2.5e+5:16	6.3e+4:43	1.6e+4:62	1.6e+2:353	1.6e+1:1078	15/15
	/15 1: PSO /15 2: PSO	6.0(7)	4.8(2)	5.0(4)	7.8(3)*3	18(23)*3	5/15
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		7.0(4)	6.0(2)	6.1(3)	27(14)	∞ 7500	0/15
	'. ±7	1.0e+3:11	4.0e+2:39	2.5e+2:74	6.3e+1:319	1.0e+1:1351	15/15
2: PSO 3.1(2) 3.7(4) 5.3(4) 12(5) 3.8(0.5) 14/	, 1.100	2.2(2)	6.5(5)	6.3(4)	4.6(1.0)	13(19)	5/15
		2.1(2)	7.6(6)	7.1(3)	5.9(2)	13(15)	6/15
	/15 -8	4.0e+4:19	2.5e+4:35	4.0e+3:67	2.5e+2:231	1.6e+1:1470	
	/15 I: FSU	17(5)	10(4)*2	13(3)*3	8.8(1.0)*3	16(11)	4/15
	2.150	23(9)	17(6)	21(2)	15(9)	69(61)	1/15
	/1 = 19	1.0e+2:357	6.3e+1:560	4.0e+1:684	2.5e+1:756	1.0e+1:1716	15/15
2: PSO 39(18) 35(10) 32(10) 42(69) ∞1700 0/	/15 1.150	7.6(3)	7.3(2)	6.5(4)	6.4(5)	∞ 6700	0/15
	715 2: PSU	12(6)	9.2(4)	8.2(0.7)	8.4(3)	∞6800	0/15
	/ ₁₅ ¹ 10	1.6e+6:15	1.0e+6:27	4.0e+5:70	6.3e+4:231	4.0e+3:1015	15/15
	7/15 I: PSO	14(5)	12(6)	10(1.0)	8.6(5)	10(5)*	9/15
f ₁₁ 1.0e+6:3.0 6.3e+4:6.2 6.3e+2:16 6.3e+1:74 6.3e-1:298 15/	715 2: PSO	10(10)	13(10)	12(6)	14(12)	56(63)	2/15
	/15 [‡] 11	4.0e+4:11	2.5e+3:27	1.6e+2:313	1.0e+2:481	1.0e+1:1002	15/15
	7/15 I: PSU	2.6(4)	4.2(3)	4.6(1)	4.9(1)	116(132)	1/15
f ₁₂ 4.0e+7:3.6 1.6e+7:7.6 4.0e+6:19 1.6e+4:52 1.0e+0:268 15/	/15 2: PSO	2.0(0.8)	3.9(3)	5.8(2)	6.0(4)	∞8000	0/15
	/15 f ₁₂	1.0e+8:23	6.3e+7:39	2.5e+7:76	4.0e+6:209	1.0e+1:1042	15/15
2: PSO $2.1(0.9)$ $2.6(3)$ $4.5(3)$ $26(5)$ $\infty 1800$ $0/$	7/15 I: PSO	12(4)	11(4)	11(3)*2	8.1(1.0)*2	² ∞6600 ^{*3}	0/15
	715 2: PSU	12(8)	15(4)	15(2)	11(2)	∞ 6700	0/15
	/15 [‡] 13	1.6e+3:28	1.0e+3:64	6.3e+2:79	4.0e+1:211	2.5e+0:1724	15/15
2: PSO $3.1(3)$ $4.7(5)$ $5.8(4)$ $17(3)$ $\infty 1800$ $0/$	/15 1: PSO	9.4(5)	11(3)	15(2)*	21 (4)*	∞ 6700	0/15
f ₁₄ 1.6e+1:3.0 1.0e+1:10 6.3e+0:15 2.5e-1:53 1.0e-5:251 15/	/15 2: PSO	10(6)	13(2)	18(5)	25(3)	∞ 6800	0/15
	/15 f ₁₄	2.5e+1:15	1.6e+1:42	1.0e+1:75	1.6e+0:219	6.3e-4:1106	15/15
	/15 1: PSO	18(3)	11(4)	11(4)	8.9(2)*2	∞6900 ^{*3}	0/15
	2: PSO	22(16)	13(7)	13(2)	12(1)	∞ 7000	0/15
	/15 [‡] 15	6.3e+2:15	4.0e+2:67	2.5e+2:292	1.6e + 2:846	1.0e+2:1671	15/15
2: PSO 4.3(4) 2.5(2) 4.5(3) 5.1(5) 7.4(9) 10/	/15 1: PSO	10(5)	7.4(2)	3.5(2)	3.5(1)	4.6(5)	10/15
f ₁₆ 4.0e+1:4.8 2.5e+1:16 1.6e+1:46 1.0e+1:120 4.0e+0:334 15/		13(10)	9.0(6)	5.0(1)	4.8(0.8)	5.4(7)	11/15
1: PSO 2.4(4) 1.7(2) 1.9(1) 4.3(3) 11(13) 6/	/15 f₁₆	4.0e+1:26 5.3(10)	2.5e+1:127 28(16)	1.6e+1:540 20(16)	1.6e+1:540 20(13)	1.0e+1:1384 75(51)	15/15 1/15
2: PSO 1.8(4)	/15 1: PSO 2: PSO	5.1(4)	16(18)	12(5)	12(10)	41(64)	2/15
f ₁₇ 1.0e+1:5.2 6.3e+0:26 4.0e+0:57 2.5e+0:110 6.3e-1:412 15/		1.6e+1:11	1.0e+1:63	6.3e+0:305	4.0e+0:468	1.0e+0:1030	15/15
1: PSO 4.3(4) 2.4(1) 2.6(2) 2.7(2) 2.2(1) 15/	/15 f ₁₇ /15 1: PSO	1.6e + 1:11 10(6)	6.3(6)	3.3(0.6)	4.0e+0:468 5.9(1)	47(35)	2/15
	/ 10 DCO	8.6(7)	7.1(5)	4.8(1)	5.8(2)	14(11)	7/15
f ₁₈ 6.3e+1:3.4 4.0e+1:7.2 2.5e+1:20 1.6e+1:58 1.6e+0:318 15/	/10	4.0e+1:116	2.5e+1:252	1.6e+1:430	1.0e+1:621	4.0e+0:1090	15/15
1: PSO 1.7(2) 3.6(5) 3.4(4) 2.6(3) $\mathbf{4.2(0.8)}^*$ 14/		3.3(2)	3.3(1.0)	4.8(9)	5.5(8)	12(10)	7/15
	/15 2. PSO	4.1(2)	4.5(3)	5.4(3)	5.5(2)	15(4)	6/15
f ₁₉ 1.6e-1:172 1.0e-1:242 6.3e-2:675 4.0e-2:3078 2.5e-2:4946 15/	/15 f = 0	1.6e-1:2.5e5	1.0e-1:3.4e5	6.3e-2:3.4e5	4.0e-2:3.4e5	2.5e-2:3.4e5	3/15
	/ 1. DSO	∞	∞	∞	∞	∞ 6800	0/15
	/15 2: PSO		∞	∞	∞	∞ 7700	0/15
f ₂₀ 6.3e+3:5.1 4.0e+3:8.4 4.0e+1:15 2.5e+0:69 1.0e+0:851 15/		1.6e+4:38	1.0e+4:42	2.5e+2:62	2.5e+0:250	1.6e+0:2536	15/15
	/ 10 1 DCO	8.4(3)	9.3(4)	15(2)*	10(2)*3	4.7(5)	7/15
	710 2. DCO	8.6(3)	11(3)	21(6)	19(11)	14(17)	3/15
	/ · · ·	6.3e+1:36	4.0e+1:77	4.0e+1:77	1.6e+1:456	4.0e+0:1094	15/15
	/15 1: PSO	15(7)	11(5)	11(4)	8.2(8)	8.7(13)	7/15
	/10 0 DCO	21(10)	17(3)	17(5)	6.0(5)	20(8)	4/15
	/5 2: PSO /15 f₂₂	6.3e+1:45	4.0e+1:68	4.0e+1:68	1.6e+1:231	6.3e+0:1219	15/15
	/15 1: PSO	12(5)	19(4)	19(5)	13(11)	6.1(13)	8/15
	/15 /15 2: PSO	17(12)	19(8)	19(7)	16(16)	8.4(16)	7/15
	/15 f₂₃	6.3e+0:29	4.0e+0:118	2.5e+0:306	2.5e+0:306	1.0e+0:1614	15/15
	/15 1: PSO	1.9(1)	25(45)	329(322)	329(566)	∞ 6800	0/15
	/10 0 DCO	2.7(3)	22(22)	35(17)	35(45)	∞ 7900	0/15
	/15 f ₂₄	2.5e+2:208	1.6e+2:918		6.3e+1:9885	4.0e+1:31629	
	/ ₁₅ 1: PSO	4.2(1)	5.1(5)	∞	∞	∞ 6800	0/15
	2: PSO	5.9(2)	9.2(7)	17(20)	∞	∞ 7700	0/15

Table 1: Expected running time (ERT in number of function evaluations) divided by the respective best ERT measured during BBOB-2009 in dimensions 5 (left) and 20 (right). The ERT and in braces, as dispersion measure, the half difference between 90 and 10%-tile of bootstrapped run lengths appear for each algorithm and run-length based target, the corresponding best ERT (preceded by the target Δf -value in *italics*) in the first row. #succ is the number of trials that reached the target value of the last column. The median number of conducted function evaluations is additionally given in *italics*, if the target in the last column was never reached. 1:PSO is PSO DE modified and 2:PSO is PSO DE. Bold entries are statistically significantly better compared to the other algorithm, with p = 0.05 or $p = 10^{-k}$ where $k \in \{2, 3, 4, ...\}$ is the number following the * symbol, with Bonferroni correction of 48. A \$\pi\$ indicates the same tested against the best algorithm of BBOB-2009.