

# Olmsted: Rich Interactive Visualization of B Cell Lineages

David H. Rich<sup>1</sup>, Elias Harkins<sup>1</sup>, Christopher T. Small<sup>1</sup>, Kevin Sung<sup>1</sup>,  
Laura Doecker<sup>2</sup>, Duncan Ralph<sup>1</sup>, Amrit Dhar<sup>1</sup>, Mackenzie S.  
Kopp<sup>2</sup>, Julie Overbaugh<sup>2</sup>, and Frederick A. Matsen IV<sup>1</sup>¶

<sup>1</sup> Computational Biology Program, Fred Hutchinson Cancer Center, Seattle, WA, USA <sup>2</sup> Human Biology  
Division, Fred Hutchinson Cancer Center, Seattle, WA, USA ¶ Corresponding author

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

## Software

- [Review](#) ↗
- [Repository](#) ↗
- [Archive](#) ↗

Editor: [Open Journals](#) ↗

## Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

## License

Authors of papers retain copyright  
and release the work under a  
Creative Commons Attribution 4.0  
International License ([CC BY 4.0](#)).

## Summary

Olmsted is an open-source, browser-based application for visually exploring B cell repertoires and clonal family tree data. The immune system learns to recognize new threats by mutating and selecting the cells that produce antibodies, a process that leaves behind a branching evolutionary record much like a family tree. In immunological terms, this affinity maturation of B cell receptor sequences coding for immunoglobulins (antibodies) begins with a diverse pool of randomly generated naive sequences and leads to a collection of evolutionary histories. High-throughput DNA sequencing of the B cell repertoire, combined with computational reconstruction of these evolutionary histories, produces large collections of clonal families and their associated phylogenetic trees. Olmsted enables researchers to scan across collections of clonal families using summary statistics, then interactively explore individual families to visualize phylogenies and amino acid mutations that occurred during affinity maturation.

## Statement of Need

Researchers studying B cell responses rely on high-throughput sequencing to characterize antibody repertoires. Computational tools can reconstruct the evolutionary histories of these sequences, producing large collections of clonal families (groups of sequences descended from a common naive ancestor) and phylogenetic trees describing their diversification. However, researchers often lack tools to explore these reconstructions in the detail necessary to choose sequences for functional, structural, or biochemical studies.

Existing visualization tools address different analytical goals. AncesTree (Foglierini et al., 2020) provides detailed single-tree exploration with amino acid mutation display, but requires Java installation, processes one lineage at a time without a repertoire overview, and handles heavy or light chains separately rather than as pairs. ViCloD (Jusset et al., 2023) focuses on large-scale intraclonal diversity analysis across hundreds of thousands of sequences, primarily for characterizing B cell tumors; it analyzes heavy chains only. AIRRscope (Waltari et al., 2022) enables comparison across multiple repertoires to identify convergent antibody responses at the population level, again for heavy chains only. ImmuneDB (Rosenfeld et al., 2016) presents collections in paginated list form for database-style querying.

Olmsted combines repertoire-level overview with detailed lineage exploration. Researchers can scan across all clonal families in a scatterplot, then drill down to examine phylogenetic trees with aligned amino acid sequences showing mutations from the naive ancestor. This multi-scale navigation is delivered through a zero-installation web application that keeps data client-side, supporting practical decisions about which sequences to prioritize for downstream experimental studies. Specifically, Olmsted allows users to:

- View all clonal families simultaneously in a configurable scatterplot
- Filter and select families based on biological criteria (mutation frequency, sequence count, V(D)J gene usage)
- Examine phylogenetic trees with aligned sequences showing mutations from the naive ancestor
- Trace the mutational history of individual sequences back to their germline origin
- Visualize paired heavy and light chain sequences together, which is essential for selecting antibodies for expression

Earlier versions of Olmsted supported the interactive exploration of B cell lineages in studies of HIV-1-specific antibody responses by the Overbaugh group (Doepker et al., 2020, 2021; Simonich et al., 2019; Williams et al., 2018), where it was used to navigate and interrogate reconstructed clonal families.

Olmsted requires no installation: users simply visit [olmstedviz.org](https://olmstedviz.org) and upload their data directly into their local web browser. Data processing is handled by a companion olmsted command-line tool, hosted at the [olmsted-cli](https://github.com/olmsted/olmsted-cli) repository. This tool converts common immunoinformatics formats into Olmsted's input format.

## Features

### Client-Side Data Management

Users visit [olmstedviz.org](https://olmstedviz.org) and load data via drag-and-drop or file browser, with no installation, account creation, or data upload to external servers. All processing occurs client-side using browser-based storage (IndexedDB), ensuring that sensitive patient data never leaves the researcher's machine. Datasets persist across browser sessions, combining the convenience of a web application with the privacy of local software.

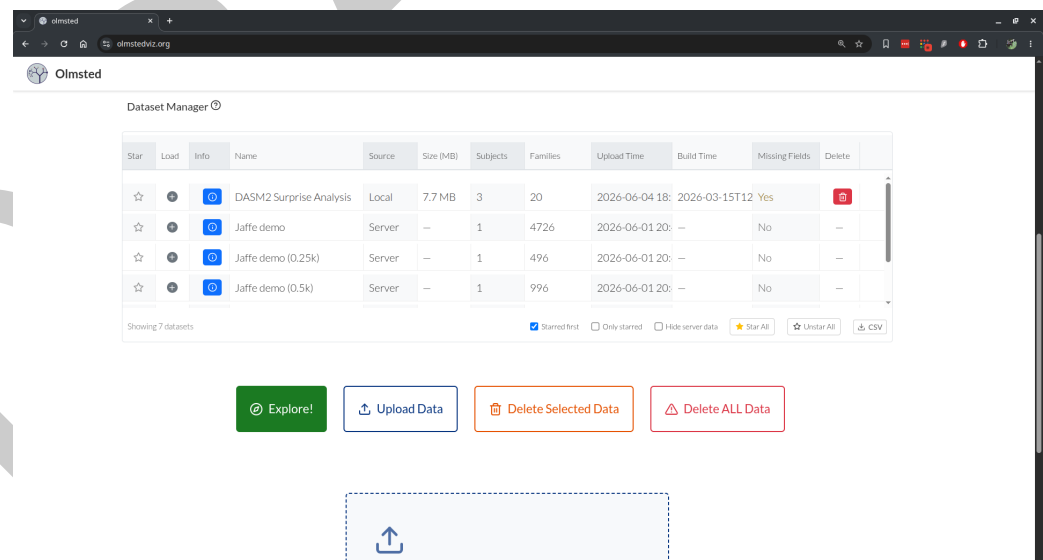


Figure 1: Dataset management interface.

### Data Preparation with olmsted-cli

The olmsted command-line tool converts data into Olmsted's JSON format. Unlike the web application, this data-preparation step requires a one-time install: olmsted-cli is a Python package (Python 3.8 or higher) installed with `pip install olmsted-cli` (or `pipx install olmsted-cli` for an isolated environment). It supports two input formats:

- **AIRR format:** The JSON-based standard developed by the Adaptive Immune Receptor Repertoire Community (AIRR Community, 2024; Rubelt et al., 2017; Vander Heiden et al., 2018). The AIRR lineage tree schema remains experimental and is evolving; we are not aware of any tools currently producing output in the newer schema versions, but are committed to supporting them as they become formalized.
- **PCP (Parent-Child Pair) format:** A CSV-based format with explicit parent-child relationships

Example usage:

```
# Generate a config from your data, then edit it
olmsted build-config -i data.json -o config.yaml
```

```
# Process with the config
olmsted process -c config.yaml -n "My Dataset" -o data-olmsted.json
```

The build-config command introspects input data and generates a YAML configuration listing all discoverable fields with inferred types and labels, which the user can edit before processing. These fields will dynamically populate plotting options and hover tooltip information. Once data preparation is done, the resulting file can be shared with collaborators, who then need only the web interface. Plot configurations can also be exported from the web app so they can be recreated later.

## Interactive Visualization

The visualization interface consists of four linked sections:

1. **Clonal Families Scatterplot:** Each clonal family appears as a point, with configurable axes, colors, and faceting. The filter tool narrows the selection of families displayed. Users can brush-select regions or click individual points.

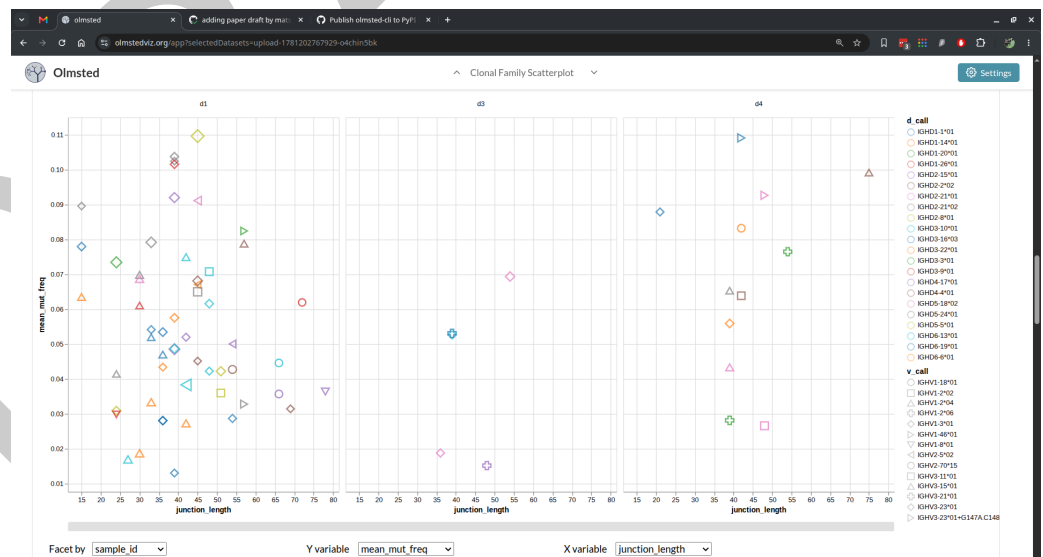


Figure 2: Example scatterplot.

2. **Selected Clonal Families Table:** Displays metadata for selected families, including V(D)J gene assignments and a visual representation of the recombination event. The table can be sorted by any column, and families can be starred for easy reference.

The screenshot displays the 'Clonal Family Selection Table' in the Olmsted web application. The table lists various clonal families with columns for selection status, information, naive sequence, family ID, unique sequence count, V and D gene segments, J gene, locus, chain, pairing status, and pair ID. The table is filtered to show 496 families. The selected family is d1\_104441-igk-104...

| Star | Select                              | Info | Naive sequence | Family ID             | Unique Seq Count | V gene      | D gene      | J gene   | Locus | Chain | Paired | Pair ID                    |
|------|-------------------------------------|------|----------------|-----------------------|------------------|-------------|-------------|----------|-------|-------|--------|----------------------------|
| ★    | <input type="checkbox"/>            |      |                | d1_106454-igk-106...  | 60               | IGHV4-34*01 | IGHD3-22*01 | IGHJ4*02 | igk   | heavy | Yes    | pair-d1_106454-igk-106...  |
| ★    | <input type="checkbox"/>            |      |                | d1_107458-igk-107...  | 54               | IGHV3-23*01 | IGHD6-6*01  | IGHJ4*02 | igk   | heavy | Yes    | pair-d1_107458-igk-107...  |
| ★    | <input type="checkbox"/>            |      |                | d1_1085-igk-1085-h... | 44               | IGHV3-7*03  | IGHD5-12*01 | IGHJ4*02 | igk   | heavy | Yes    | pair-d1_1085-igk-1085-h... |
| ☆    | <input type="checkbox"/>            |      |                | d1_104139-igk-104...  | 76               | IGHV1-3*01  | IGHD6-19*01 | IGHJ4*02 | igk   | heavy | Yes    | pair-d1_104139-igk-104...  |
| ☆    | <input type="checkbox"/>            |      |                | d1_104431-igk-104...  | 56               | IGHV3-15*01 | IGHD6-19*01 | IGHJ4*02 | igk   | heavy | Yes    | pair-d1_104431-igk-104...  |
| ☆    | <input checked="" type="checkbox"/> |      |                | d1_104441-igk-104...  | 76               | IGHV3-53*01 | IGHD1-26*01 | IGHJ4*02 | igk   | heavy | Yes    | pair-d1_104441-igk-104...  |
| ☆    | <input type="checkbox"/>            |      |                | d1_104797-igk-104...  | 60               | IGHV3-30*04 | IGHD3-22*01 | IGHJ5*02 | igk   | heavy | Yes    | pair-d1_104797-igk-104...  |
| ☆    | <input type="checkbox"/>            |      |                | d1_105013-igk-105...  | 58               | IGHV4-59*01 | IGHD1-26*01 | IGHJ2*01 | igk   | heavy | Yes    | pair-d1_105013-igk-105...  |
| ☆    | <input type="checkbox"/>            |      |                | d1_105121-igk-105...  | 74               | IGHV3-23*01 | IGHD6-13*01 | IGHJ4*02 | igk   | heavy | Yes    | pair-d1_105121-igk-105...  |
| ☆    | <input type="checkbox"/>            |      |                | d1_106382-igk-106...  | 50               | IGHV4-39*01 | IGHD6-19*01 | IGHJ1*01 | igk   | heavy | Yes    | pair-d1_106382-igk-106...  |
| ☆    | <input type="checkbox"/>            |      |                | d1_107034-igk-107...  | 48               | IGHV3-72*01 | IGHD1-7*01  | IGHJ6*02 | igk   | heavy | Yes    | pair-d1_107034-igk-107...  |
| ☆    | <input type="checkbox"/>            |      |                | d1_107679-igk-107...  | 56               | IGHV4-61*02 | IGHD5-24*01 | IGHJ4*02 | igk   | heavy | Yes    | pair-d1_107679-igk-107...  |

Figure 3: Example selected clonal families table.

3. **Clonal Family Tree:** Shows the phylogenetic tree alongside a sequence alignment. Colors indicate amino acid mutations relative to the naive sequence by default, or a heatmap can display contiguous per-site data. The tree and alignment support zooming and panning, as well as focusing on a subtree based on a selected subroot node.

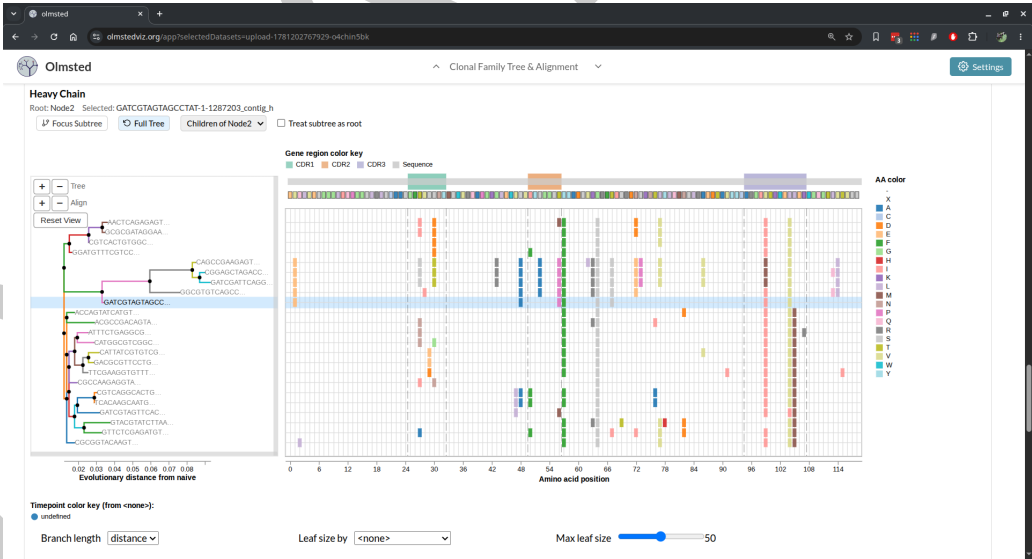


Figure 4: Example tree and alignment clonal family visualization.

4. **Ancestral Sequences:** For a selected leaf, displays the complete mutational path from the naive sequence. For this and the clonal family tree view, mutations can be colored by an arbitrary value expressed in the data.

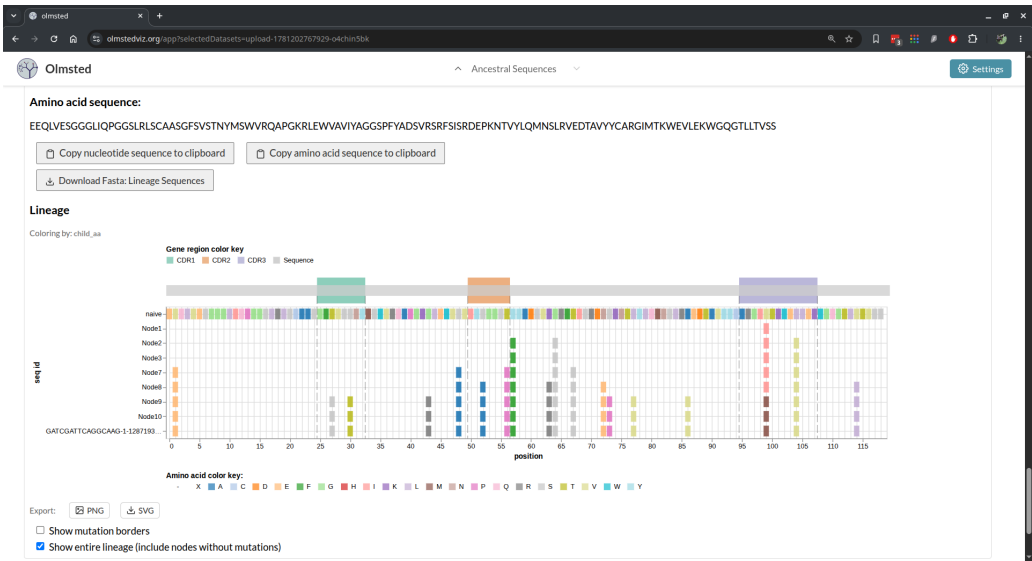


Figure 5: Example ancestral sequence visualization.

## Implementation

Olmsted is built with React and Redux, with visualizations implemented in Vega. The codebase originated in 2018 as a fork of Nextstrain's Auspice (Hadfield et al., 2018), and was actively developed through 2020 before being shelved. In 2025 the project was revived and substantially rewritten with the assistance of agentic AI coding tools (Claude Code), which were used to modernize the application's dependencies and JavaScript frameworks, replace the legacy server-side data pipeline with client-side processing and browser-based (IndexedDB) storage, and add a test suite and continuous integration. All AI-assisted changes were reviewed and tested by the authors. The application can be deployed as a static single-page application or run locally via Docker.

## Acknowledgements

We thank Trevor Bedford, James Hadfield, and other authors of Nextstrain, on which Olmsted's source code is based. We are grateful to the AIRR data representation working group for their cooperative development of the AIRR lineage schema. This work was supported by National Institutes of Health grants R01 AI146028, R01 GM113246, R01 AI120961, R01 AI138709, U19 AI117891, and U19 AI128914, and by the Howard Hughes Medical Institute.

## References

- AIRR Community. (2024). *AIRR clones and trees schema*. <https://docs.airr-community.org/>.
- Doepker, L. E., Danon, S., Harkins, E., Ralph, D. K., Yaffe, Z., Garrett, M. E., Dhar, A., Wagner, C., Stumpf, M. M., Arenz, D., Williams, J. A., Jaoko, W., Mandaliya, K., Lee, K. K., Matsen, F. A., & Overbaugh, J. M. (2021). Development of antibody-dependent cell cytotoxicity function in HIV-1 antibodies. *Elife*, 10, e63444. <https://doi.org/10.7554/eLife.63444>
- Doepker, L. E., Simonich, C. A., Ralph, D., Shipley, M. M., Garrett, M., Gobillot, T., Vigdorovich, V., Sather, D. N., Nduati, R., Matsen, F. A., & Overbaugh, J. M. (2020). Diversity and function of maternal HIV-1-specific antibodies at the time of vertical transmission. *J. Virol.*, 94(8), e01594–19. <https://doi.org/10.1128/JVI.01594-19>

- 125 Foglierini, M., Pappas, L., Lanzavecchia, A., Corti, D., & Perez, L. (2020). Ancestree: An  
 126 interactive immunoglobulin lineage tree visualizer. *PLoS Comput. Biol.*, 16(7), e1007731.  
 127 <https://doi.org/10.1371/journal.pcbi.1007731>
- 128 Hadfield, J., Megill, C., Bell, S. M., Huddleston, J., Potter, B., Callender, C., Sagulenko, P.,  
 129 Bedford, T., & Neher, R. A. (2018). Nextstrain: Real-time tracking of pathogen evolution.  
 130 *Bioinformatics*, 34(23), 4121–4123. <https://doi.org/10.1093/bioinformatics/bty407>
- 131 Jussset, L., Abdollahi, N., Verny, T., Armand, M., De Septenville, A. L., Davi, F., & Bernardes,  
 132 J. S. (2023). ViCloD, an interactive web tool for visualizing B cell repertoires and analyzing  
 133 intracolon diversities: Application to human B-cell tumors. *NAR Genom. Bioinform.*, 5(2),  
 134 lqad064. <https://doi.org/10.1093/nargab/lqad064>
- 135 Rosenfeld, A. M., Meng, W., Luning Prak, E. T., & Hershberg, U. (2016). ImmuneDB: A system  
 136 for the analysis and exploration of high-throughput adaptive immune receptor sequencing  
 137 data. *Bioinformatics*, 33(2), 292–293. <https://doi.org/10.1093/bioinformatics/btw593>
- 138 Rubelt, F., Busse, C. E., Bukhari, S. A. C., Bürckert, J.-P., Mariotti-Ferrandiz, E., Cowell, L. G.,  
 139 Watson, C. T., Marthandan, N., Faison, W. J., Hershberg, U., Laserson, U., Corrie, B. D.,  
 140 Davis, M. M., Peters, B., Lefranc, M.-P., Scott, J. K., Breden, F., AIRR Community, Luning  
 141 Prak, E. T., & Kleinstein, S. H. (2017). Adaptive immune receptor repertoire community  
 142 recommendations for sharing immune-repertoire sequencing data. *Nature Immunology*,  
 143 18(12), 1274–1278. <https://doi.org/10.1038/ni.3873>
- 144 Simonich, C. A., Doecker, L., Ralph, D., Williams, J. A., Dhar, A., Yaffe, Z., Gentles, L., Small,  
 145 C. T., Oliver, B., Vigdorovich, V., Mangala Prasad, V., Nduati, R., Sather, D. N., Lee,  
 146 K. K., Matsen, F. A., & Overbaugh, J. (2019). Kappa chain maturation helps drive rapid  
 147 development of an infant HIV-1 broadly neutralizing antibody lineage. *Nat. Commun.*,  
 148 10(1), 2190. <https://doi.org/10.1038/s41467-019-09481-7>
- 149 Vander Heiden, J. A., Marquez, S., Marthandan, N., Bukhari, S. A. C., Busse, C. E., Corrie,  
 150 B., Hershberg, U., Kleinstein, S. H., Matsen IV, F. A., Ralph, D. K., Rosenfeld, A. M.,  
 151 Schramm, C. A., AIRR Community, Christley, S., & Laserson, U. (2018). AIRR community  
 152 standardized representations for annotated immune repertoires. *Frontiers in Immunology*,  
 153 9, 2206. <https://doi.org/10.3389/fimmu.2018.02206>
- 154 Waltari, E., Nafees, S., McCutcheon, K. M., Wong, J., & Pak, J. E. (2022). AIRRscope: An  
 155 interactive tool for exploring B-cell receptor repertoires and antibody responses. *PLoS  
 156 Comput. Biol.*, 18(9), e1010052. <https://doi.org/10.1371/journal.pcbi.1010052>
- 157 Williams, K. L., Wang, B., Arenz, D., Williams, J. A., Dingens, A. S., Cortez, V., Simonich, C.  
 158 A., Rainwater, S., Lehman, D. A., Lee, K. K., & Overbaugh, J. (2018). Superinfection  
 159 drives HIV neutralizing antibody responses from several B cell lineages that contribute to a  
 160 polyclonal repertoire. *Cell Rep.*, 23(3), 682–691. <https://doi.org/10.1016/j.celrep.2018.03.082>