

# Happywhale - Whale and Dolphin Identification

Matthew Harding

April 2024

## 1 Introduction

This project explores the problem of classifying images of dolphin and whales to identify individuals. This work is based on the *Happywhale - Whale and Dolphin Identification* Kaggle competition.

Data for this competition contains images of over 15,000 unique individual marine mammals from 30 different species collected from 28 different research organizations. Individuals have been manually identified and given an individual\_id by marine researches.

Unlike a typical classification problem in which there is a fixed set of classes which examples of all classes within the training data, this problem required the ability to classify individuals not contained within the training dataset.

## 2 Training Data

Within the training data there are 51,033 labelled images. Looking at the histogram of species Figure 1, there is a clear imbalance in the number of iamges per species with the vast majority of labelled images being for bottlenose dolphins, beluga whales, humpback whales and blue whales. For some species the number of examples it so low it will be difficult to gain a high level of accuracy within classification.

Look at Figure 2, the mean count of images per individual by species we see another imbalance with some species on average containing a large number of images per indivudal whilst others only contain one or two images per individual.

Given these issues with the dataset combined in compute limitations, it was decided to limit the task to building a classify for bottlenose dolphins, a species for which there were a large number of labelled images and for which there were on average a large number of images per individual. By doing this, the total training dataset was reduced to 9664 images across 613 individuals.

## 3 Image Preprocessing

The training images for the bottlenose dolphins came in a variety of sizes. Figure ?? shows an example unprocessed image. Large amounts of each image are just

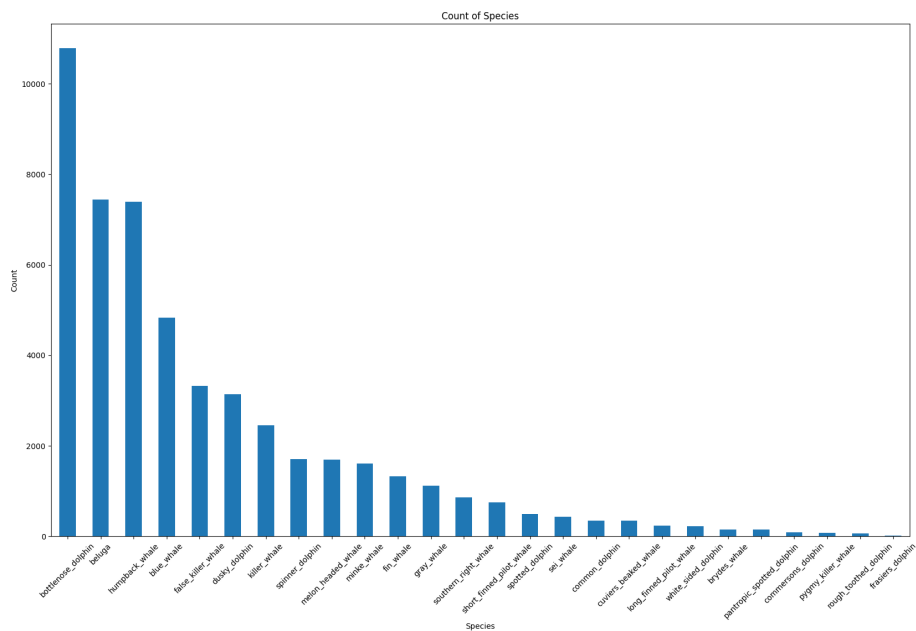


Figure 1: Number of training images per species

of water which is irrelevant to the classification task. We are only interested in the parts of the images that contain the animals.

A solution to this issue was proposed within the discussions of the Kaggle competition. YoloV5 was trained on a dataset of 1200 pictures of whale flukes and the corresponding location of points on the edge of the fluke for those pictures.

<https://www.kaggle.com/datasets/martinpiotte/humpback-whale-identification-fluke-location>  
<https://www.kaggle.com/code/awsaf49/happywhale-cropped-data-prepare-yolov5>

## 4 Naive Classifier

The first approach taken was to classify images

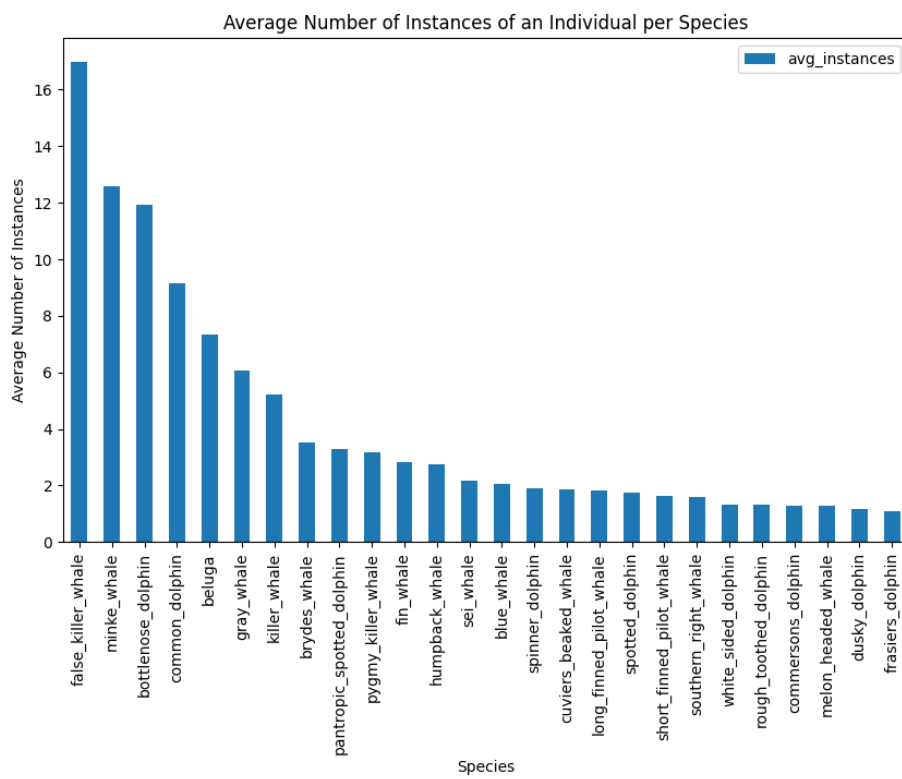


Figure 2: Mean count of images per individual by species



Figure 3: Example image of a bottlenose dolphin