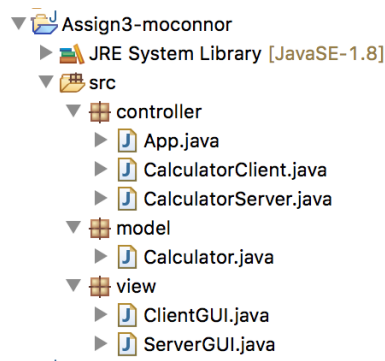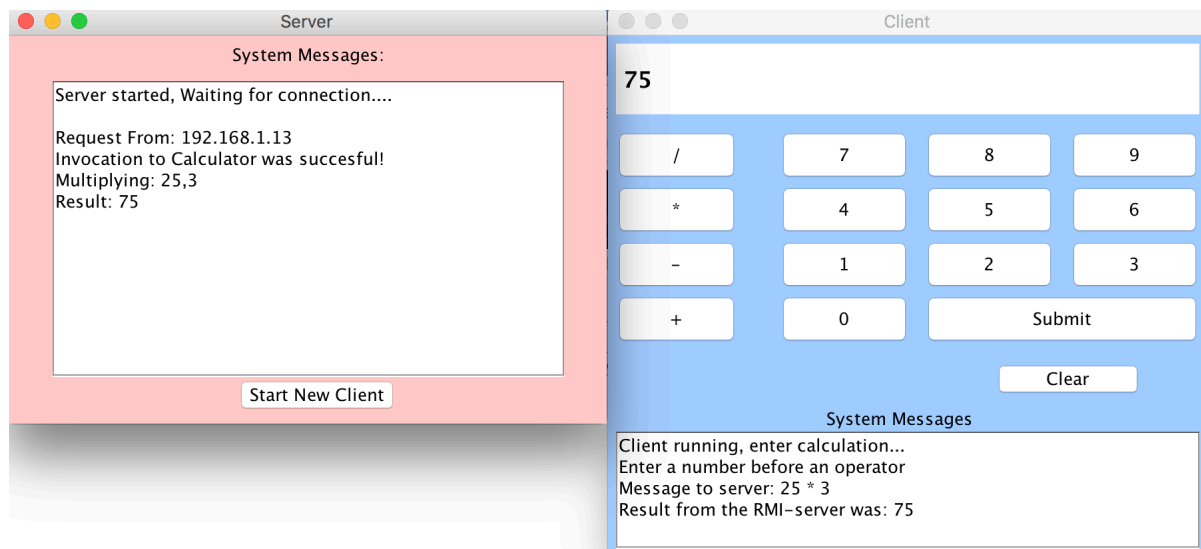Matthew O'Connor
BSc Applied Computing
Distributed Systems
Assignment 3 RMI calculator

MVC approach used for project layout.

App.java will run the server and one client window. Additional Clients can be launched using the 'Start New Client' button in the server GUI.
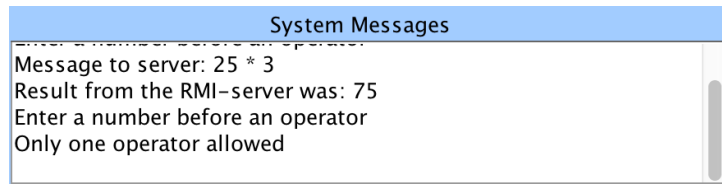

Complete input validation with appropriate system messages displayed on both client and server.

7 numbers before operator and 7 after operator are allowed e.g.

1111111+2222222

Client window can be closed without affecting the server. Closing server window will end the application.

Appropriate messages displayed in window if user tries to use 2 operators or doesn't provide correct input

Clear button provided.

Hosted on github: https://github.com/matt-oc/Assign3-RMI