


- 1) Originally the myqueue and mystack wouldn't instantiate as intended. I had to go through and see what was going on with the constructor to get them to properly do so.

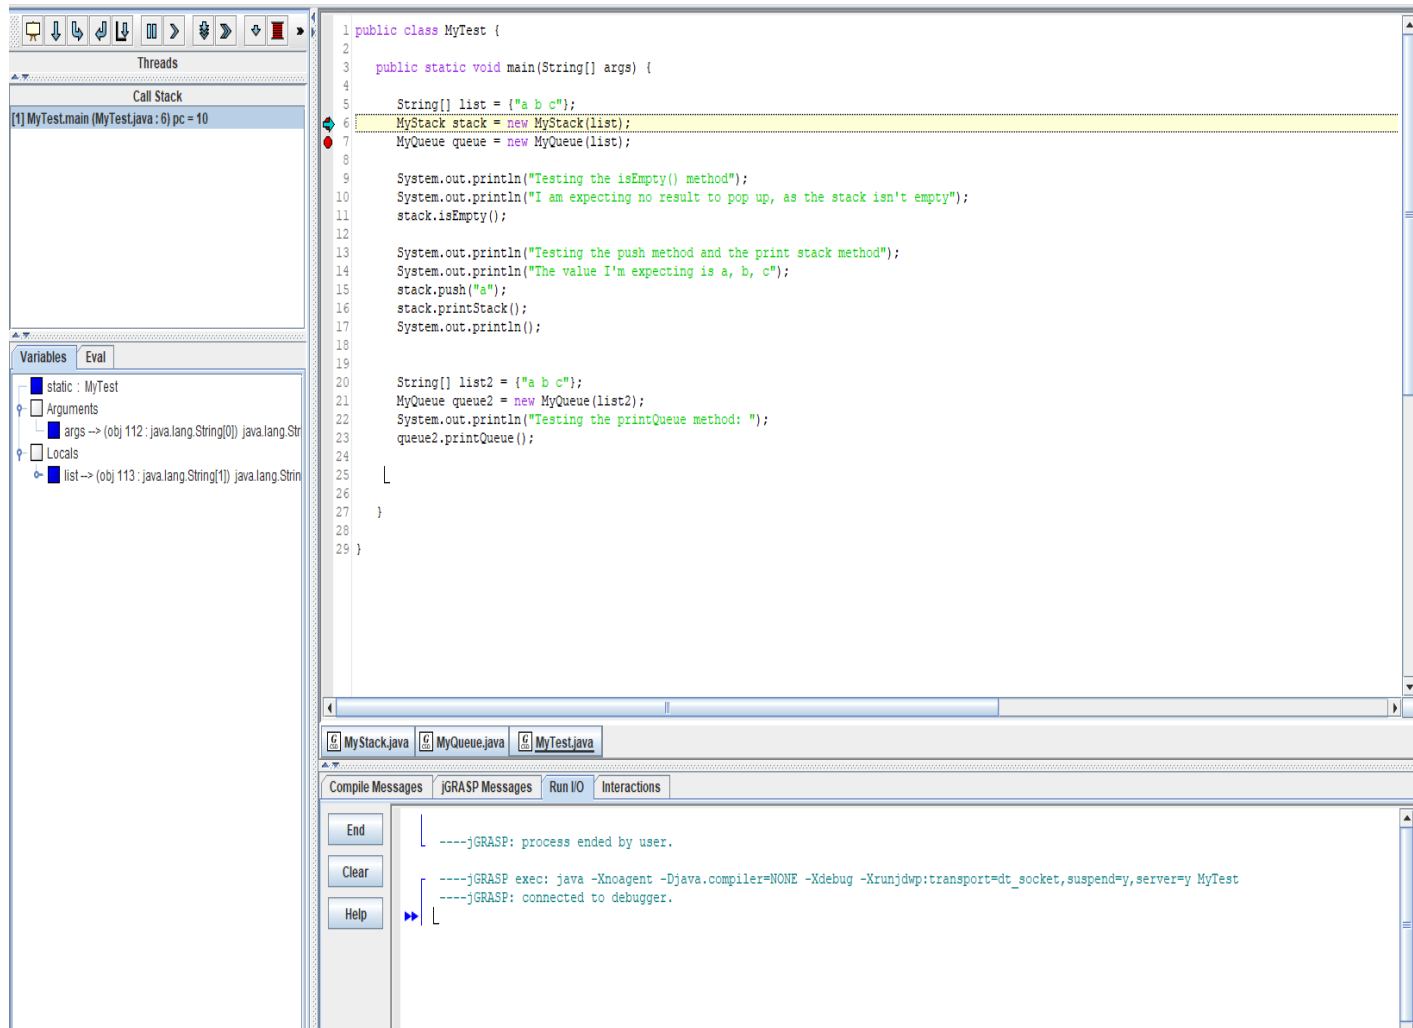

- 2) The BigO for `MyStack push()` will be $O(n)$, as it will only take n iteration(s) to push whatever item you're adding to the stack.
- 3) The BigO for `MyQueue dequeue` will also be $O(n)$ as it will take n iterations to dequeue the data
- 4) The space complexity will also be $O(n)$;

```
----jGRASP exec: java MyTest
Testing the isEmpty() method
I am expecting no result to pop up, as the stack isn't empty
Testing the push method and the print stack method
The value I'm expecting is a, b, c
aa b c
Testing the printQueue method:
a b c
----jGRASP: operation complete.
```

▶ L