



(a) CIFAR-10 vs CIFAR-100: the featuriser ladder, 200 repeats per cell

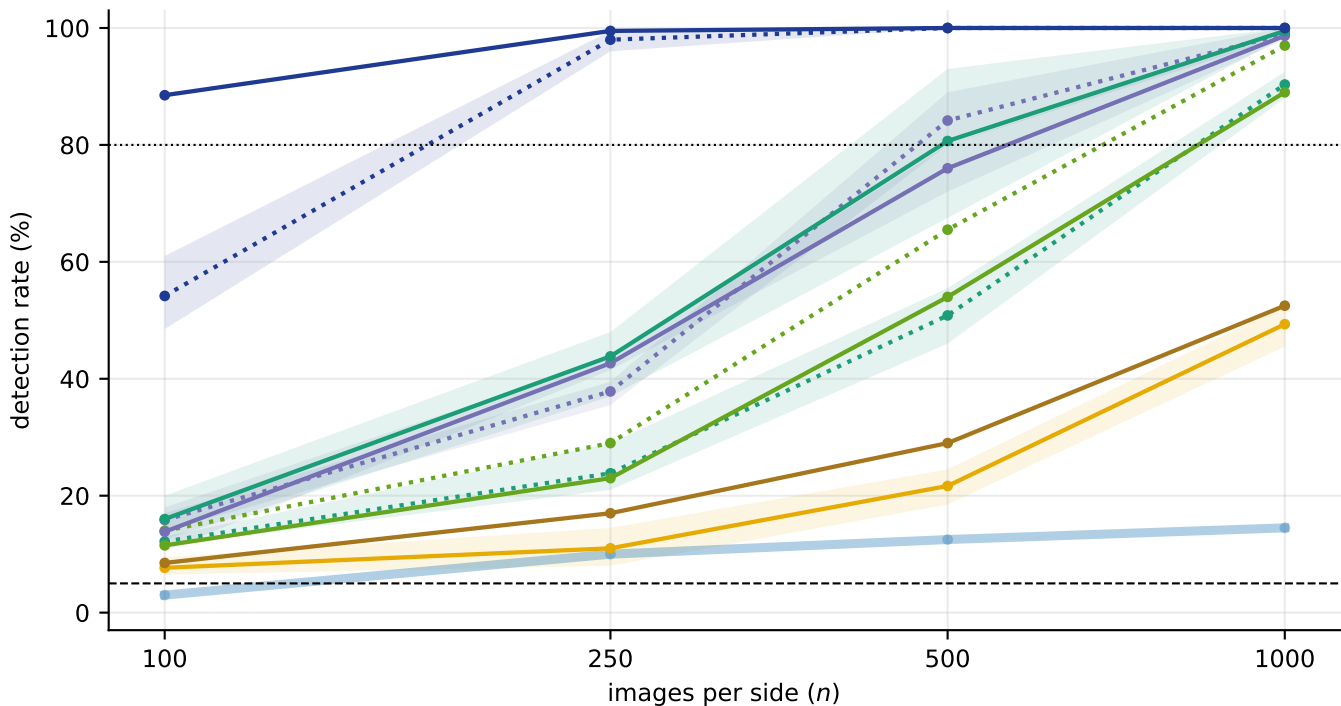

- 6m ImageNet ResNet-18 (64 ch)
- 6 ImageNet ResNet-18 (512)
- 3 untrained AE (occupancy)
- 5m untrained ResNet-18 (64 ch)
- 5 untrained ResNet-18 (512)
- 4q natural AE mse-2 (activation)
- 4 natural AE mse-2 (occupancy)
- 3q untrained AE (activation)
- 1 colour moments
- 2 random pixel projection
- ref JPEG bytes (scalar KS)

(b) drop 1 of 10 classes, $n = 2000$
bar = $k = 9$, tick = $k = 10$ null

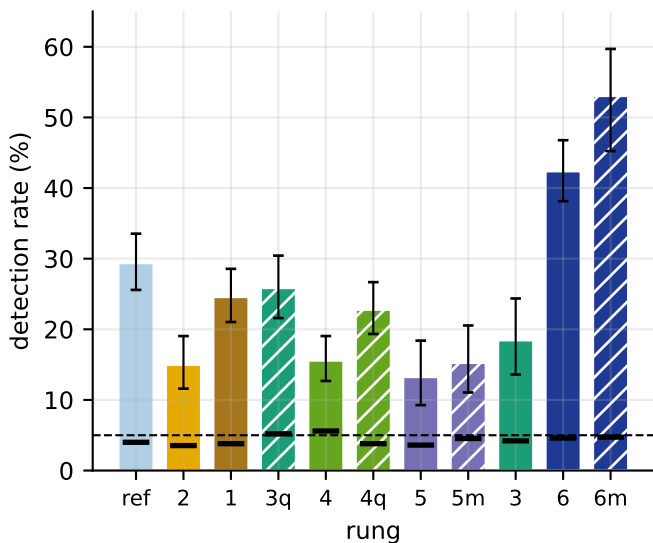

(c) calibration: redrawn null, $n = 1000$
1000 repeats per featuriser

