
UML class diagram

Static methods/classes are underlined

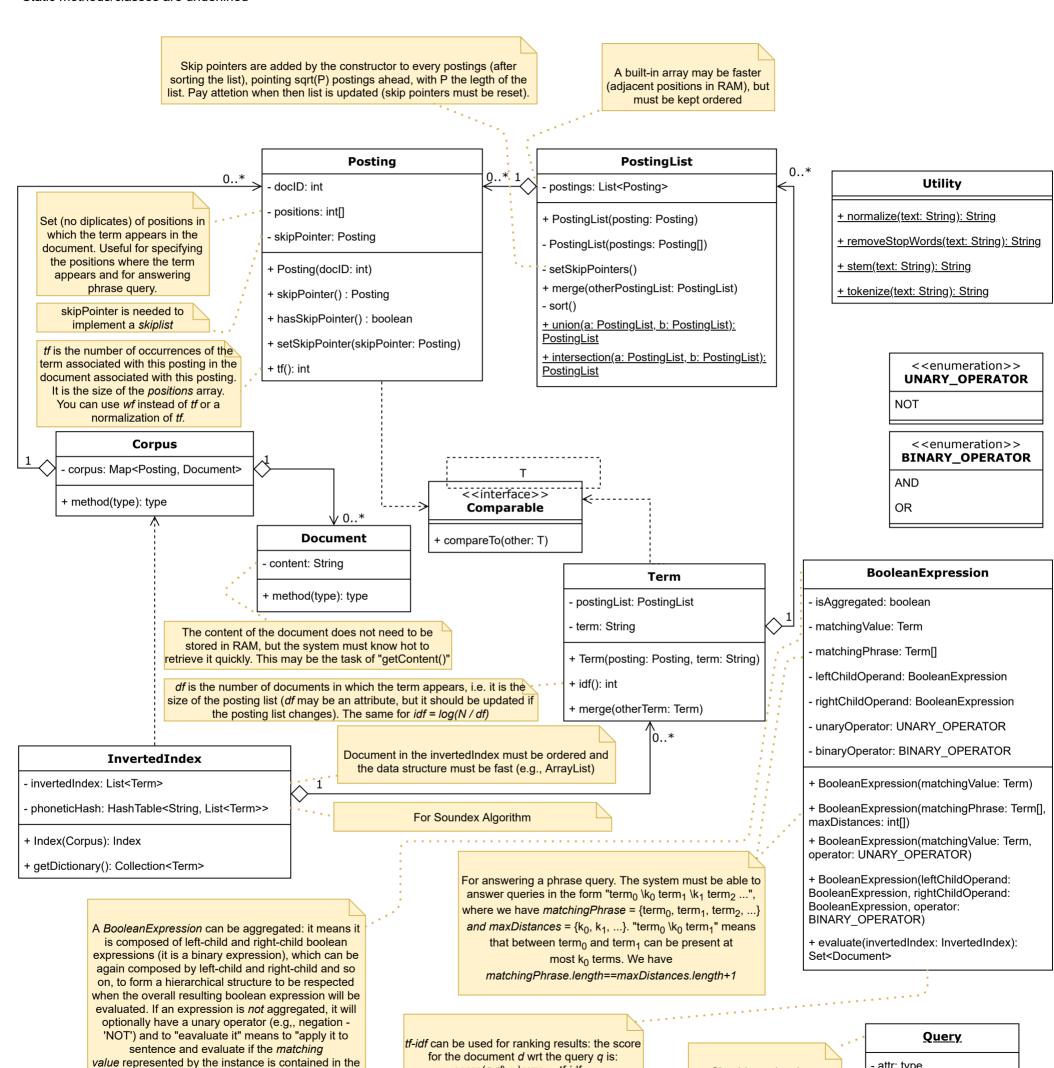

 $score(q,d) = sum_{t \in q} tf-idf_{t,d}$

sentence to which it is applied". If the instance is

not aggregated, it cannot have a binary operator.

- attr: type

+ method(type): type

Should use the class

BooleanExpression, so ... is

the class Query needed?