

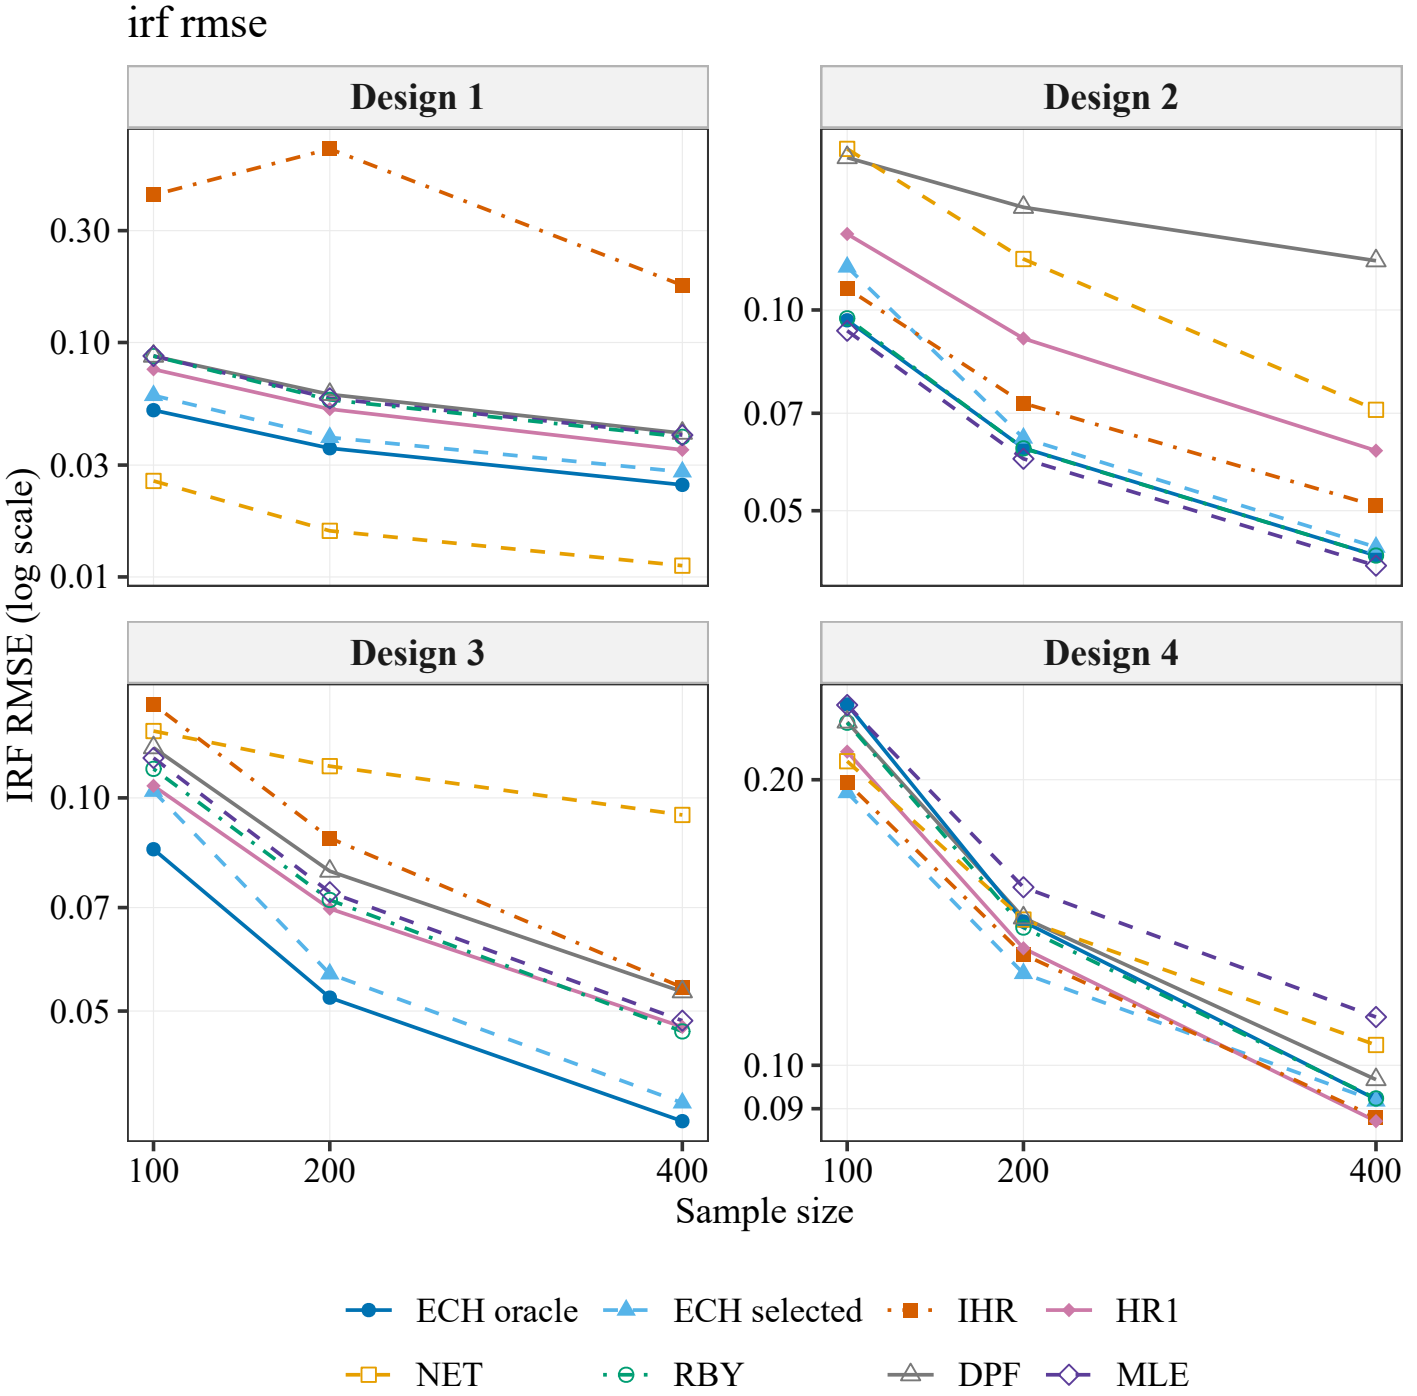


Reduced-form IRF accuracy, pooling lags 1-5 and all matrix entries within each replication before averaging losses across replications. All usable estimates are included, even when nonconverged or unstable. Accuracy is conditional on usable outputs; consult usable counts and diagnostics. Vertical axes are logarithmic and vary by design; exact zeros appear only in the tables. Lines connect simulated points without a fitted convergence rate.

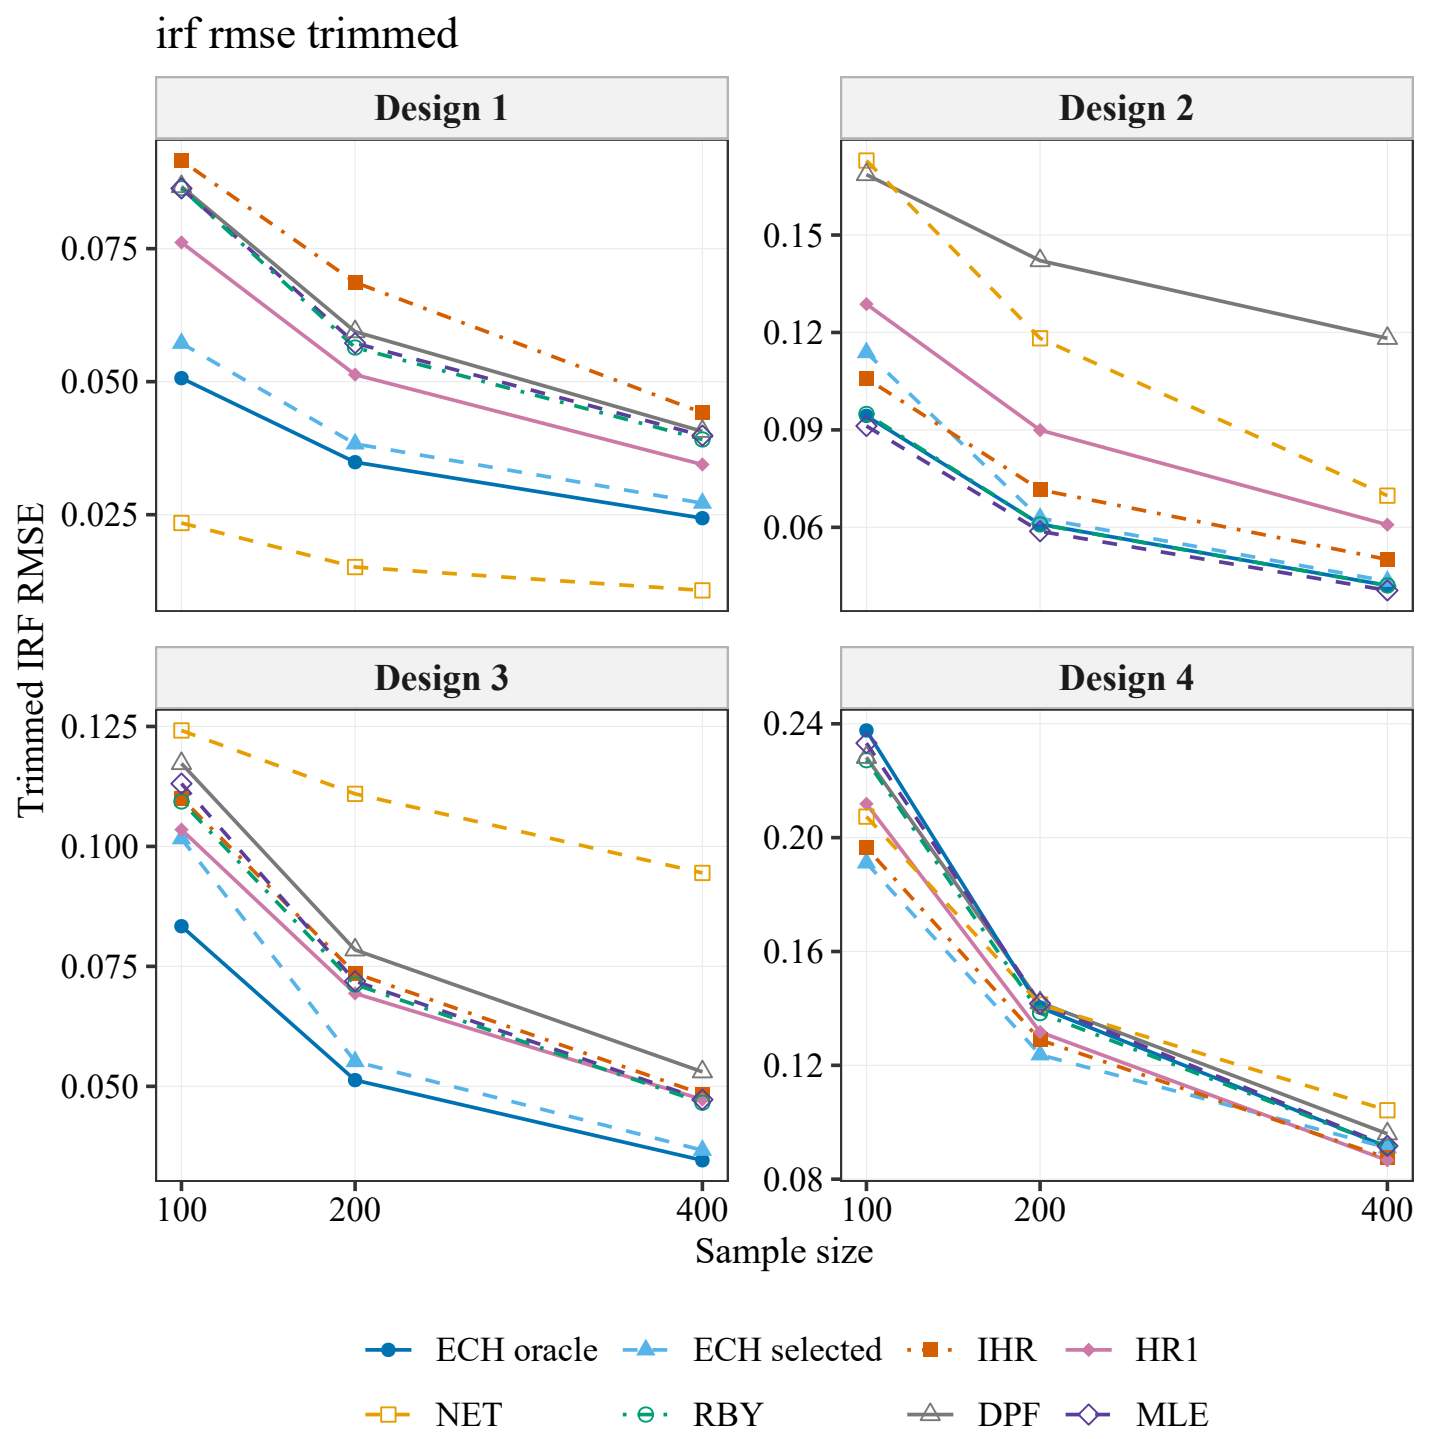


Reduced-form IRF accuracy. The trimmed statistic removes 1% of replication losses from EACH tail before averaging and taking the square root; it is not ordinary RMSE. All usable estimates are included, even when nonconverged or unstable. Accuracy is conditional on usable outputs; consult usable counts and diagnostics. Vertical axes vary by design. Lines connect simulated points.

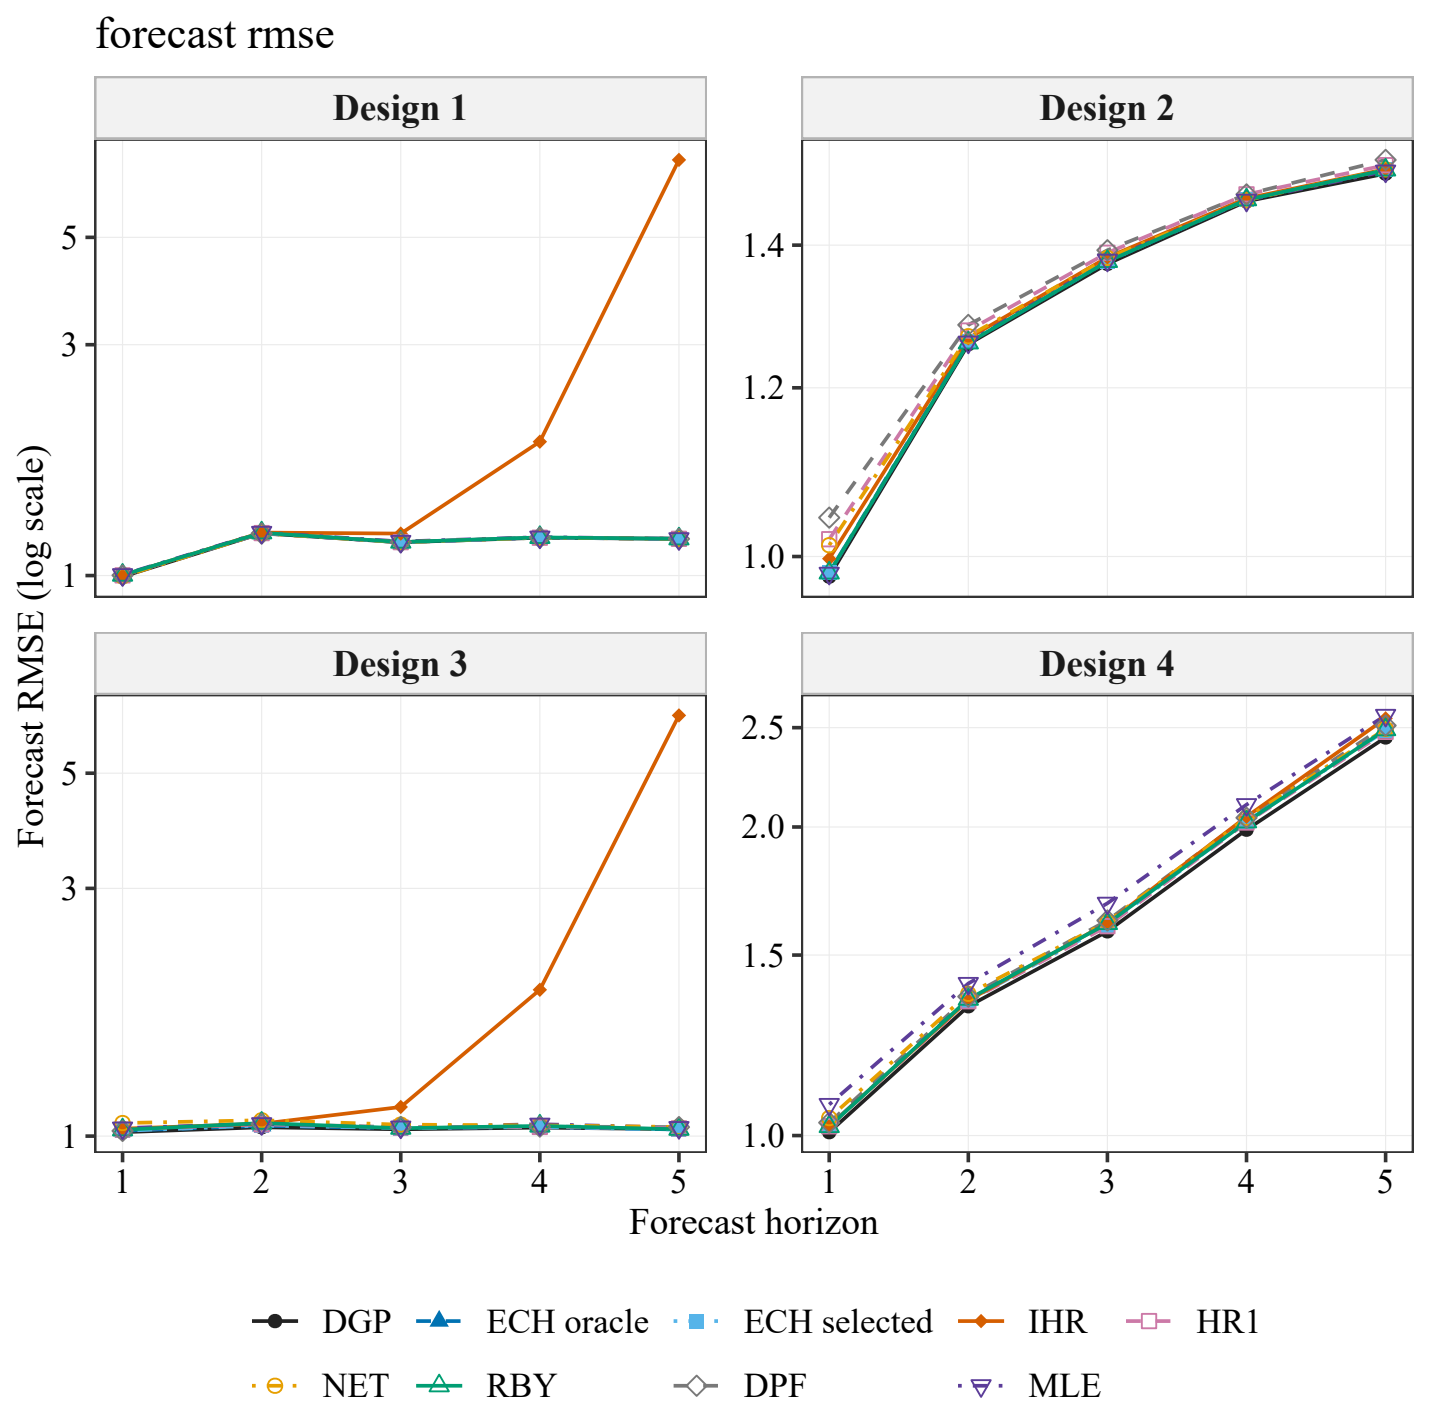


Forecast accuracy at n = 400. Variables are pooled within replication. DGP uses the true parameters with the same observed training history. All usable estimates are included, even when nonconverged or unstable. Accuracy is conditional on usable outputs; consult usable counts and diagnostics. Vertical axes are logarithmic and vary by design; exact zeros appear only in the tables. Lines connect simulated points without a fitted convergence rate.

forecast relative rmse

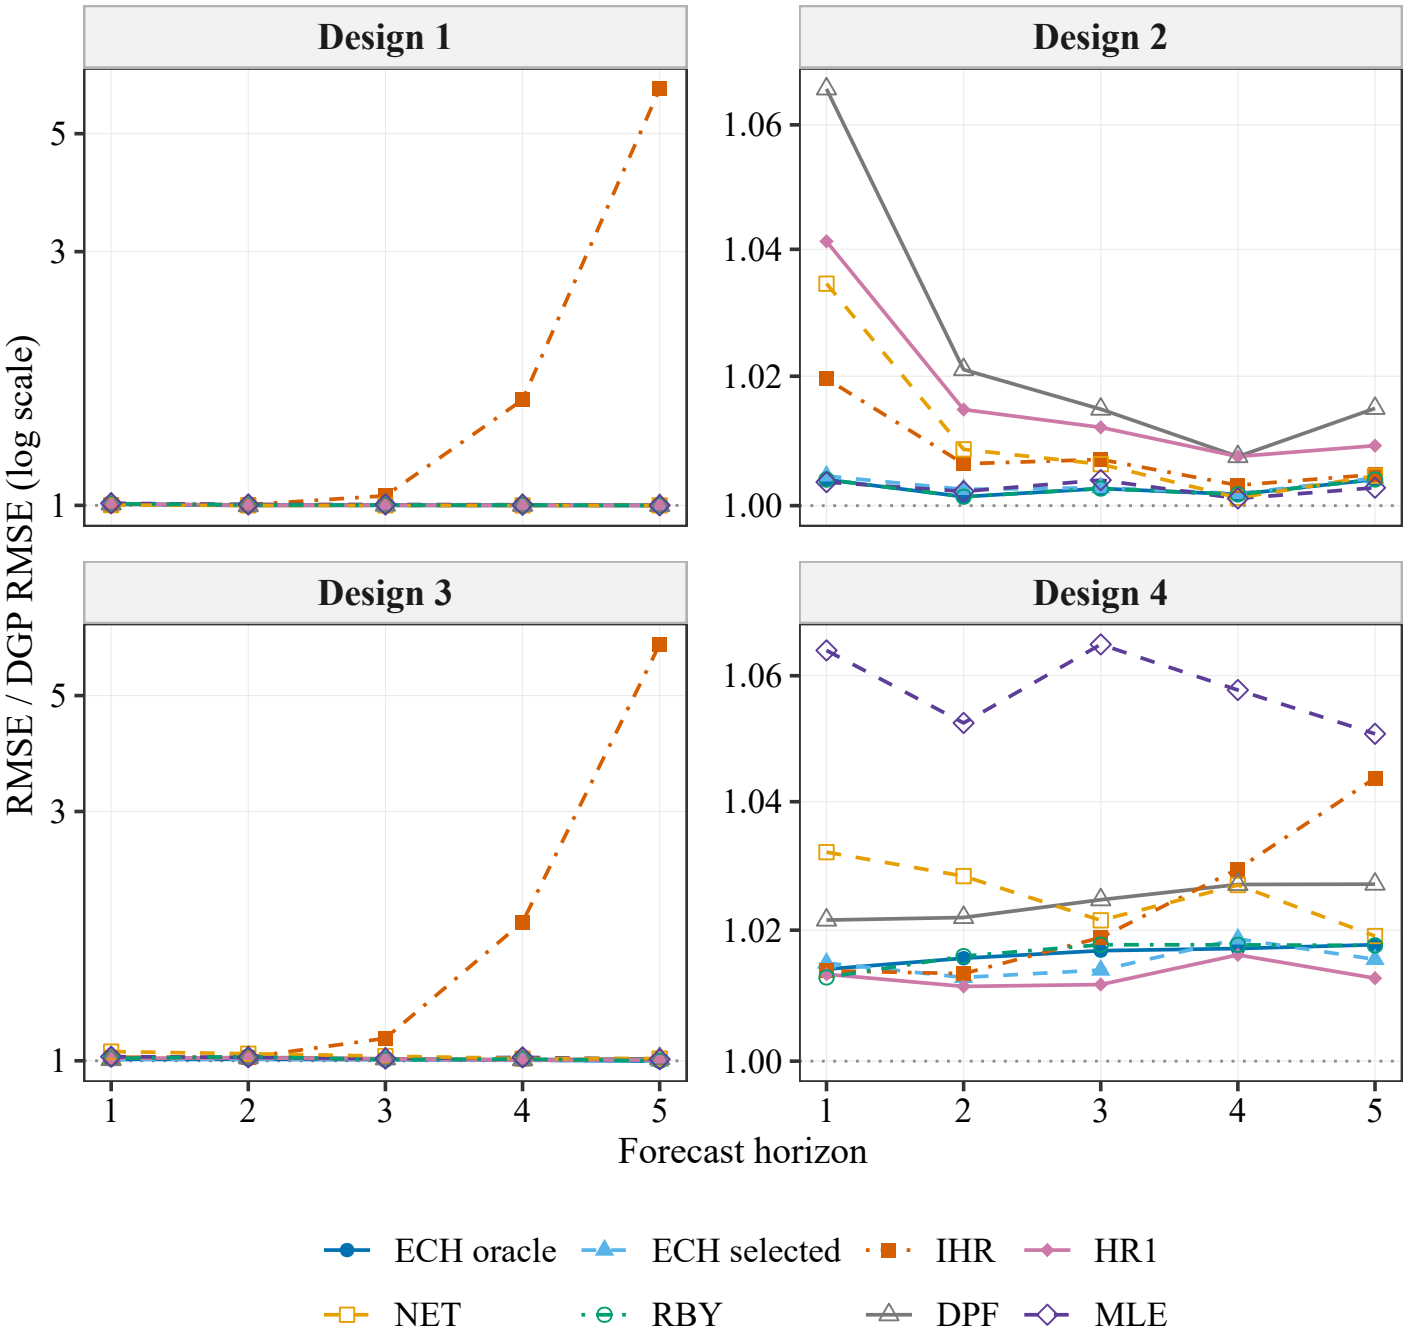


Forecast accuracy relative to DGP at n = 400. Each ratio divides two RMSEs computed on the same usable replications; it is not the mean of replication-wise ratios. The dotted line is one. All usable estimates are included, even when nonconverged or unstable. Accuracy is conditional on usable outputs; consult usable counts and diagnostics. Vertical axes are logarithmic and vary by design; exact zeros appear only in the tables. Lines connect simulated points without a fitted convergence rate.

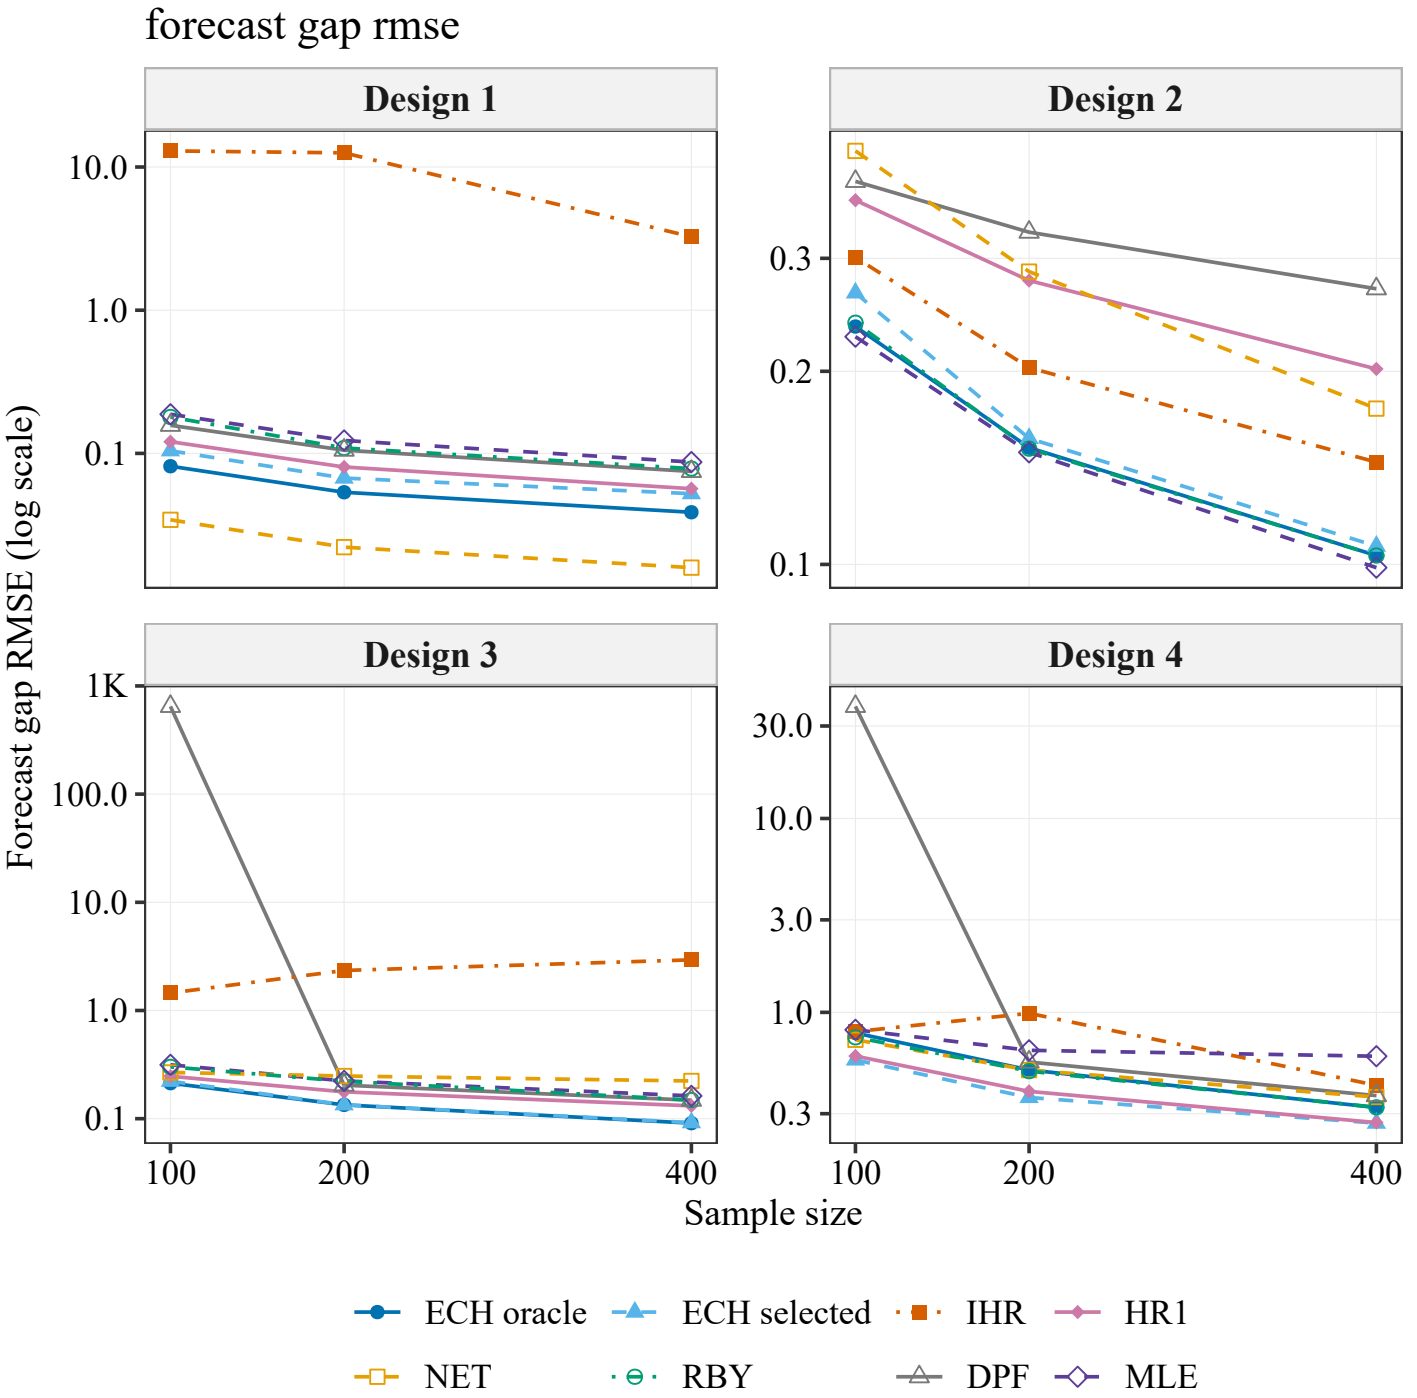

Distance from the DGP conditional forecast, pooling all horizons and variables within replication. This excludes the realized future shock contribution. All usable estimates are included, even when nonconverged or unstable. Accuracy is conditional on usable outputs; consult usable counts and diagnostics. Vertical axes are logarithmic and vary by design; exact zeros appear only in the tables. Lines connect simulated points without a fitted convergence rate.

fit time

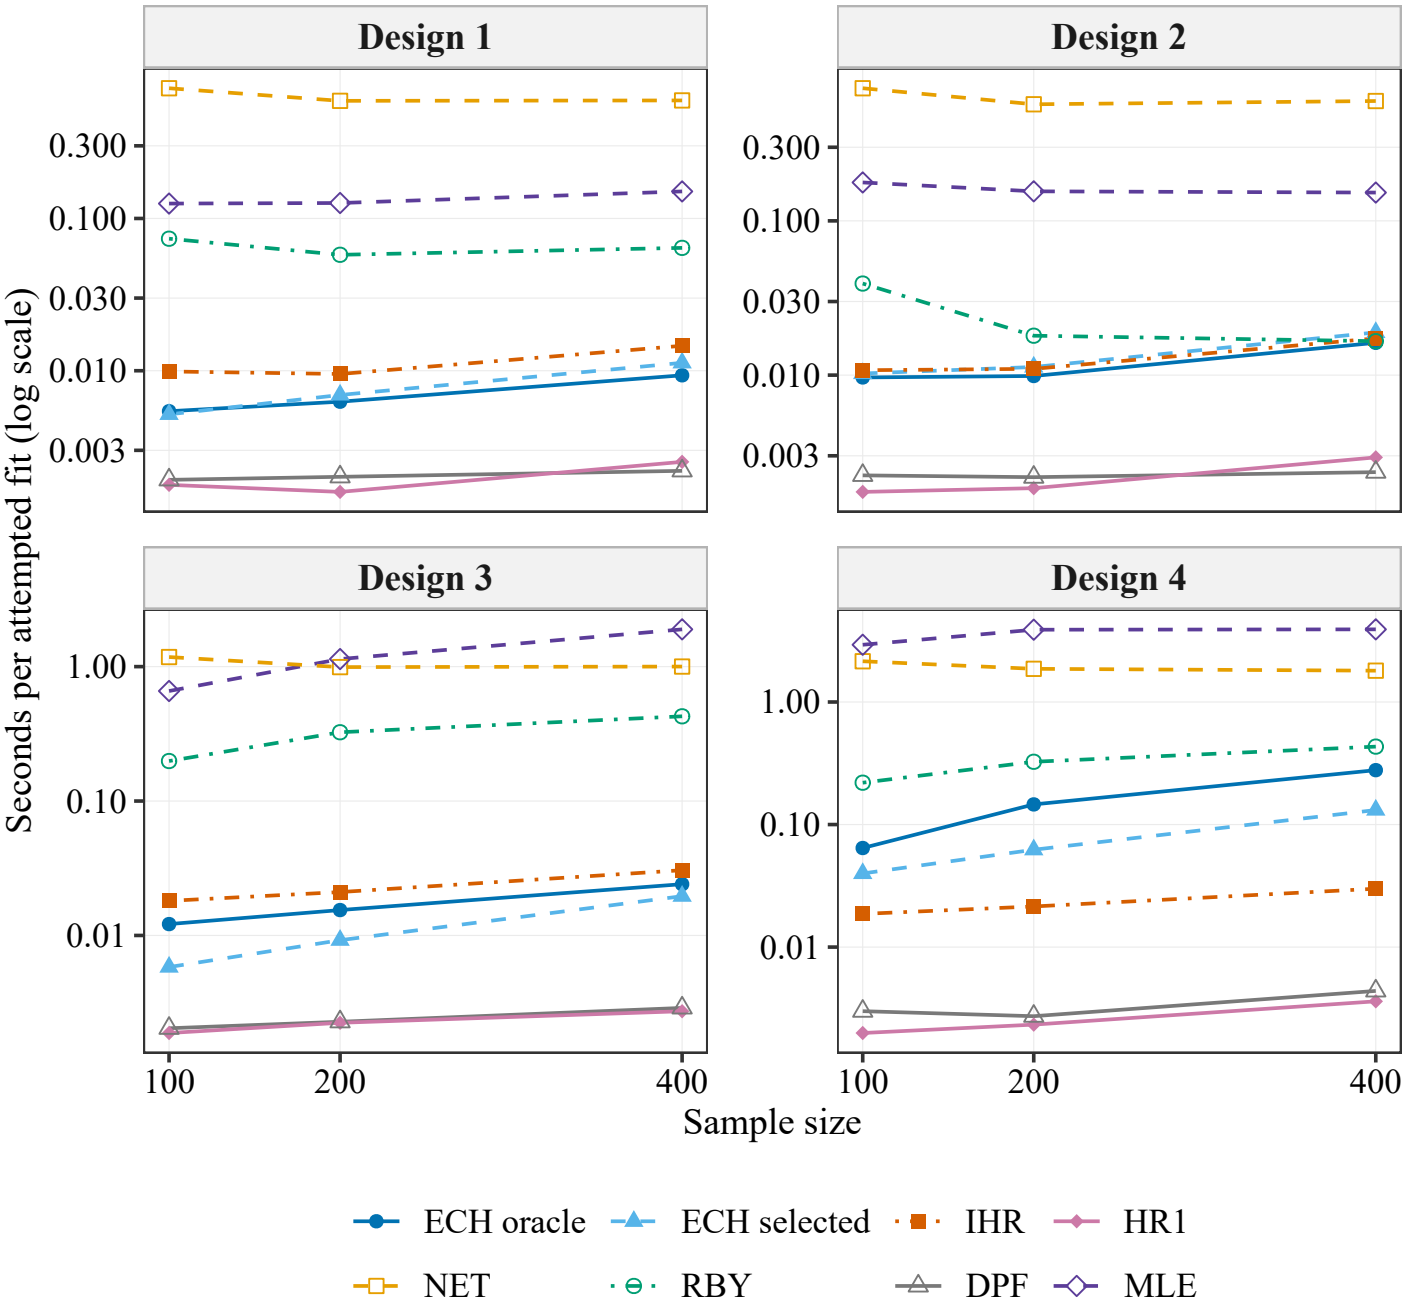

Mean elapsed estimation time, including failed attempts, measured inside the simulation workers. All attempts are used irrespective of the accuracy subset. Worker times do not measure overall wall-clock time. All usable estimates are included, even when nonconverged or unstable. Accuracy is conditional on usable outputs; consult usable counts and diagnostics. Vertical axes are logarithmic and vary by design; exact zeros appear only in the tables. Lines connect simulated points without a fitted convergence rate.