

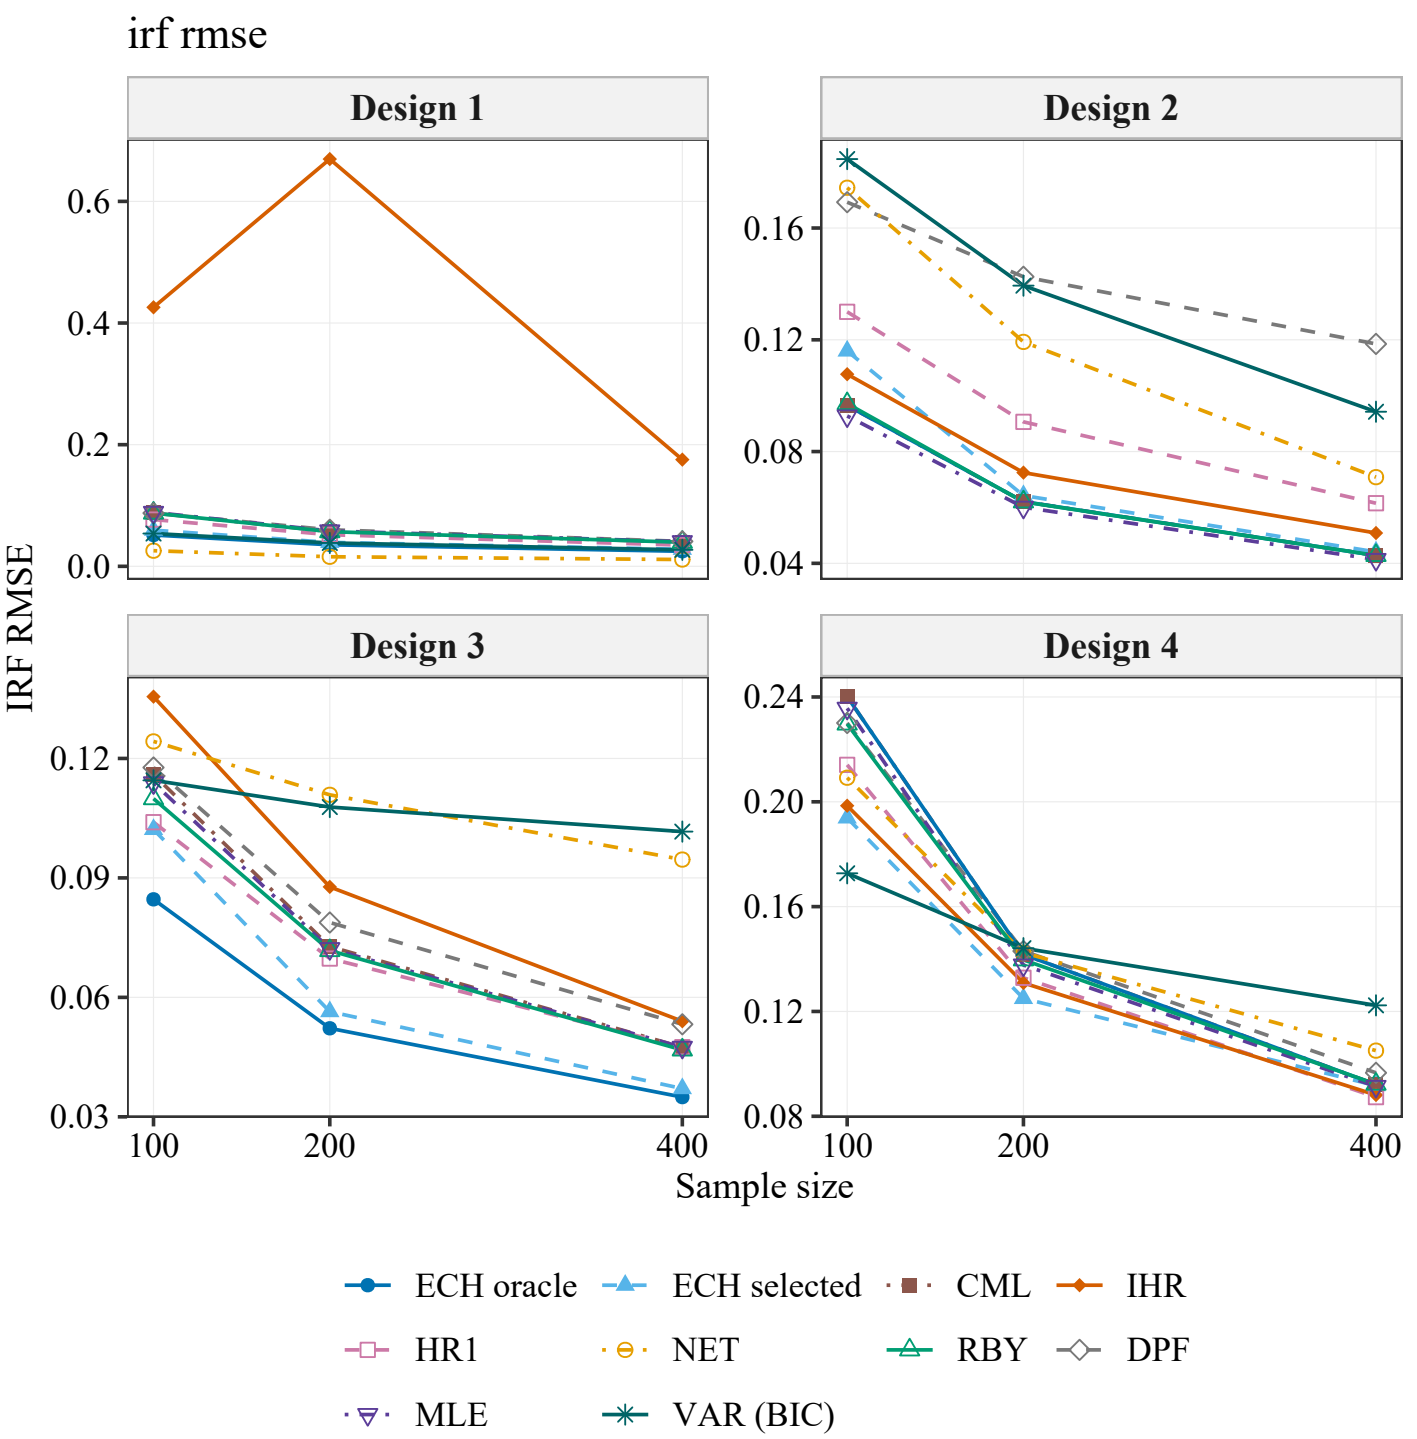


Reduced-form IRF accuracy, pooling lags 1-5 and all matrix entries within each replication before averaging losses across replications. Linear vertical scale. Full sample: all usable estimates are included, even when nonconverged, unstable or noninvertible. Accuracy is conditional on usable outputs; consult usable counts and diagnostics. Vertical axes vary by design. Lines connect simulated points.

irf rmse trimmed

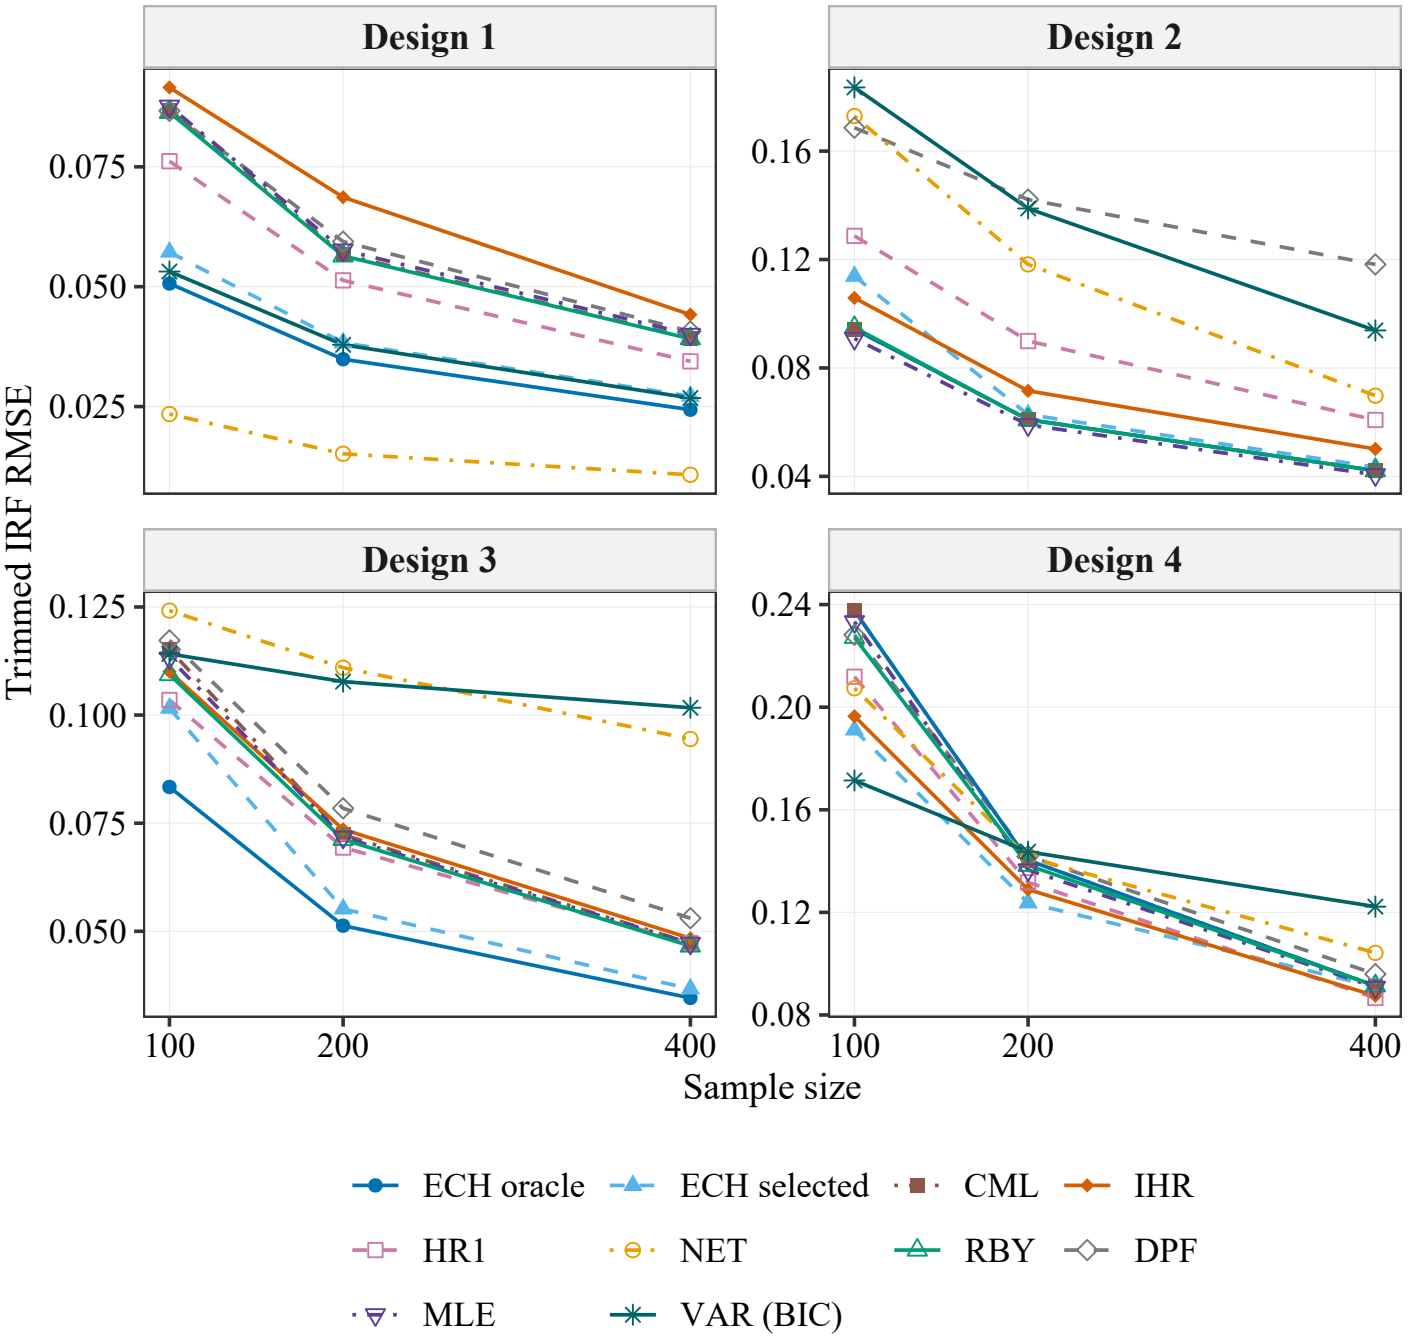


Reduced-form IRF accuracy. Trimming removes floor(0.01 times B) replication losses from EACH tail, where B is the number of finite losses, before averaging and taking the square root. Losses are ranked separately for each method, sample size, design and accuracy measure. Full sample: all usable estimates are included, even when nonconverged, unstable or noninvertible. Accuracy is conditional on usable outputs; consult usable counts and diagnostics. Vertical axes vary by design. Lines connect simulated points.

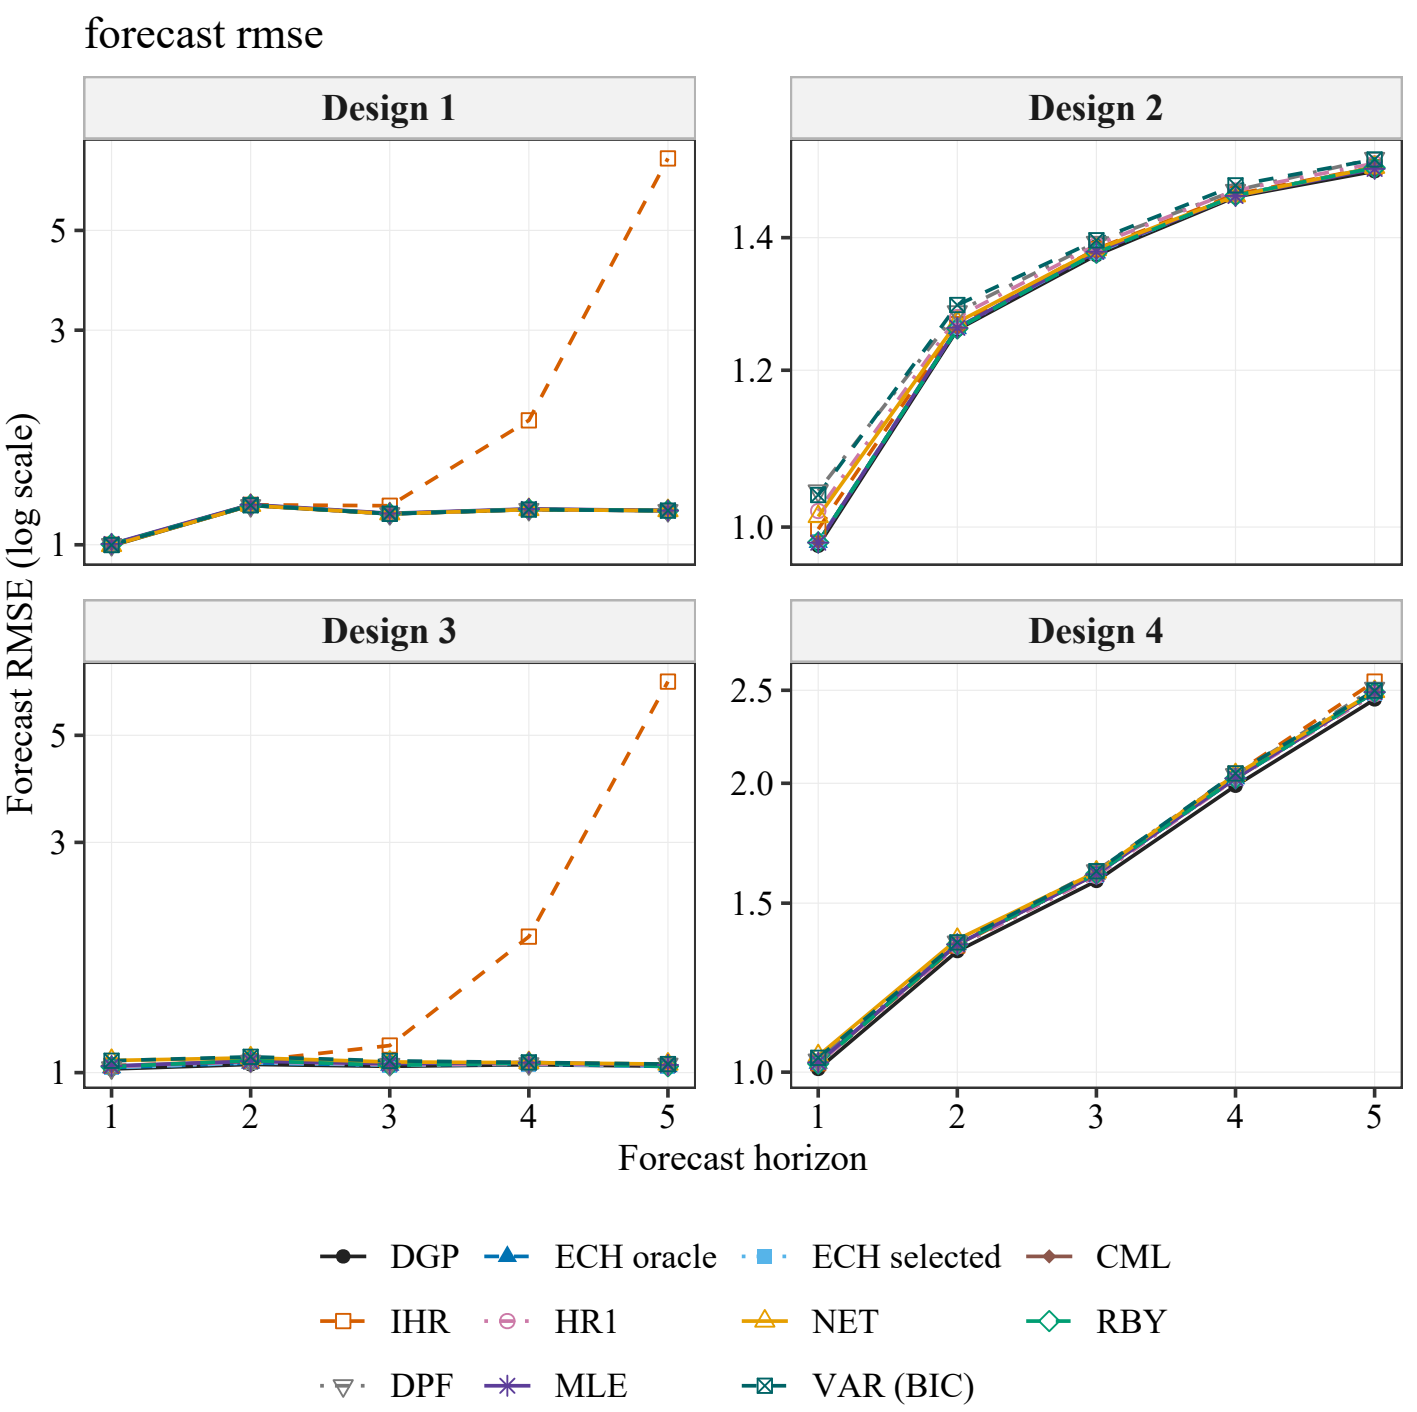


Forecast accuracy at n = 400. Variables are pooled within replication. DGP uses the true parameters with the same observed training history. Full sample: all usable estimates are included, even when nonconverged, unstable or noninvertible. Accuracy is conditional on usable outputs; consult usable counts and diagnostics. Vertical axes are logarithmic and vary by design; exact zeros appear only in the tables. Lines connect simulated points without a fitted convergence rate.

forecast relative rmse

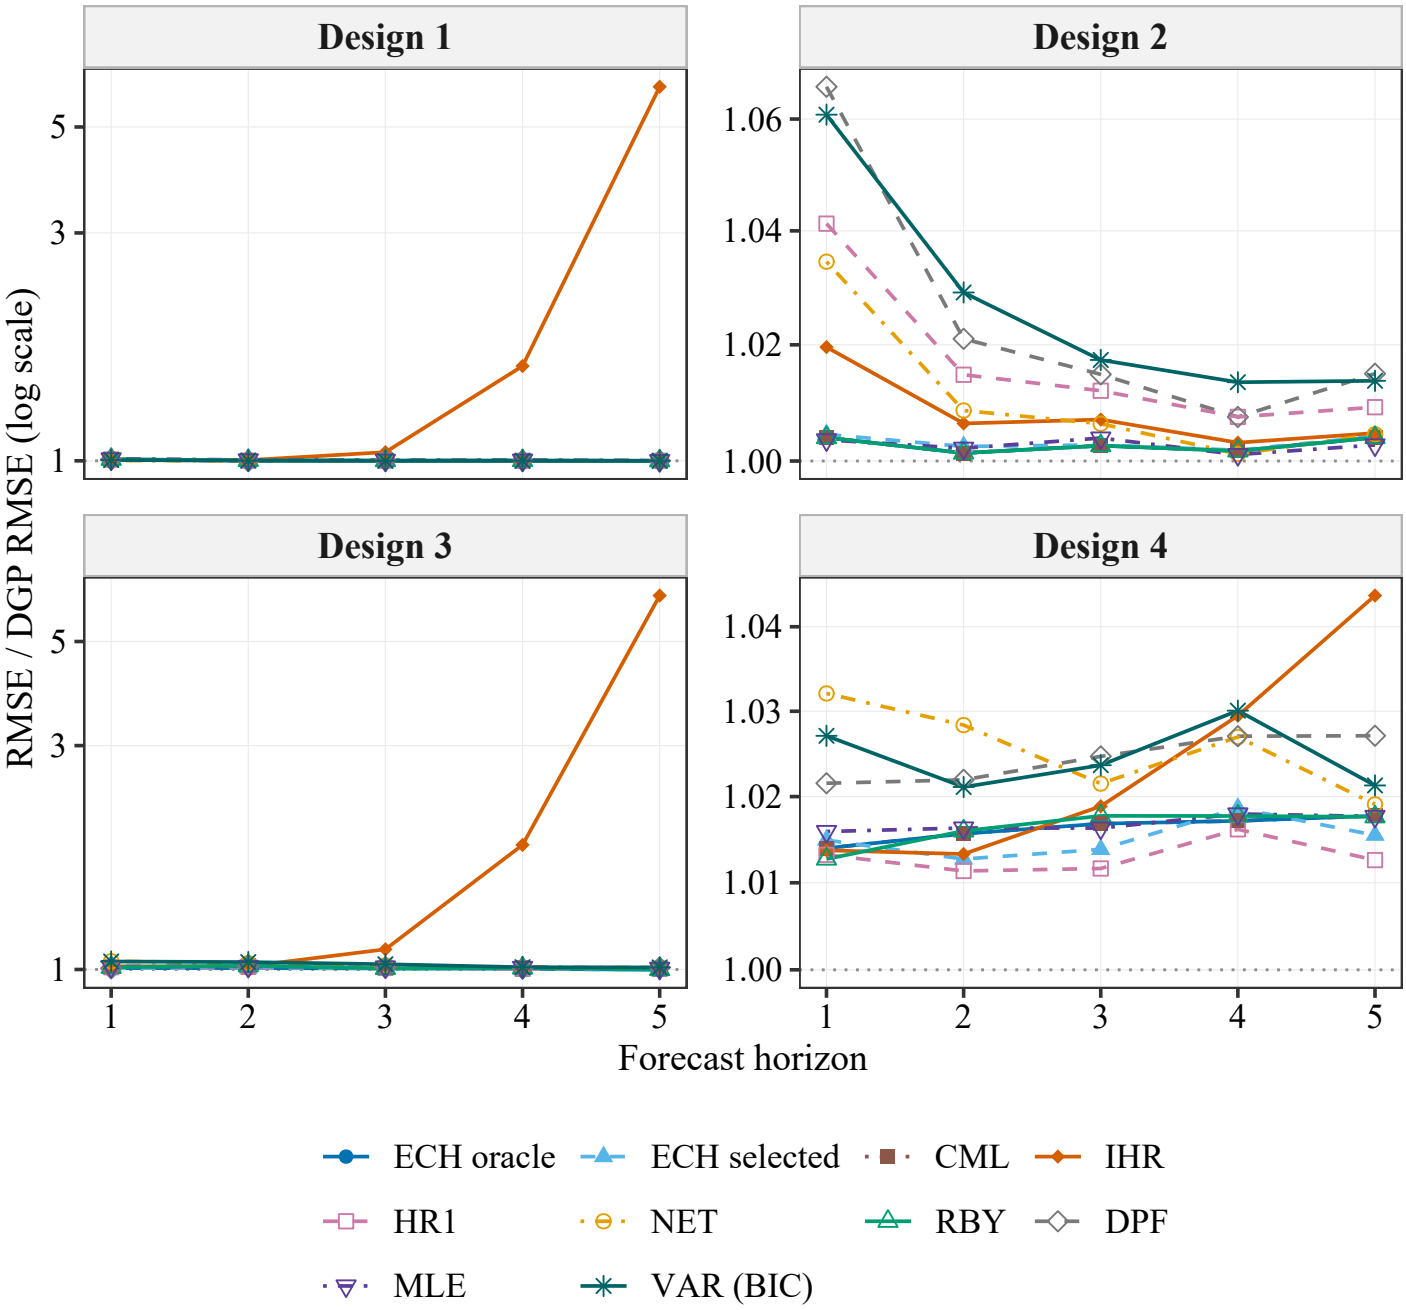


Forecast accuracy relative to DGP at n = 400. Each ratio divides two RMSEs computed on the same usable replications; it is not the mean of replication-wise ratios. The dotted line is one. Ratios use common usable replications for each estimator and DGP. Full sample: all usable estimates are included, even when nonconverged, unstable or noninvertible. Accuracy is conditional on usable outputs; consult usable counts and diagnostics. Vertical axes are logarithmic and vary by design; exact zeros appear only in the tables. Lines connect simulated points without a fitted convergence rate.

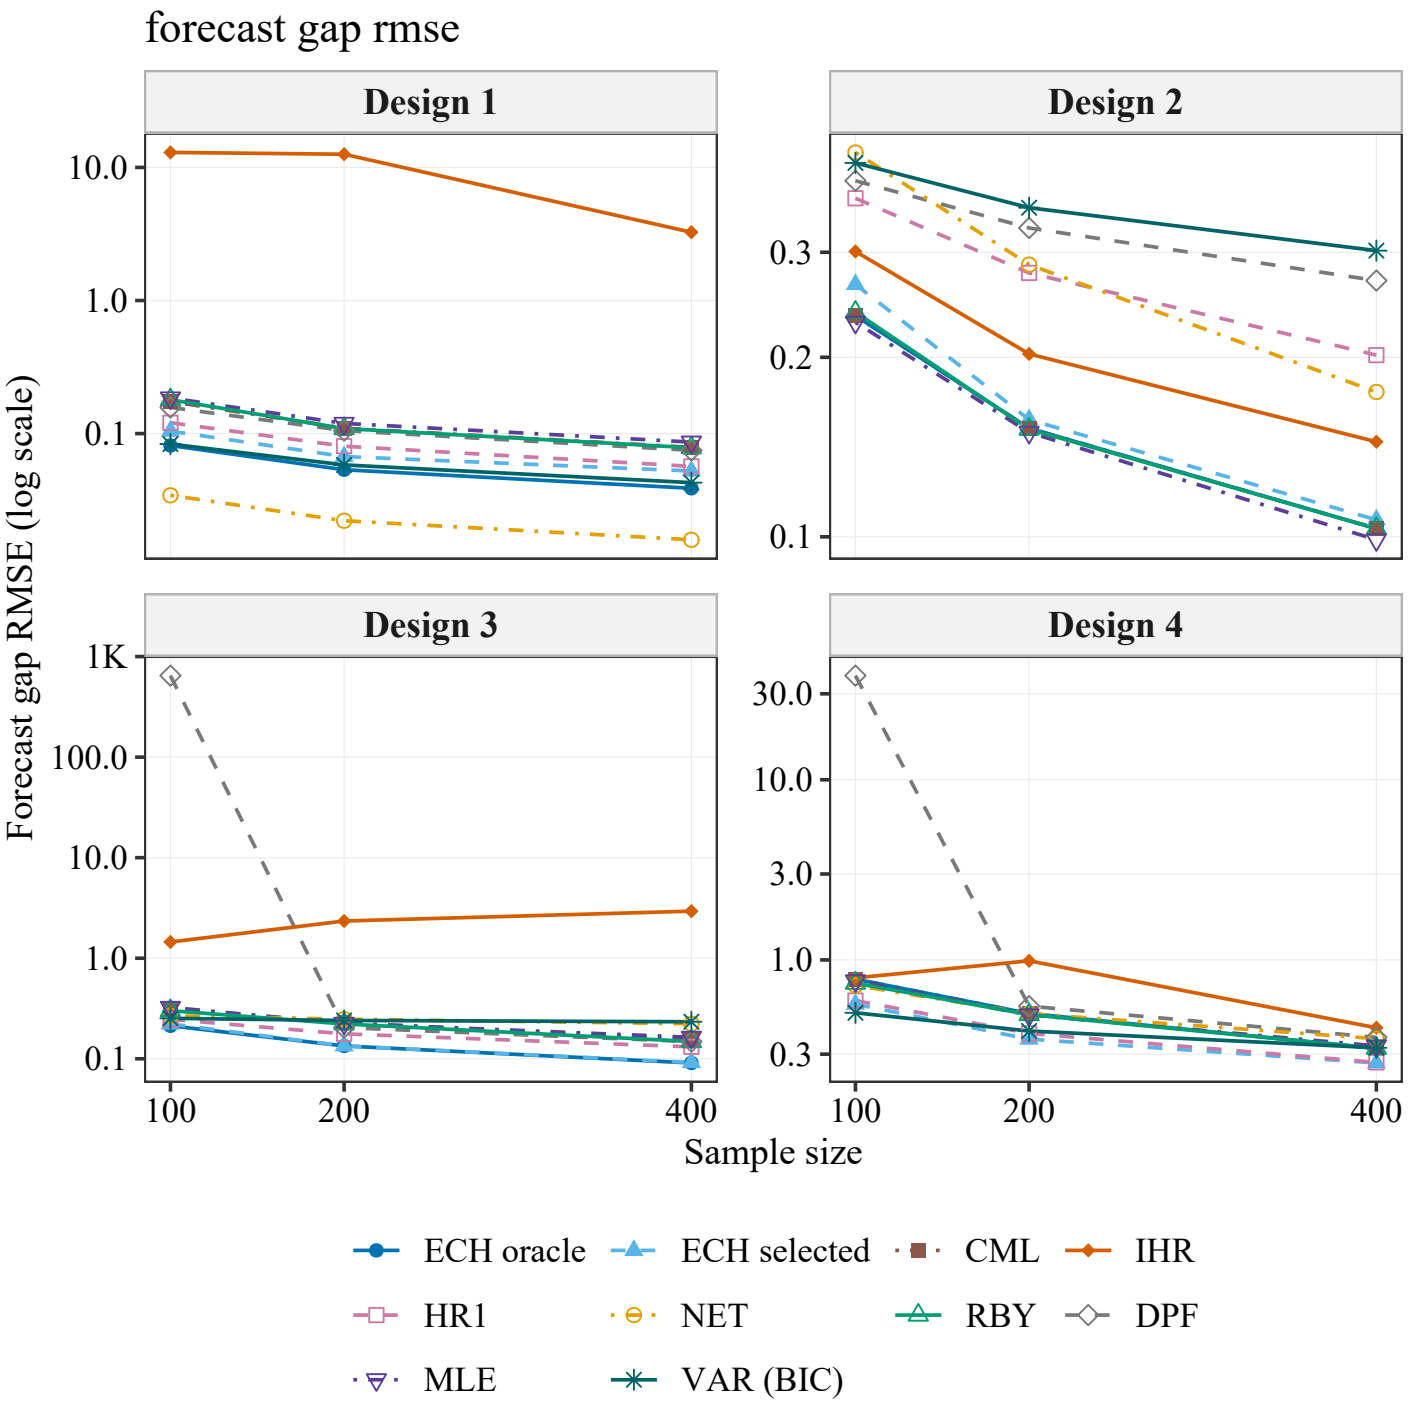

Distance from the DGP conditional forecast, pooling all horizons and variables within replication. This excludes the realized future shock contribution. Full sample: all usable estimates are included, even when nonconverged, unstable or noninvertible. Accuracy is conditional on usable outputs; consult usable counts and diagnostics. Vertical axes are logarithmic and vary by design; exact zeros appear only in the tables. Lines connect simulated points without a fitted convergence rate.

fit time

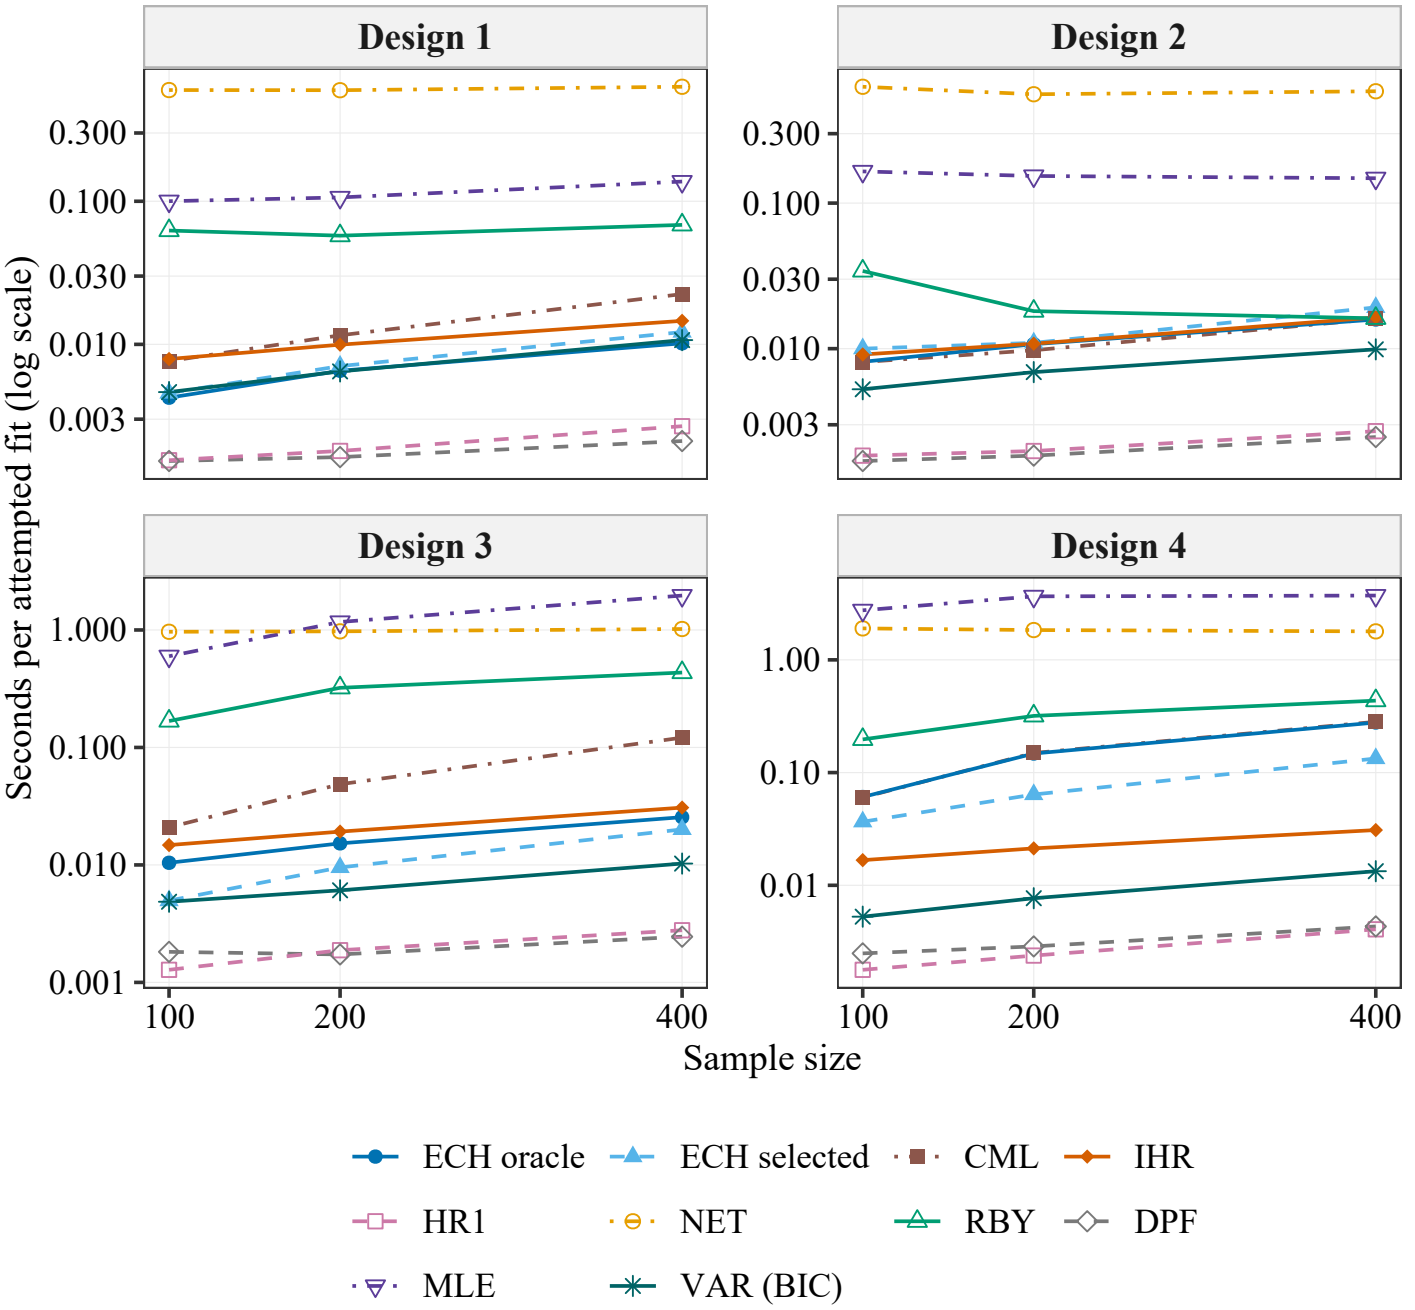

Mean elapsed estimation time, including failed attempts, measured inside the simulation workers. All attempts are used irrespective of the accuracy subset. Worker times do not measure overall wall-clock time. Full sample: all usable estimates are included, even when nonconverged, unstable or noninvertible. Accuracy is conditional on usable outputs; consult usable counts and diagnostics. Vertical axes are logarithmic and vary by design; exact zeros appear only in the tables. Lines connect simulated points without a fitted convergence rate.