PART 3 :

```
Last login: Sat Oct 31 13:29:50 on ttys000
(base) matthieulbb@MacBook-Air-de-Matthieu-3 ~ % cd '/Users/matthieulbb/Documents/git cours/esilv-marketpulse-g01-t3M
quote>
(base) matthieulbb@MacBook-Air-de-Matthieu-3 ~ % cd '/Users/matthieulbb/Documents/git cours/esilv-marketpulse-g01-t3M'
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git --version
git config user.name
git config user.email
git version 2.47.0
matthieulbb
matthieu.labbe@edu.devinci.fr
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git config --global user.name "Matthieu Labbé"
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git statues
git : 'statues' n'est pas une commande git. Voir 'git --help'.

La commande la plus ressemblante est
        status
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git status
Rafraîchir l'index: 100% (18/18), fait.
Sur la branche matthieu_labbe
Votre branche est à jour avec 'origin/matthieu_labbe'.

Fichiers non suivis:
  (utilisez "git add <fichier>..." pour inclure dans ce qui sera validé)
        result/td03_captures.docx
        result/~$03_captures.docx

aucune modification ajoutée à la validation mais des fichiers non suivis sont présents (utilisez "git add" pour les suivre)
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git diff
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git diff
diff --git a/src/main.py b/src/main.py
index d9dae5b..eb830fa 100644
--- a/src/main.py
+++ b/src/main.py
@@ -48,6 +48,7 @@ def display_market_summary(asset, prices, show_currency=True):
     print(f"First close  : {first_close:.2f}{unit}")
     print(f"Last close   : {last_close:.2f}{unit}")

+
 def main():
     instruments = load_instruments()
     prices = load_prices()
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M %    git status
[   git diff
Sur la branche matthieu_labbe
Votre branche est en retard sur 'origin/matthieu_labbe' de 1 commit, et peut être mise à jour en avance rapide.
  (utilisez "git pull" pour mettre à jour votre branche locale)

Modifications qui ne seront pas validées :
  (utilisez "git add <fichier>..." pour mettre à jour ce qui sera validé)
  (utilisez "git restore <fichier>..." pour annuler les modifications dans le répertoire de travail)
        modifié :         src/main.py

Fichiers non suivis:
  (utilisez "git add <fichier>..." pour inclure dans ce qui sera validé)
        result/td03_captures.docx
        result/~$03_captures.docx
```

```
aucune modification n'a été ajoutée à la validation (utilisez "git add" ou "git commit -a")
diff --git a/src/main.py b/src/main.py
index d9dae5b..eb830fa 100644
--- a/src/main.py
+++ b/src/main.py
@@ -48,6 +48,7 @@ def display_market_summary(asset, prices, show_currency=True):
     print(f"First close  : {first_close:.2f}{unit}")
     print(f"Last close   : {last_close:.2f}{unit}")

+
 def main():
     instruments = load_instruments()
     prices = load_prices()
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git pull
Mise à jour 05d7924..2d530c1
Fast-forward
 result/{td02_captures.pdf => td01_02_captures.pdf} | Bin
 1 file changed, 0 insertions(+), 0 deletions(-)
 rename result/{td02_captures.pdf => td01_02_captures.pdf} (100%)
```

1. Which files are modified?
   src/main.py.


2. Which lines were added?
   Blank lines between the function definitions.

3. Which lines were removed?
   None.

4. Does the diff match the work you intended?
   Yes. It improves code formatting (two blank lines between functions, following PEP 8) without changing the program's behaviour.

5. Is there temporary debugging output that should be removed before committing?
   No. All temporary print statements were already removed during TD02.

PART 4

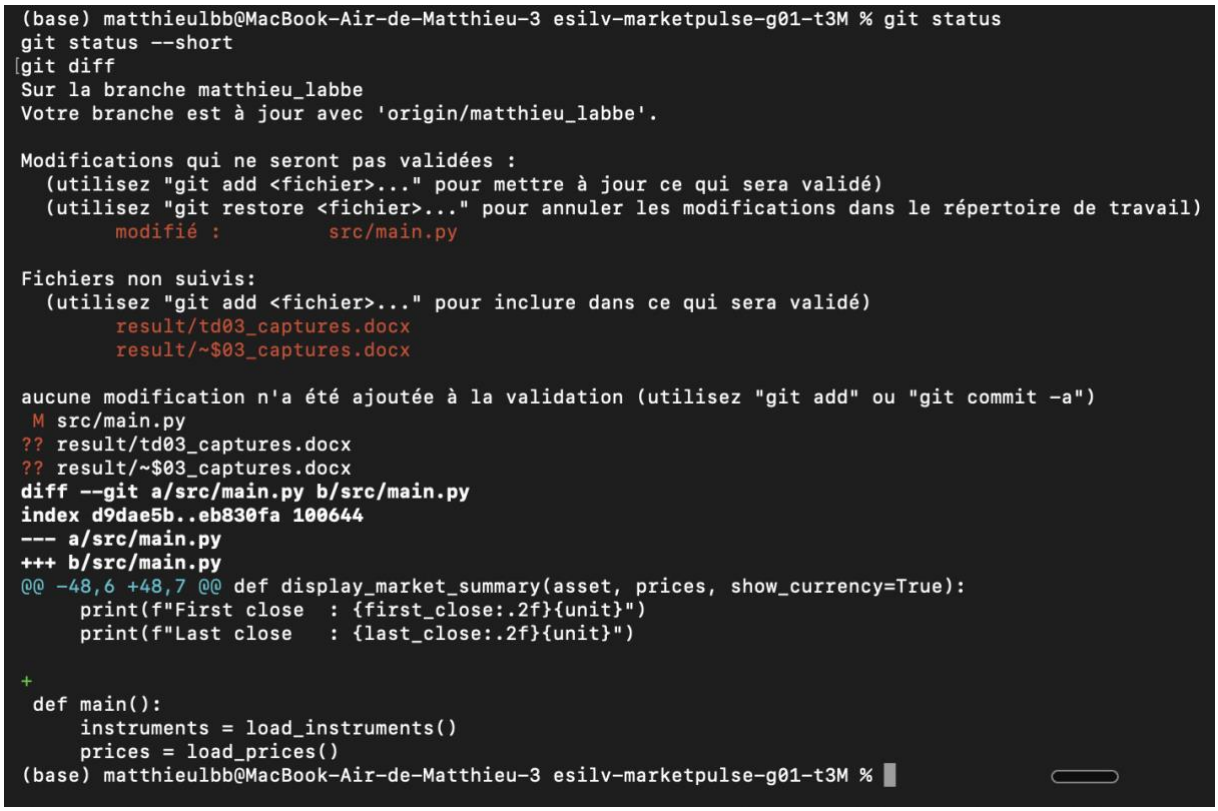

PART 5

```
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git add src/main.py
git status
git diff
git diff --staged
Sur la branche matthieu_labbe
Votre branche est à jour avec 'origin/matthieu_labbe'.

Modifications qui seront validées :
  (utilisez "git restore --staged <fichier>..." pour désindexer)
        modifié :         src/main.py

Fichiers non suivis:
  (utilisez "git add <fichier>..." pour inclure dans ce qui sera validé)
        result/td03_captures.docx
        result/~$03_captures.docx

diff --git a/src/main.py b/src/main.py
index d9dae5b..eb830fa 100644
--- a/src/main.py
+++ b/src/main.py
@@ -48,6 +48,7 @@ def display_market_summary(asset, prices, show_currency=True):
     print(f"First close  : {first_close:.2f}{unit}")
     print(f"Last close   : {last_close:.2f}{unit}")

+
 def main():
     instruments = load_instruments()
     prices = load_prices()
```

- What does git diff show?
  Unstaged changes: modifications not yet selected for the next commit.
- What does git diff--staged show?
  Staged changes: modifications selected with git add for the next commit.
- Why not use git add .?
  It would stage every file, including unwanted ones like result/~$03_captures.docx (a temporary Word file).

PART 6

```
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git add src/main.py
git status
git diff
git diff --staged
Sur la branche matthieu_labbe
Votre branche est à jour avec 'origin/matthieu_labbe'.

Modifications qui seront validées :
  (utilisez "git restore --staged <fichier>..." pour désindexer)
        modifié :         src/main.py

Fichiers non suivis:
  (utilisez "git add <fichier>..." pour inclure dans ce qui sera validé)
        result/td03_captures.docx
        result/~$03_captures.docx

diff --git a/src/main.py b/src/main.py
index d9dae5b..eb830fa 100644
--- a/src/main.py
+++ b/src/main.py
@@ -48,6 +48,7 @@ def display_market_summary(asset, prices, show_currency=True):
     print(f"First close  : {first_close:.2f}{unit}")
     print(f"Last close   : {last_close:.2f}{unit}")

+
 def main():
     instruments = load_instruments()
     prices = load_prices()
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % python src/main.py
=== MarketPulse ===


Market configuration
Period   : 1 month
Interval : Daily

Instrument
AAPL - Apple Inc.
Observations : 21
First close  : 250.00 USD
Last close   : 266.20 USD

Benchmark
SP500 - S&P 500
Observations : 21
First close  : 6600.00
Last close   : 6742.00
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git commit -m "add blank line before main function"
[matthieu_labbe eb6f49e] add blank line before main function
 1 file changed, 1 insertion(+)
```

- Why run python src/main.py before committing?
  To make sure the project still works and avoid committing broken code.
- Why is this commit message appropriate?
  It describes the actual change (a formatting fix)
- What does this commit represent?
  A small, coherent formatting improvement to src/main.py that follows the PEP 8 convention without changing the program's behaviour.

PART 7 :

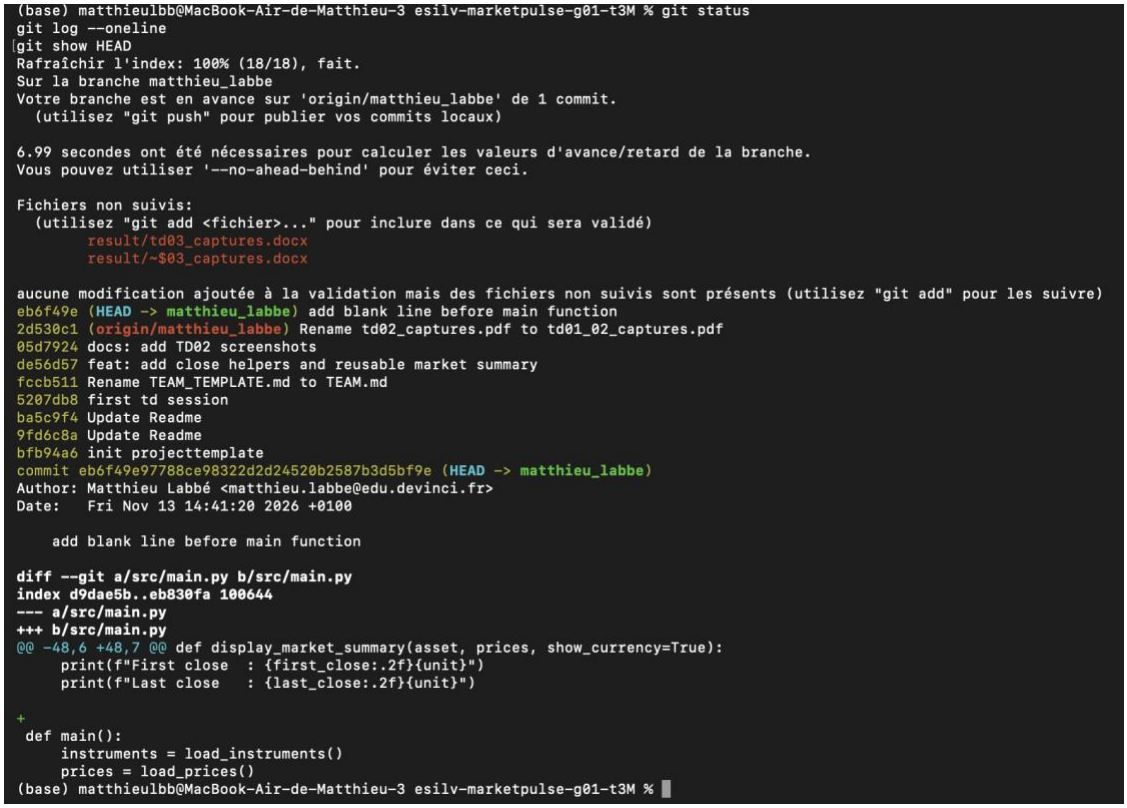

1. Which files changed?
   Only src/main.py.

2. What does the diff represent?
   One blank line added before the main() function, to follow the PEP 8 formatting convention. The program's behaviour is unchanged.

3. Why is the commit message appropriate?
   It describes exactly what changed, in a short and specific way, instead of a vague message like "update".

4. Who is recorded as the author?
   Matthieu Labbé, with the email matthieu.labbe@edu.devinci.fr. Vérifie dans git show HEAD que c'est bien ce qui s'affiche sur la ligne Author:.

PART 8 :

- Which commits are mine?
  de56d57 (TD02 work: close helpers and reusable market summary) and eb6f49e (formatting fix).

- What did I change?
  In de56d57: added get_first_close, get_last_close and display_market_summary, and simplified main(). In eb6f49e: added a blank line before main().

- Why did I change it?
  To make the market summary reusable for both the instrument and the benchmark, and to follow the PEP 8 formatting convention.

- Can I explain the diff?
  Yes, line by line with git show <commit-id>.

TD 04

```
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git branch
git switch -c feature/display-observation-dates
[git branch
  main
* matthieu_labbe
Basculement sur la nouvelle branche 'feature/display-observation-dates'
* feature/display-observation-dates
  main
  matthieu_labbe
```

```
[(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % python3 src/main.py
=== MarketPulse ===

Market configuration
Period   : 1 month
Interval : Daily

Instrument
AAPL - Apple Inc.
Observations : 21
First date   : 2026-09-01
Last date    : 2026-09-30
First close  : 250.00 USD
Last close   : 266.20 USD

Benchmark
SP500 - S&P 500
Observations : 21
First date   : 2026-09-01
Last date    : 2026-09-30
First close  : 6600.00
Last close   : 6742.00
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M %
```

```
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git status
git diff
git add src/main.py
git diff --staged
git commit -m "feat: display first and last observation dates"
git status
git log --oneline -5
Rafraîchir l'index: 100% (21/21), fait.
Sur la branche feature/display-observation-dates
Modifications qui ne seront pas validées :
  (utilisez "git add <fichier>..." pour mettre à jour ce qui sera validé)
  (utilisez "git restore <fichier>..." pour annuler les modifications dans le répertoire de travail)
        modifié :         src/main.py

Fichiers non suivis:
  (utilisez "git add <fichier>..." pour inclure dans ce qui sera validé)
        result/td03_captures.docx
        result/~$03_captures.docx


aucune modification n'a été ajoutée à la validation (utilisez "git add" ou "git commit -a")
diff --git a/src/main.py b/src/main.py
index eb830fa..0b5af1d 100644
--- a/src/main.py
+++ b/src/main.py
@@ -34,6 +34,13 @@ def get_last_close(prices):
     last_row = prices[-1]
     return float(last_row["close"])

+def get_first_date(prices):
+    return prices[0]["date"]
+
+
+def get_last_date(prices):
+    return prices[-1]["date"]
+
 def display_market_summary(asset, prices, show_currency=True):
     first_close = get_first_close(prices)
     last_close = get_last_close(prices)
@@ -45,6 +52,8 @@ def display_market_summary(asset, prices, show_currency=True):

     print(f"{asset['ticker']} - {asset['name']}")
     print(f"Observations : {len(prices)}")
+    print(f"First date   : {get_first_date(prices)}")
+    print(f"Last date    : {get_last_date(prices)}")
     print(f"First close  : {first_close:.2f}{unit}")
     print(f"Last close   : {last_close:.2f}{unit}")

diff --git a/src/main.py b/src/main.py
index eb830fa..0b5af1d 100644
--- a/src/main.py
+++ b/src/main.py
@@ -34,6 +34,13 @@ def get_last_close(prices):
     last_row = prices[-1]
     return float(last_row["close"])

+def get_first_date(prices):
```

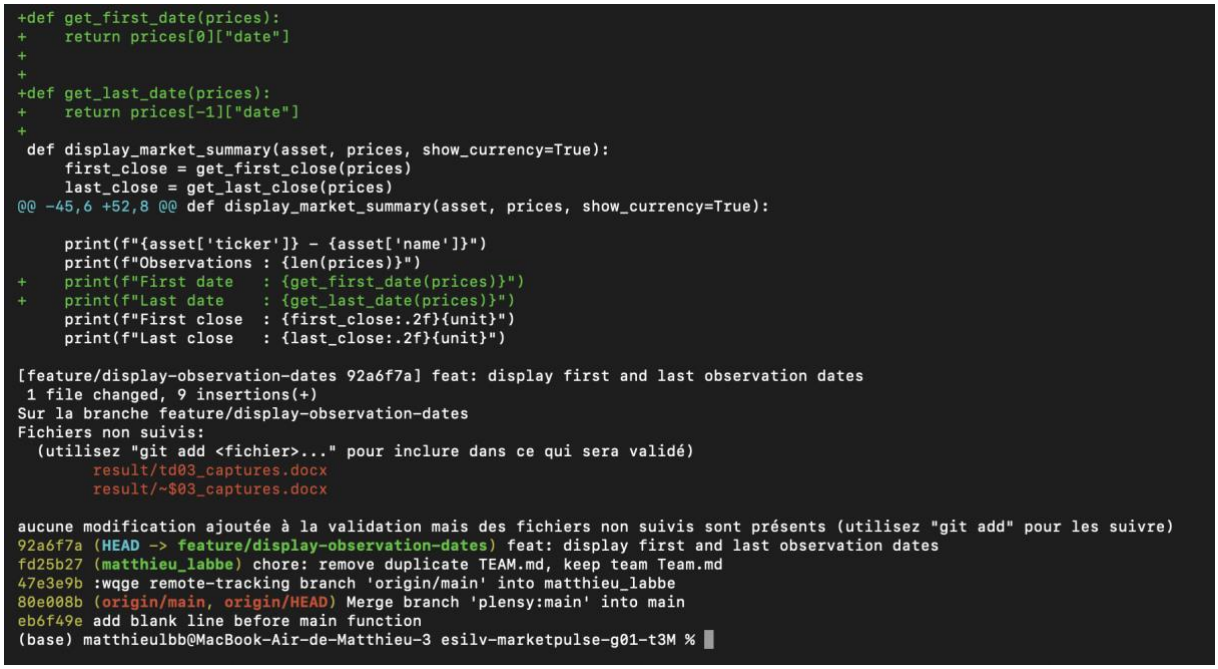

- Which branch does the new commit belong to?
  feature/display-observation-dates only.
- Is the feature part of matthieu_labbe yet?
  No. It is isolated on the feature branch until it is merged.

```
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git log --oneline --graph --decorate --all
[git diff matthieu_labbe..feature/display-observation-dates
* 92a6f7a (HEAD -> feature/display-observation-dates) feat: display first and last observation dates
* fd25b27 (matthieu_labbe) chore: remove duplicate TEAM.md, keep team Team.md
*   47e3e9b :wqge remote-tracking branch 'origin/main' into matthieu_labbe
|\
* | eb6f49e add blank line before main function
* | 2d530c1 (origin/matthieu_labbe) Rename td02_captures.pdf to td01_02_captures.pdf
* | 05d7924 docs: add TD02 screenshots
* | de56d57 feat: add close helpers and reusable market summary
* | fccb511 Rename TEAM_TEMPLATE.md to TEAM.md
| | * 5f3b5a2 (origin/mathieu_caron) docs: rename TD1-2 results file
| | * 4c3a8e4 refactor: remove TD02 temporary debug output
| | * dd3d441 resultats finaux
| | * 6280256 maj des résultats
| | * a02cf45 Create mathieu caron results sheet
| | | * 963cc54 (origin/feature/display-market-metadata) feat: display market metadata
| | |/
| |/|
| * |   80e008b (origin/main, origin/HEAD) Merge branch 'plensy:main' into main
| |\ \
| | |/
| |/|
| | * c388ccd Add files via upload
| |/
|/|
| * 6a997b0 Update team members in Team.md
| * 5230ec1 Create Team.md with team and project details
| * e3a5d41 Delete Team.md
| * 30929ba Create Team.md with team details and guidelines
|/
| * 30d3ad2 (origin/matthieu_lacoste) resultat pdf du td3
| * c09dbec test modifying for git diff understanding
```

```
| * c09dbec test modifying for git diff understanding
| * 2c16b63 result td02
| * 568ebdb result td01
| * b925509 suppression
| * c095ac7 add test file
| * 95f33db Delete Team.md
| * 3949d2b Create Team.md with team and project details
|/
| * 6fd2cf6 (origin/mayeul_bonnaud) refactor: clean MarketPulse summary output
| * 06c9daf devoir
| * 91a8cca Ajout TD1.docx
|/
| * 51508a5 (main) resultat
|/
* 5207db8 first td session
* ba5c9f4 Update Readme
* 9fd6c8a Update Readme
* bfb94a6 init projecttemplate
diff --git a/src/main.py b/src/main.py
index eb830fa..0b5af1d 100644
--- a/src/main.py
+++ b/src/main.py
@@ -34,6 +34,13 @@ def get_last_close(prices):
     last_row = prices[-1]
     return float(last_row["close"])

+def get_first_date(prices):
+    return prices[0]["date"]
+
+
+def get_last_date(prices):
+    return prices[-1]["date"]
+
 def display_market_summary(asset, prices, show_currency=True):
     first_close = get_first_close(prices)
     last_close = get_last_close(prices)
@@ -45,6 +52,8 @@ def display_market_summary(asset, prices, show_currency=True):

     print(f"{asset['ticker']} - {asset['name']}")
     print(f"Observations : {len(prices)}")
+    print(f"First date   : {get_first_date(prices)}")
+    print(f"Last date    : {get_last_date(prices)}")
     print(f"First close  : {first_close:.2f}{unit}")
     print(f"Last close   : {last_close:.2f}{unit}")


(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M %
```

1. Which change exists on the feature branch?
   The commit 92a6f7a, which adds get_first_date, get_last_date and displays the first and last observation dates in the market summary.

2. Why is that change not yet part of the base branch?
   Because it was committed on the feature branch only. A branch isolates its commits until they are merged.

3. What would happen if the branch were abandoned before merge?
   The base branch would stay unchanged: the feature would never reach it, and the work would only exist on the abandoned branch.

```
(base) matthieulbb@MacBook-Air-de-Matthieu-3 esilv-marketpulse-g01-t3M % git switch matthieu_labbe
git branch
git merge feature/display-observation-dates
git log --oneline --graph --decorate --all
python3 src/main.py
Basculement sur la branche 'matthieu_labbe'
Votre branche est en avance sur 'origin/matthieu_labbe' de 9 commits.
  (utilisez "git push" pour publier vos commits locaux)
  feature/display-observation-dates
  main
* matthieu_labbe
Mise à jour fd25b27..92a6f7a
Fast-forward
 src/main.py | 9 +++++++++
 1 file changed, 9 insertions(+)
* 92a6f7a (HEAD -> matthieu_labbe, feature/display-observation-dates) feat: display first and last observation dates
* fd25b27 chore: remove duplicate TEAM.md, keep team Team.md
*   47e3e9b :wqge remote-tracking branch 'origin/main' into matthieu_labbe
|\
* | eb6f49e add blank line before main function
* | 2d530c1 (origin/matthieu_labbe) Rename td02_captures.pdf to td01_02_captures.pdf
* | 05d7924 docs: add TD02 screenshots
* | de56d57 feat: add close helpers and reusable market summary
* | fccb511 Rename TEAM_TEMPLATE.md to TEAM.md
| | * 5f3b5a2 (origin/mathieu_caron) docs: rename TD1-2 results file
| | * 4c3a8e4 refactor: remove TD02 temporary debug output
| | * dd3d441 resultats finaux
| | * 6280256 maj des résultats
| | * a02cf45 Create mathieu caron results sheet
| | | * 963cc54 (origin/feature/display-market-metadata) feat: display market metadata
| | |/
| |/|
| * |   80e008b (origin/main, origin/HEAD) Merge branch 'plensy:main' into main
| |\ \
| | |/
| |/|
| | * c388ccd Add files via upload
| |/
|/|
| * 6a997b0 Update team members in Team.md
| * 5230ec1 Create Team.md with team and project details
| * e3a5d41 Delete Team.md
| * 30929ba Create Team.md with team details and guidelines
|/
| * 30d3ad2 (origin/matthieu_lacoste) resultat pdf du td3
| * c09dbec test modifying for git diff understanding
| * 2c16b63 result td02
| * 568ebdb result td01
| * b925509 suppression
| * c095ac7 add test file
| * 95f33db Delete Team.md
| * 3949d2b Create Team.md with team and project details
```

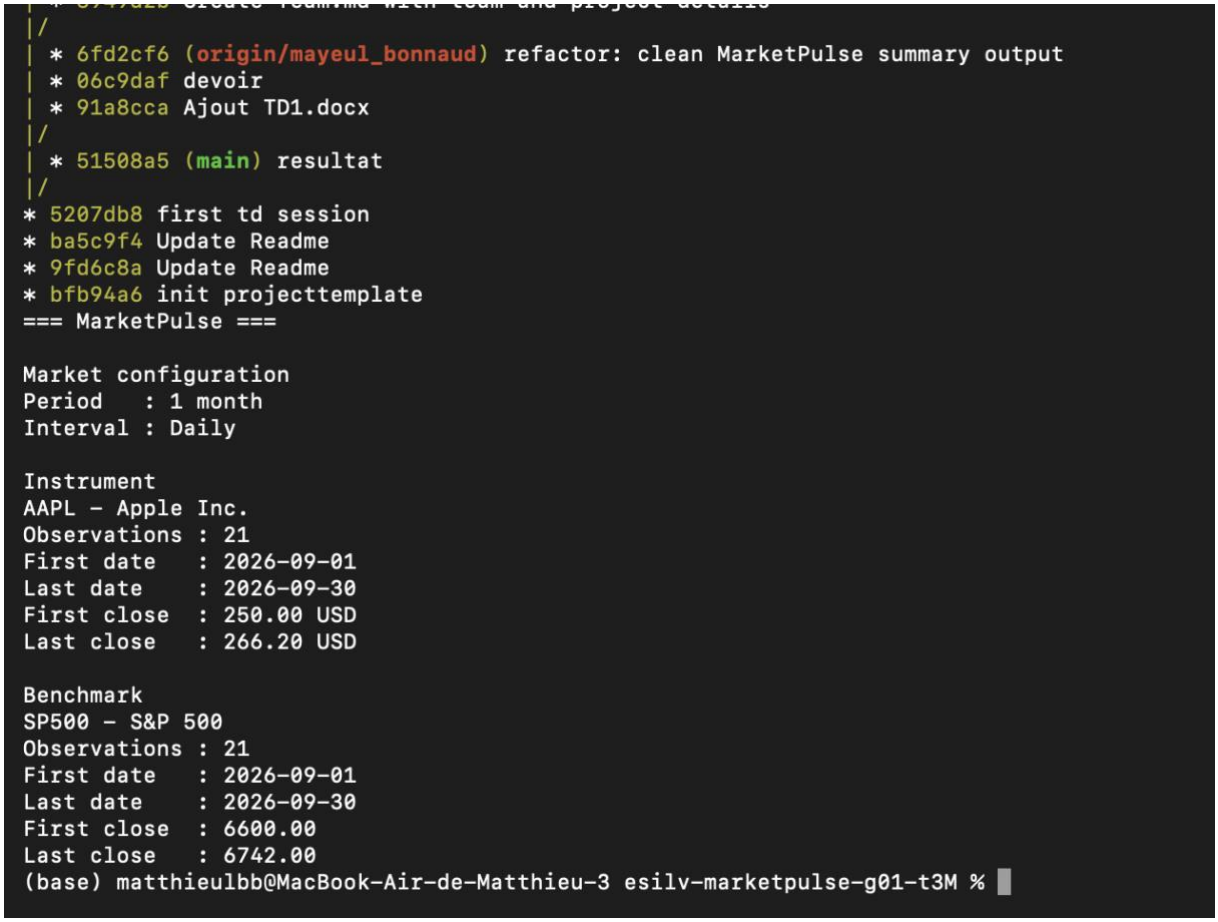



1. Is the feature now visible from the base branch?
   Yes. matthieu_labbe now contains the commit 92a6f7a, and running MarketPulse displays the dates.

2. Is the feature commit still visible?
   Yes. The commit 92a6f7a stays in the history; merging does not delete it.

3. Did Git perform a fast-forward or create a merge commit?
   A fast-forward: the base branch had no new commits since the feature branch was created, so Git simply moved the matthieu_labbe pointer forward.

4. What does the graph show?
   A linear history where both branch names point to the same commit.

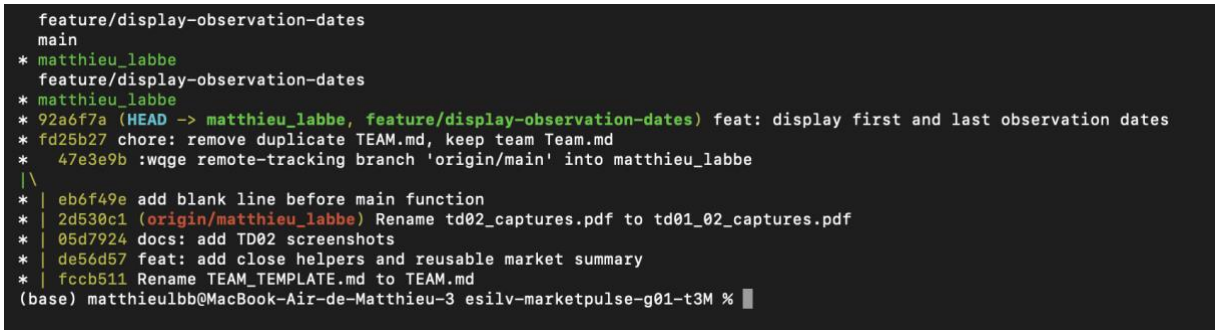

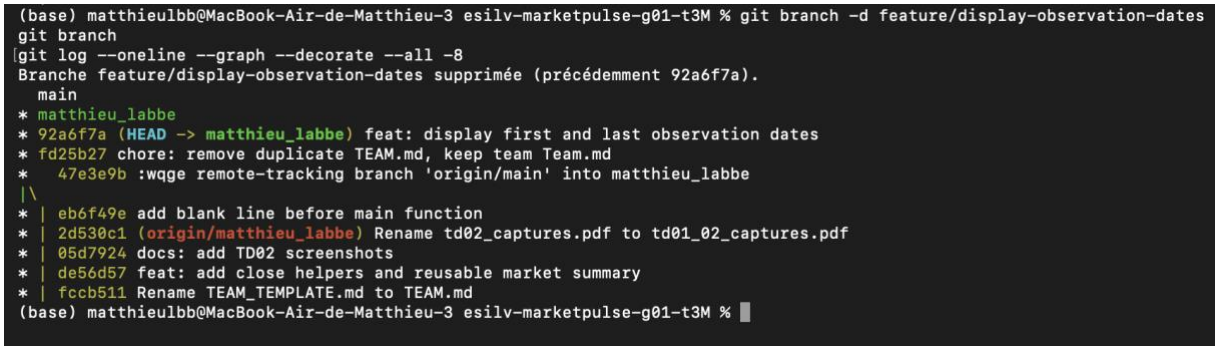

- What is a merge conflict?
  It happens when two branches change the same part of the same file differently, so Git cannot decide automatically which version to keep.
- Is a conflict a Git failure?
  No. It means a human must decide the final content.
- How do you resolve it?
  Inspect both versions, choose the final content, remove the conflict markers, then git add and commit.