

STAC Deep Dive

SpatioTemporal Asset Catalog specification and software ecosystem

ARD19

Matthew Hanson
mhanson@element84.com
@GeoSkeptic

Element 84

What is it?

SpatioTemporal Asset Catalog

- Defined metadata for geospatial catalogs and assets
  - Focus on search and discovery
  - Simple and extensible
- Static catalogs
  - Crawlable
- Dynamic APIs
  - Searchable on arbitrary fields

What is it *not*?

SpatioTemporal Asset Catalog

- Full-fledged metadata standard
- Single source of truth
- Covering *all* kind of datasets
- Replacement for ISO 19115, OGC CSW, …

The specification

- Catalogs
  - There's always a root catalog
  - Contains other catalogs and collections
- Collections
  - Can contain other catalogs (called sub-catalogs) to group Items further
    - e.g., For Landsat-8 there might be sub-catalog by Landsat Path and Row
  - Ultimately contains Items which are similar in some way(s)
    - e.g., same instrument, same region containing data from different instruments, etc.
- Items
  - A single scene or set of datafiles for a specific location at a specific date and time (when and where)

Catalog Fields

Element	Type	Description
stac_version	string	**REQUIRED.** The STAC version the catalog implements.
id	string	**REQUIRED.** Identifier for the catalog.
title	string	A short descriptive one-line title for the catalog.
description	string	**REQUIRED.** Detailed multi-line description to fully explain the catalog. CommonMark 0.28 syntax MAY be used for rich text representation.
links	[Link Object]	**REQUIRED.** A list of references to other documents.

Links

Field Name	Type	Description
href	string	**REQUIRED.** The actual link in the format of an URL. Relative and absolute links are both allowed.
rel	string	**REQUIRED.** Relationship between the current document and the linked document. See chapter "Relation types" for more information.
type	string	Media type of the referenced entity.
title	string	A human readable title to be used in rendered displays of the link.

Hierarchical Links

Type	Description
self	STRONGLY RECOMMENDED. *Absolute* URL to the location that the catalog file can be found online, if available. This is particularly useful when in a download package that includes metadata, so that the downstream user can know where the data has come from.
root	STRONGLY RECOMMENDED. URL to the root STAC Catalog or Collection. Catalogs should include a link to their root, even if it's the root and points to itself.
parent	URL to the parent STAC Catalog or Collection. Non-root catalogs should include a link to their parent.
child	URL to a child STAC Catalog or Collection.
item	URL to a STAC Item.

Collection Fields

Element	Type	Description
stac_version	string	**REQUIRED.** The STAC version the collection implements.
id	string	**REQUIRED.** Identifier for the collection that is unique across the provider.
title	string	A short descriptive one-line title for the collection.
description	string	**REQUIRED.** Detailed multi-line description to fully explain the collection. CommonMark 0.28 syntax MAY be used for rich text representation.
keywords	[string]	List of keywords describing the collection.
version	string	Version of the collection.
license	string	**REQUIRED.** Collection's license(s) as a SPDX License identifier or expression or `proprietary` if the license is not on the SPDX license list. Proprietary licensed data SHOULD add a link to the license text, see the `license` relation type.
providers	[Provider Object]	A list of providers, which may include all organizations capturing or processing the data or the hosting provider. Providers should be listed in chronological order with the most recent provider being the last element of the list.
extent	Extent Object	**REQUIRED.** Spatial and temporal extents.
properties	object	Common fields across referenced items. May also be used to describe standalone collections better that don't reference any items. See the section 'Common Fields' for more information.
links	[Link Object]	**REQUIRED.** A list of references to other documents.

Item Fields

Field Name	Type	Description
id	string	**REQUIRED.** Provider identifier. As most geospatial assets are already defined by some identification scheme by the data provider it is recommended to simply use that ID. Data providers are advised to include sufficient information to make their IDs globally unique, including things like unique satellite IDs.
type	string	**REQUIRED.** Type of the GeoJSON Object. MUST be set to `Feature`.
geometry	GeoJSON Geometry Object	**REQUIRED.** Defines the full footprint of the asset represented by this item, formatted according to RFC 7946, section 3.1. The footprint should be the default GeoJSON geometry, though additional geometries can be included. Specified in Longitude/Latitude based on EPSG:4326.
bbox	[number]	**REQUIRED.** Bounding Box of the asset represented by this item. Specified in Longitude/Latitude based on EPSG:4326 - first two numbers are longitude and latitude of lower left corner, followed by longitude and latitude of upper right corner. This field enables more naive clients to easily index and search geospatially. Most software can easily generate them for footprints. STAC compliant APIs are required to compute intersection operations with the item's geometry field, not its bbox.
properties	Properties Object	**REQUIRED.** A dictionary of additional metadata for the item.
links	[Link Object]	**REQUIRED.** List of link objects to resources and related URLs. A link with the `rel` set to `self` is required.
assets	Map<string, Asset Object>	**REQUIRED.** Dictionary of asset objects that can be downloaded, each with a unique key. Some pre-defined keys are listed in the chapter 'Asset types'.
collection	string	The `id` of the STAC Collection this Item references to (see `collection` relation type below). This field is *required* if such a relation type is present. This field provides an easy way for a user to search for any Items that belong in a specified Collection.

Item Properties

Field Name	Type	Description
datetime	string	**REQUIRED.** The searchable date and time of the assets, in UTC. It is formatted according to RFC 3339, section 5.6.
license	string	Item's license(s) as a SPDX License identifier or expression or `proprietary` if the license is not on the SPDX license list. Proprietary licensed data SHOULD add a link to the license text, see the `license` relation type.
providers	[Provider Object]	A list of providers, which may include all organizations capturing or processing the data or the hosting provider. Providers should be listed in chronological order with the most recent provider being the last element of the list.
title	string	A human readable title describing the item.
created	string	Creation date and time of this metadata file. This is NOT the timestamp the asset was created. MUST be formatted according to RFC 3339, section 5.6.
updated	string	Date and time this metadata file was updated last. This is NOT the timestamp the asset was updated last. MUST be formatted according to RFC 3339, section 5.6.

Item Assets

Field Name	Type	Description
href	string	**REQUIRED.** Link to the asset object. Relative and absolute links are both allowed.
title	string	The displayed title for clients and users.
type	string	Media type of the asset (see chapter on Media Types below).

Not Secure | landsat-stac.s3.amazonaws.com/catalog.json

Apps | Devseed | Beachfront | Gaming | Imported | sort | Geospatial | Remote Sensing | Screens | Programming

+ - View source


```
{
   id: "landsat-stac",
   stac_version: "0.6.0",
   description: "STAC for Landsat data",
 - links: [
    - {
         rel: "self",
         href: "https://landsat-stac.s3.amazonaws.com/catalog.json"
      },
    - {
         rel: "root",
         href: "./catalog.json"
      },
    - {
         rel: "child",
         href: "landsat-8-l1/catalog.json"
      }
   ]
}
```


inks

Content Extensions

Extension Name (Prefix)	Scope	Description	Maturity
Checksum (`checksum`)	Item +Catalog +Collection	Provides a way to specify file checksums for assets and links in Items, Catalogs and Collections.	*Proposal*
Data Cube (`cube`)	Item	Data Cube related metadata, especially to describe their dimensions.	*Proposal*
Datetime Range (`dtr`)	Item	An extension to provide datetime ranges with a start and an end datetime stamp in a consistent way.	*Proposal*
EO (`eo`)	Item	Covers electro-optical data that represents a snapshot of the earth for a single date and time. It could consist of multiple spectral bands, for example visible bands, infrared bands, red edge bands and panchromatic bands. The extension provides common fields like bands, cloud cover, off nadir, sun angle + elevation, gsd and more.	*Pilot*
Label (`label`)	Item	Items that relate labeled AOIs with source imagery	*Proposal*
Point Cloud (`pc`)	Item	Provides a way to describe point cloud datasets. The point clouds can come from either active or passive sensors, and data is frequently acquired using tools such as LiDAR or coincidence-matched imagery.	*Proposal*
SAR (`sar`)	Item	Covers synthetic-aperture radar data that represents a snapshot of the earth for a single date and time.	*Proposal*
Scientific (`sci`)	Item	Scientific metadata is considered to be data that indicate from which publication data originates and how the data itself should be cited or referenced.	*Proposal*

EO Extension

Field Name	Type	Description
eo:gsd	number	**REQUIRED.** Ground Sample Distance at the sensor.
eo:platform	string	**REQUIRED.** Unique name of the specific platform the instrument is attached to. For satellites this would be the name of the satellite (e.g., landsat-8, sentinel-2A), whereas for drones this would be a unique name for the drone.
eo:constellation	string	Name of the constellation that the platform belongs to. See below for details.
eo:instrument	string	**REQUIRED.** Name of instrument or sensor used (e.g., MODIS, ASTER, OLI, Canon F-1).
eo:bands	[Band Object]	**REQUIRED.** This is a list of the available bands where each item is a Band Object.
eo:epsg	integer|null	EPSG code of the datasource, `null` if no EPSG code.
eo:cloud_cover	number	Estimate of cloud cover as a percentage (0-100) of the entire scene. If not available the field should not be provided.
eo:off_nadir	number	Viewing angle. The angle from the sensor between nadir (straight down) and the scene center. Measured in degrees (0-90).
eo:azimuth	number	Viewing azimuth angle. The angle measured from the sub-satellite point (point on the ground below the platform) between the scene center and true north. Measured clockwise from north in degrees (0-360).
eo:sun_azimuth	number	Sun azimuth angle. From the scene center point on the ground, this is the angle between truth north and the sun. Measured clockwise in degrees (0-360).
eo:sun_elevation	number	Sun elevation angle. The angle from the tangent of the scene center point to the sun. Measured from the horizon in degrees (0-90).

EO Band Object

Field Name	Type	Description
name	string	The name of the band (e.g., "B01", "B02", "B1", "B5", "QA").
common_name	string	The name commonly used to refer to the band to make it easier to search for bands across instruments. See below for a list of accepted common names.
description	string	Description to fully explain the band. CommonMark 0.28 syntax MAY be used for rich text representation.
gsd	number	Ground Sample Distance, the nominal distance between pixel centers available, in meters. Defaults to `eo:gsd` if not provided.
accuracy	number	The expected error between the measured location and the true location of a pixel, in meters on the ground.
center_wavelength	number	The center wavelength of the band, in micrometers (μm).
full_width_half_max	number	Full width at half maximum (FWHM). The width of the band, as measured at half the maximum transmission, in micrometers (μm).

EO Band Common Names

Common Name	Band Range (µm)	Landsat 5	Landsat 7	Landsat 8	Sentinel 2	MODIS
coastal	0.40 - 0.45			1	1	
blue	0.45 - 0.5	1	1	2	2	3
green	0.5 - 0.6	2	2	3	3	4
red	0.6 - 0.7	3	3	4	4	1
pan	0.5 - 0.7		8	8		
nir	0.77 - 1.00	4	4	5	8	2
cirrus	1.35 - 1.40			9	10	26
swir16	1.55 - 1.75	5	5	6	11	6
swir22	2.1 - 2.3	7	7	7	12	7
lwir11	10.5 - 11.5			10		31
lwir12	11.5 - 12.5			11		32

Linking Assets to Bands

```
- eo:bands: [
    - {
        name: "B1",
        common_name: "coastal",
        gsd: 30,
        center_wavelength: 0.44,
        full_width_half_max: 0.02
      },
    - {
        name: "B2",
        common_name: "blue",
        gsd: 30,
        center_wavelength: 0.48,
        full_width_half_max: 0.06
      },
    - {
        name: "B3",
        common_name: "green",
        gsd: 30,
        center_wavelength: 0.56,
        full_width_half_max: 0.06
      },
```

```
- assets: {
    - index: {
        type: "text/html",
        title: "HTML index page"
      },
    - thumbnail: {
        title: "Thumbnail image",
        type: "image/jpeg"
      },
    - B1: {
        type: "image/x.geotiff",
      - eo:bands: [
            0
        ],
        title: "Band 1 (coastal)"
      },
    - B2: {
        type: "image/x.geotiff",
      - eo:bands: [
            1
        ],
        title: "Band 2 (blue)"
      },
    - B3: {
        type: "image/x.geotiff",
      - eo:bands: [
            2
        ],
        title: "Band 3 (green)"
      },
```

SAR Extension - 1

Field Name	Type	Description
sar:platform	string	**REQUIRED.** Unique name of the specific platform the instrument is attached to. For satellites this would be the name of the satellite (e.g., sentinel-1A).
sar:constellation	string	Name of the constellation that the platform belongs to. See below for details.
sar:instrument	string	**REQUIRED.** Name of the sensor used, although for Items which contain data from multiple sensors this could also name multiple sensors.
sar:instrument_mode	string	**REQUIRED.** The name of the sensor acquisition mode that is commonly used. This should be the short name, if available. For example, `WV` for "Wave mode" of Sentinel-1 and Envisat ASAR satellites.
sar:frequency_band	string	**REQUIRED.** The common name for the frequency band to make it easier to search for bands across instruments. See section "Common Frequency Band Names" for a list of accepted names.
sar:center_wavelength	number	The center wavelength of the instrument, in centimeters (cm).
sar:center_frequency	number	The center frequency of the instrument, in gigahertz (GHz).
sar:polarization	[string]	**REQUIRED.** A single polarization or a polarization combination specified as array. See below for more details.
sar:bands	[Band Object]	This is a list of the available bands where each item is a Band Object. See section "Band Object" for details.

SAR Extension - 2

sar:pass_direction	string|null	**REQUIRED.** Direction of the orbit, either `ascending`, `descending` or `null` if not relevant.
sar:type	string	**REQUIRED.** The product type, for example `RAW`, `GRD`, `OCN` or `SLC` for Sentinel-1.
sar:resolution_range	number	The range resolution, which is the maximum ability to distinguish two adjacent targets perpendicular to the flight path, in meters (m).
sar:resolution_azimuth	number	The azimuth resolution, which is the maximum ability to distinguish two adjacent targets parallel to the flight path, in meters (m).
sar:pixel_spacing_range	number	The range azimuth, which is the distance between adjacent pixels perpendicular to the flight path, in meters (m). Strongly RECOMMENDED to be specified for products of type `GRD`.
sar:pixel_spacing_azimuth	number	The azimuth pixel spacing, which is the distance between adjacent pixels parallel to the flight path, in meters (m). Strongly RECOMMENDED to be specified for products of type `GRD`.
sar:looks_range	number	Number of range looks, which is the number of groups of signal samples (looks) perpendicular to the flight path.
sar:looks_azimuth	number	Number of azimuth looks, which is the number of groups of signal samples (looks) parallel to the flight path.
sar:looks_equivalent_number	number	The equivalent number of looks (ENL).
sar:observation_direction	string	Antenna pointing direction relative to the flight trajectory of the satellite, either `left` or `right`.
sar:absolute_orbit	integer	An absolute orbit number associated with the acquisition. See below for details.
sar:relative_orbit	integer	A relative orbit number associated with the acquisition. See below for details.
sar:incidence_angle	number	The center incidence angle is the angle defined by the incident radar beam at the scene center and the vertical (normal) to the intercepting surface. Measured in degrees (0-90).

SAR Band Common Names

Common Name	Wavelength Range (cm)	Frequency Range (GHz)	Satellites
P	30 - 120	0.25 - 1	
L	15 - 30	1 - 2	ALOS, JERS, NISAR, SOACOM
S	7.5 - 15	2 - 4	HJ-1C
C	3.8 - 7.5	4 - 8	EnviSat, ERS, Radarsat, Risat-1, Sentinel-1
X	2.4 - 3.8	8 - 12.5	Cosmo-SkyMed, TerraSAR-X, RanDEM-X, PAZ, KOMPSat-5
Ku	1.7 - 2.4	12.5 - 18	
K	1.1 - 1.7	18 - 26.5	
Ka	0.75 - 1.1	26.5 - 40	

Label Extension

- **Tile classification labels:** A GeoJSON `FeatureCollection` with a single `Feature`. This feature's geometry should match the bounds of the labeled image tile, and a `Feature` property should define the class (see below).
- **Tile regression labels:** A GeoJSON `FeatureCollection` with a single `Feature`. This feature's geometry should match the bounds of the labeled image tile, and a `Feature` property should define the regression value (see below).
- **Object detection labels:** A GeoJSON `FeatureCollection` containing rectangular bounding boxes (as `Polygon`geometry `Features`) defining the bounds of an object of interest (e.g. a car). A `Feature` property must define the class of the object labeled. Additional `Feature` properties may be defined for additional metadata.
- **Segmentation labels:** A GeoJSON `FeatureCollection` containing `Polygon` geometry `Features` that trace the boundaries of objects of interest (e.g. buildings, vegetation, bodies of water), or raster-formatted pixel masks defining pixel classes. (See raster label notes)

Label Extension Assets and Links

- **Assets**
  - **Labels - GeoJSON FeatureCollection**
  - **Rendered raster imagery - e.g., byte-scaled RGB**

- **Links**
  - **rel = “source”**
  - **Link to source imagery for creating the labels**

Label Extension Properties


element	type info	name	description
label:property	[string|null]	Name	**REQUIRED** These are the names of the property field(s) in each `Feature` of the label asset's `FeatureCollection` that contains the classes (keywords from `label:classes` if the property defines classes). If labels are rasters, use `null`.
label:classes	Class Object	Classes	**REQUIRED** if using categorical data. A Class Object defining the list of possible class names for each `label:property`. (e.g., tree, building, car, hippo)
label:description	string	Description	**REQUIRED** A description of the label, how it was created, and what it is recommended for
label:type	string	Type	**REQUIRED** An ENUM of either `vector` label type or `raster` label type
label:task	[string]	Task	Recommended to be a subset of 'regression', 'classification', 'detection', or 'segmentation', but may be an arbitrary value
label:method	[string]	Method	Recommended to be a subset of 'automated' or 'manual', but may be an arbitrary value.
label:overview	Label Overview Object	Overview	An Object storing counts (for classification-type data) or summary statistics (for continuous numerical/regression data).

STAC Ecosystem

https://github.com/radiantearth/stac-spec/blob/master/implementations.md

STAC Validator

- Validate any STAC entity (Catalog, Collection, Item)
  - https://github.com/sparkgeo/stac-validator
- Any STAC version
- Service hosted online: https://staclint.com/

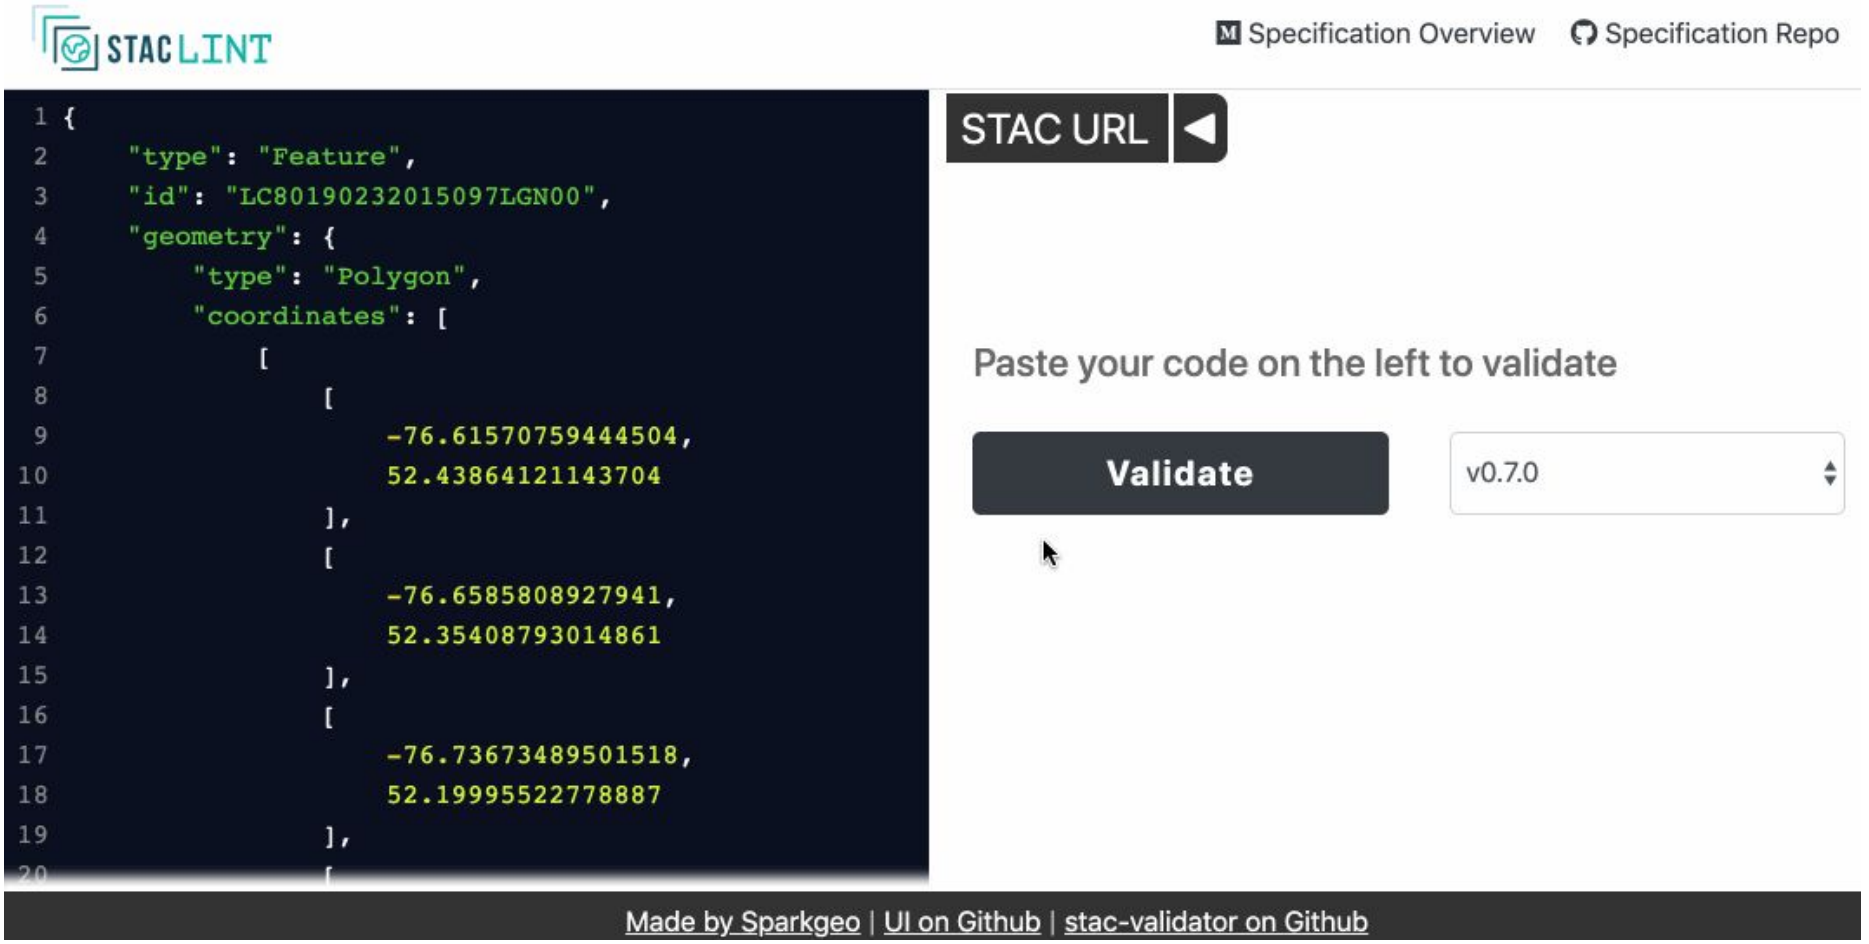
STAC LINT
Specification Overview
Specification Repo
{
"type": "Feature",
"id": "LC80190232015097LGN00",
"geometry": {
"type": "Polygon",
"coordinates": [
[
[
-76.61570759444504,
52.43864121143704
],
[
-76.6585808927941,
52.35408793014861
],
[
-76.73673489501518,
52.19995522778887
],
STAC URL
Paste your code on the left to validate
Validate
v0.7.0
Made by Sparkgeo | UI on Github | stac-validator on Github

STAC Browser

- Browser for navigating static STAC catalogs:
  - https://github.com/radiantearth/stac-browser
- Navigate through Catalogs and Collections, down to Items.

Planet Disaster Data (planet-disaster-data)

Version 1.0.0

https://storage.googleapis.com/pdd-stac/disasters/catalog.json

Planet Disaster Data makes imagery available directly to the public, volunteers, humanitarian organizations, and other coordinating bodies in support of the International Charter for Space and Major Disasters. Data is released for individual disaster events, providing a 30 day window pre- and post-disaster. Imagery is provided under Creative Commons licenses, free of charge, with either CC-BY-SA or CC-BY-NC.

Catalogs

Title
Hurricane Harvey



Provider


Planet Disaster Team <disaster-team@planet.com> *(producer, licensor)*

STAC Version	0.6.0
Keywords	disaster, open
License	CC-BY-SA-4.0
Temporal Extent	8/28/2017, 11:00:00 AM - now

Powered by STAC Browser

QGIS Plugin

- Search for Items in any publicly available STAC catalog
  - https://github.com/kbgg/qgis-stac-browser
- Show footprints of found Items
- Downloading assets of found Items
- Display assets

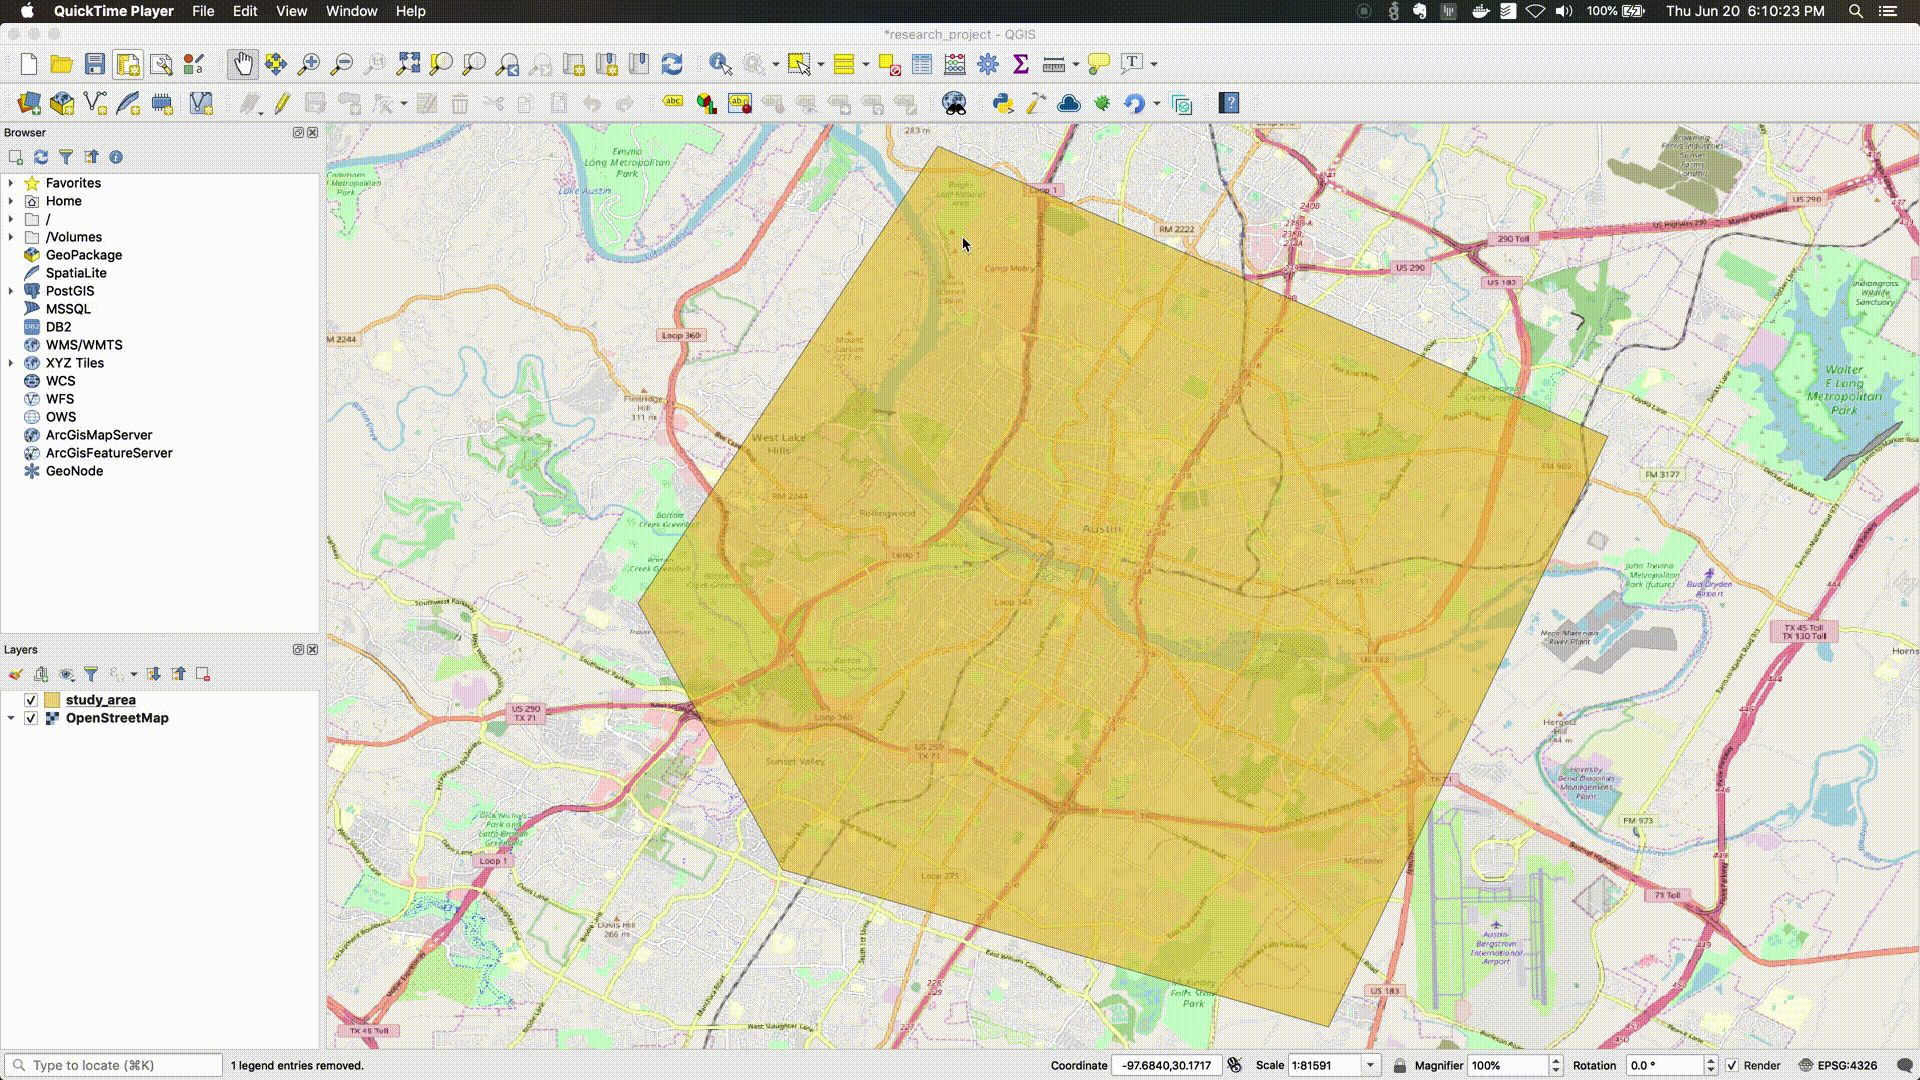
QuickTime Player File Edit View Window Help
100% Thu Jun 20 6:10:23 PM
*research_project - QGIS
Browser
Favorites
Home
/
/Volumes
GeoPackage
SpatiaLite
PostGIS
MSSQL
DB2
WMS/WMTS
XYZ Tiles
WCS
WFS
OWS
ArcGisMapServer
ArcGisFeatureServer
GeoNode
Layers
study_area
OpenStreetMap
Type to locate (⌘K)
1 legend entries removed.
Coordinate -97.6840,30.1717
Scale 1:81591
Magnifier 100%
Rotation 0.0 °
Render
EPSG:4326

sat-utils

https://github.com/sat-utils

sat-api

https://github.com/sat-utils/sat-api

- STAC dynamic API reference implementation
- Node library for a (STAC) API
- Deploy your own API: https://github.com/sat-utils/sat-api-deployment
- Crawl existing static STAC catalogs to index
- Keep up to date by subscribing to STAC SNS topics

https://earth-search.aws.element84.com/stac

+ - View source


```
{
   stac_version: "0.6.2",
   id: "earth-search",
   title: "Earth on AWS STAC API",
   description: "A STAC API powered by sat-api for Earth on AWS datasets by Element 84",
 - links: [
     - {
           rel: "child",
           href: "https://earth-search.aws.element84.com/collections/cbers4-awfi"
       },
     - {
           rel: "child",
           href: "https://earth-search.aws.element84.com/collections/cbers4-pan10m"
       },
     - {
           rel: "child",
           href: "https://earth-search.aws.element84.com/collections/cbers4-mux"
       },
     - {
           rel: "child",
           href: "https://earth-search.aws.element84.com/collections/sentinel-2-l1c"
       },
     - {
           rel: "child",
           href: "https://earth-search.aws.element84.com/collections/landsat-8-l1"
       },
     - {
           rel: "child",
           href: "https://earth-search.aws.element84.com/collections/cbers4-pan5m"
       },
     - {
           rel: "self",
           href: "https://earth-search.aws.element84.com/stac"
       }
   ]
}
```


links

sat-stac

https://github.com/sat-utils/sat-stac

- Python library for creating or working with STAC catalogs, collections, and items
- Used for creating existing catalogs, such as
  - https://landsat.stac.cloud
  - https://sentinel.stac.cloud
  - http://cbers.stac.cloud/
- See the Jupyter Notebook tutorials

sat-stac-landsat

https://github.com/sat-utils/sat-stac-landsat

- Indexes Landsat-8 scenes on AWS
- Transform Landsat metadata to STAC (MTL -> STAC)
- Deployed Lambda function for real-time publishing of new Landsat scenes
    - SNS message with entire STAC Item
    - See repo for SNS Topic ARN

sat-stac-sentinel

https://github.com/sat-utils/sat-stac-sentinel

- Sentinel-2(a/b), Sentinel-1 coming
- Index Sentinel scenes on AWS
- Transform Sentinel metadata to STAC (tileInfo.json -> STAC)
- Deployed Lambda function for real-time publishing new Sentinel scenes
    - SNS message with entire STAC Item
    - See repo for SNS Topic ARN

sat-search

https://github.com/sat-utils/sat-search

- Python library for searching STAC complaint endpoints
- Command Line Interface (CLI) as a general purpose tool
- Save search results to be loaded and used later
- Download specific assets from all items
- Specify specific band colors to download those bands
    - e.g., Download all “red” and “nir” bands from these Landsat and Sentinel Items


```
$ sat-search search --intersects maine.geojson --found
1674 items found
$ clear
```

sat-fetch

https://github.com/sat-utils/sat-fetch

- Works just like sat-search, plus...
- Option to fetch imagery for just AOIs, rather than the entire asset
- Requires GDAL, or use publicly available Docker image


Ngorongoro crater: landsat-8 and sentinel-2

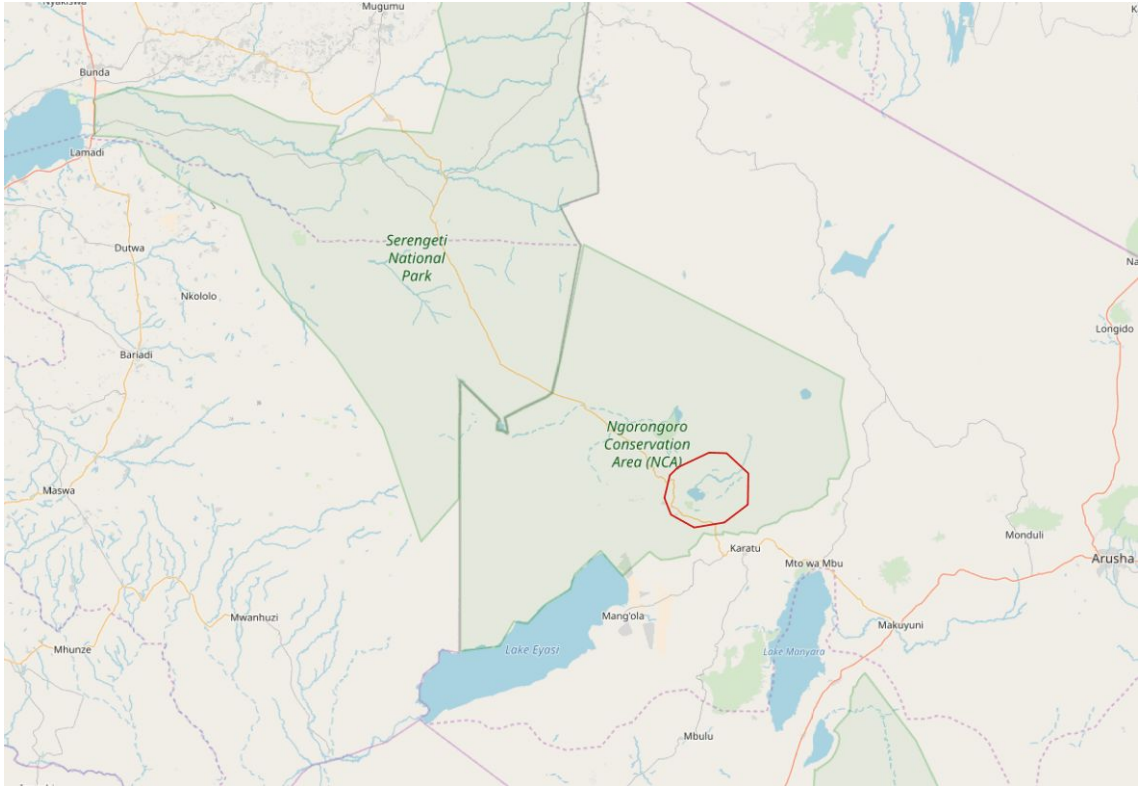


Ngorongoro crater: landsat-8 scenes

```
sat-search search
    \ --intersects ngorongoro.geojson --eo:cloud_cover 0/5 \
    -c landsat-8-l1 --save landsat-scenes.geojson \
    --print_md date eo:cloud_cover id
```

```
2014-12-11  5  LC08_L1TP_169062_20141211_20170416_01
2015-01-28  1  LC08_L1TP_169062_20150128_20170413_01
2015-02-13  0  LC08_L1TP_169062_20150213_20170413_01
2015-08-24  2  LC08_L1TP_169062_20150824_20170405_01
2015-09-09  1  LC08_L1TP_169062_20150909_20170404_01
2015-12-30  0  LC08_L1TP_169062_20151230_20170331_01
2016-02-16  0  LC08_L1TP_169062_20160216_20180526_01
2016-08-10  2  LC08_L1TP_169062_20160810_20170322_01
2016-10-13  0  LC08_L1TP_169062_20161013_20180526_01
2016-10-29  3  LC08_L1TP_169062_20161029_20170319_01
2017-01-17  0  LC08_L1TP_169062_20170117_20170311_01
2017-11-17  2  LC08_L1TP_169062_20171117_20171122_01
2018-02-05  0  LC08_L1TP_169062_20180205_20180221_01
2018-05-28  3  LC08_L1TP_169062_20180528_20180605_01
18 scenes found
```

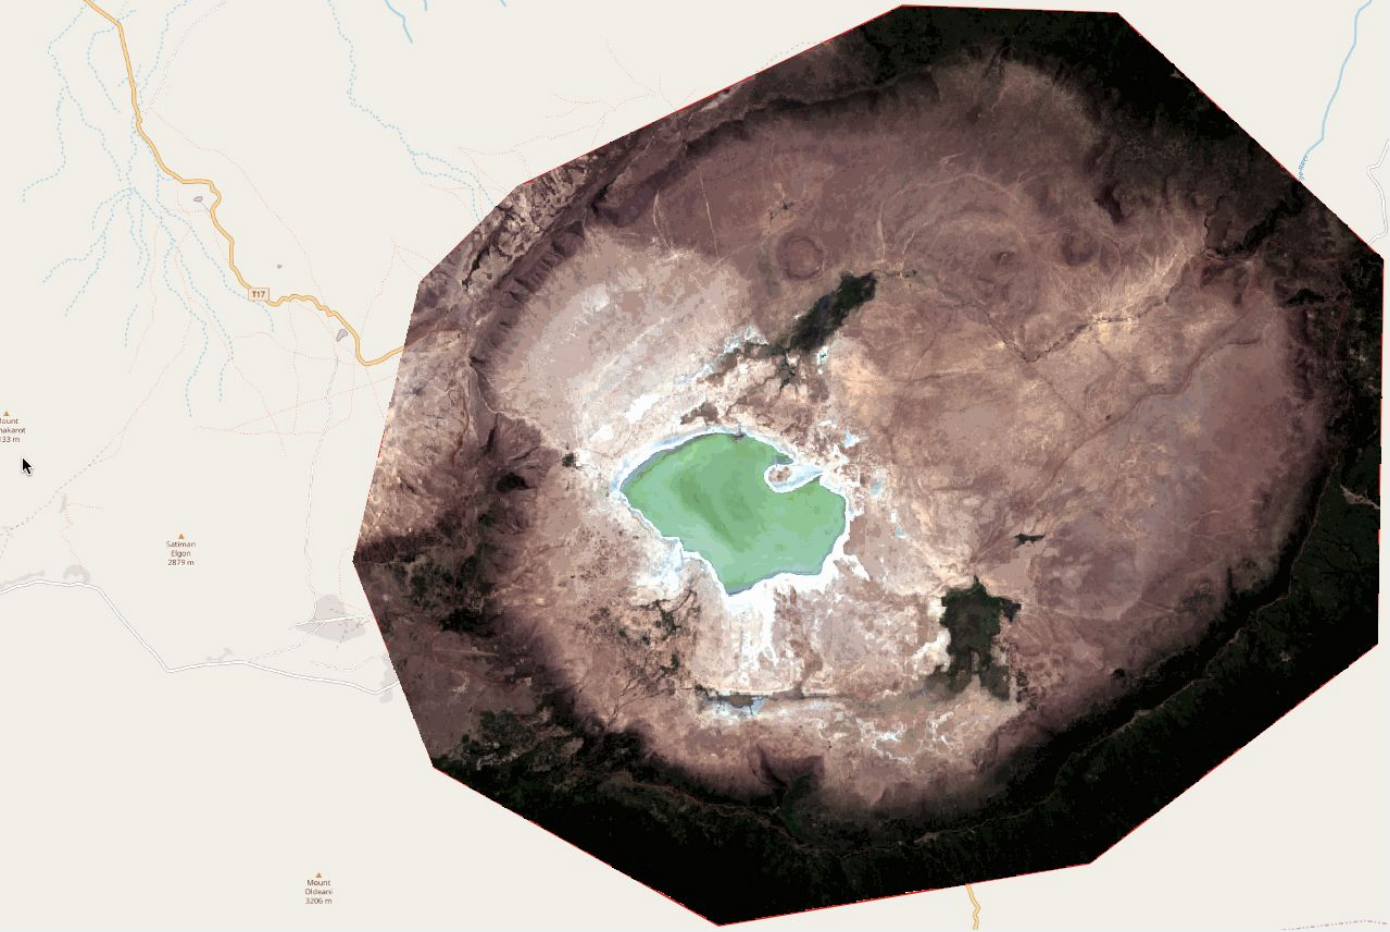


```
$ time sat-fetch load landsat-scenes.geojson \
    --download red green blue
real 0m59.674s
```

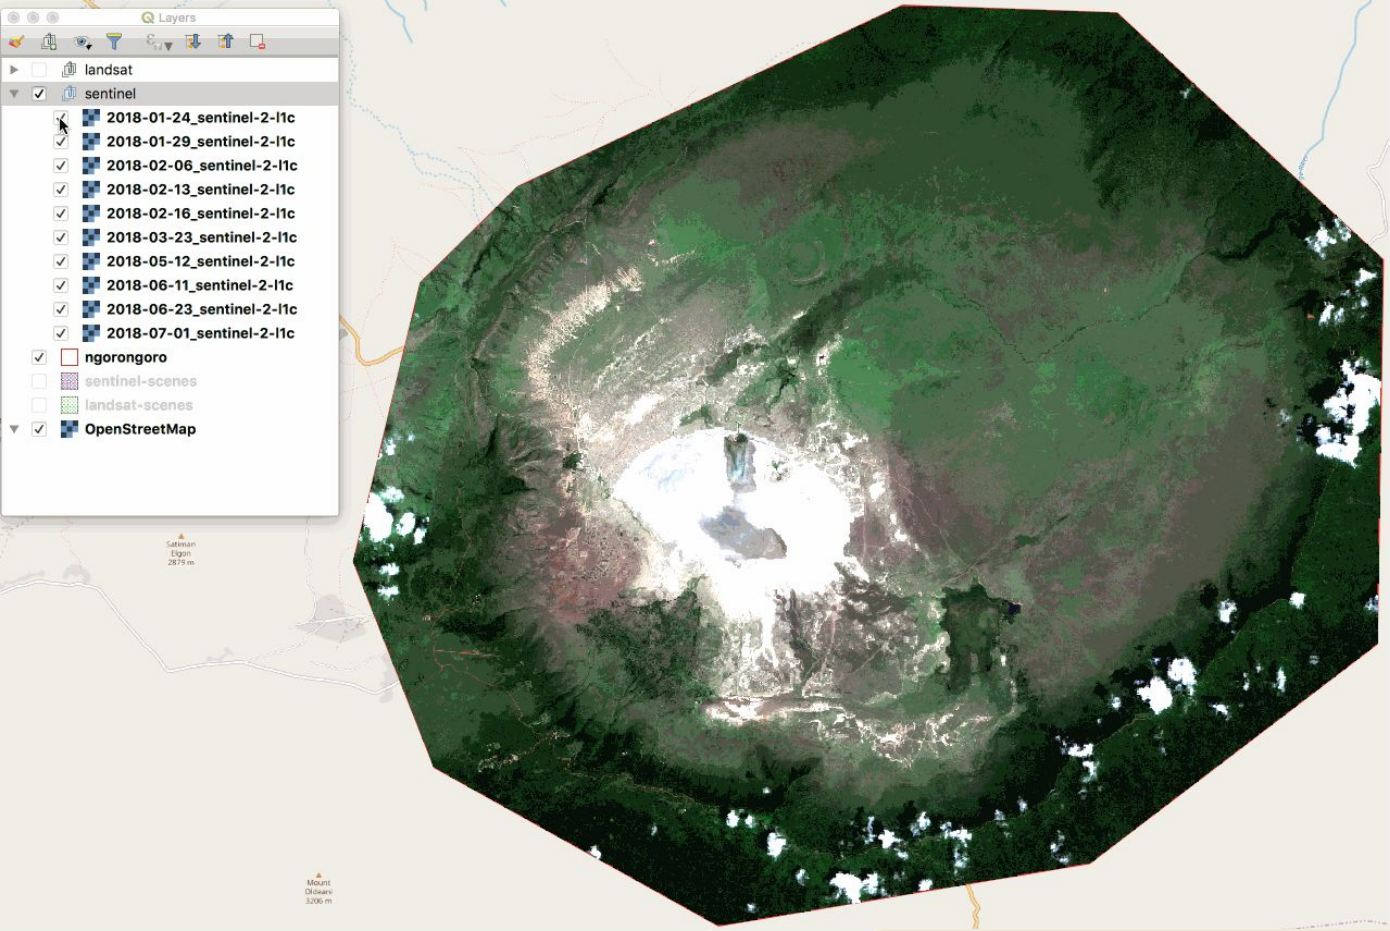


```
$ time sat-fetch load sentinel-scenes.geojson \
    --download red green blue
real 8m6.525s
```

sat-api-browser

https://github.com/sat-utils/sat-api-browser

- Initial prototype
- Web-based UI for searching and saving results from STAC APIs
- Works with any STAC compliant API

SAT-API Browser

BUILD QUERY | RESULTS | CANDIDATES

Date Range

Start Date (required): 2019/07/14 06:33 PM

End Date (required): 2019/07/15 06:33 PM

Area Of Interest (required)

DRAW BBOX ON MAP

Property Filters

Add new filter

Select a property to filter

SUBMIT QUERY



intake-stac

https://github.com/pangeo-data/intake-stac


- Pangeo - http://pangeo.io/
- Plugin to Intake
- Turn STAC Item Assets into Dask arrays
- Dynamic multi-threaded processing of STAC assets

E84 Earth Search

https://earth-search.aws.element84.com/stac

Public Search and Discovery API for Earth on AWS Datasets

- Central search catalog and standardized metadata
- Single API that allows searching of STAC metadata for all Earth on AWS datasets
- Powered by sat-api (https://github.com/sat-utils/sat-api)
- Backed by an ElasticSearch index
- Proposed initial datasets
  - Sentinel-1
  - Sentinel-2
  - CBERS-4
  - Landsat-8
  - NAIP

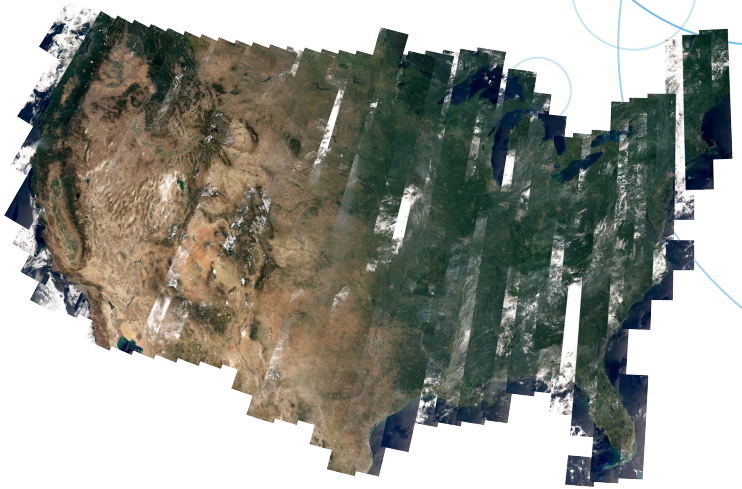

Landsat-8

Landsat is perhaps one of the most oft-cited and used EO datasets because of its historical archive (Landsat-8 was launched in 2013, but the entire Landsat archive goes back to 1982, with some caveats).

STAC challenges

- Underlying data representation is critical to vision of STAC use cases
- Record versioning
- Static catalog maintenance (e.g. removal, updates, etc.)
  - Currently dealing with this as using a DB or ElasticSearch and then periodically exporting the static catalog.
- Dealing with different types of remote sensing data
  - Currently dealing with this through extensions (e.g. EO, SAR, Drones, Labels)
  - Problem is there is overlap in these extensions - don't have a good way to share fields and provide validation.

How can you be part of this?

USE STAC!

- Use the tools - provide feedback!
- Use STAC metadata - provide feedback!

- If you're an expert in a data type:
  - Provide input on the extensions
  - If we don't have an extension for, help write it

Thank you

Element 84