

Beer Preferences for Thursday Night Football: A Balanced Incomplete Block Design Experiment

Matthew Murnane

Ethan Newcomb

Abstract

Introduction

Methods


Results

Table 1: Beer Ratings by Participant

Beers	Nolan	Jon	Beni	Zach	Row Means
Sierra(Pale_ale)	NA	5.5	7	2.5	5.00
Coors(Generic)	6	6	NA	6.5	6.17
Guinness(Dark)	5.5	3.5	4	NA	4.33
Pliny(IPA)	3	NA	8.5	2	4.50
Mean	4.83	5	6.5	3.67	NA

```
raw_data_with_means
```

```
      beers Nolan  Jon Beni Zach Row_Mean
1 Sierra(Pale_ale) <NA> 5.5  7  2.5    5.00
2   Coors(Generic)    6   6 <NA>  6.5    6.17
3  Guinness(Dark)  5.5 3.5  4 <NA>    4.33
4    Pliny(IPA)    3 <NA> 8.5  2    4.50
5          Mean 4.83  5  6.5 3.67    NA
```

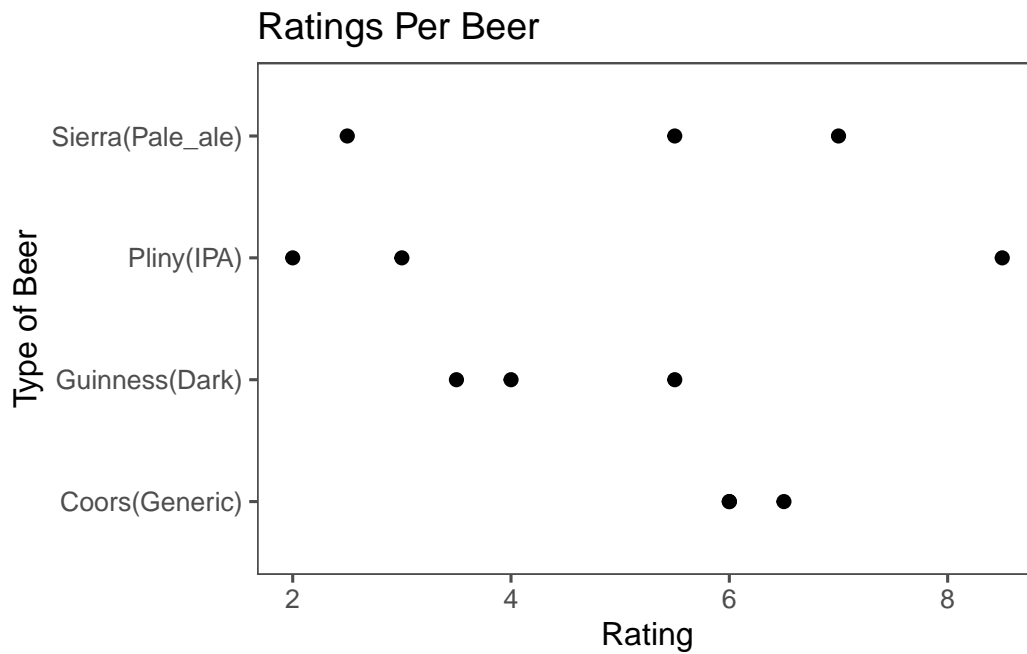

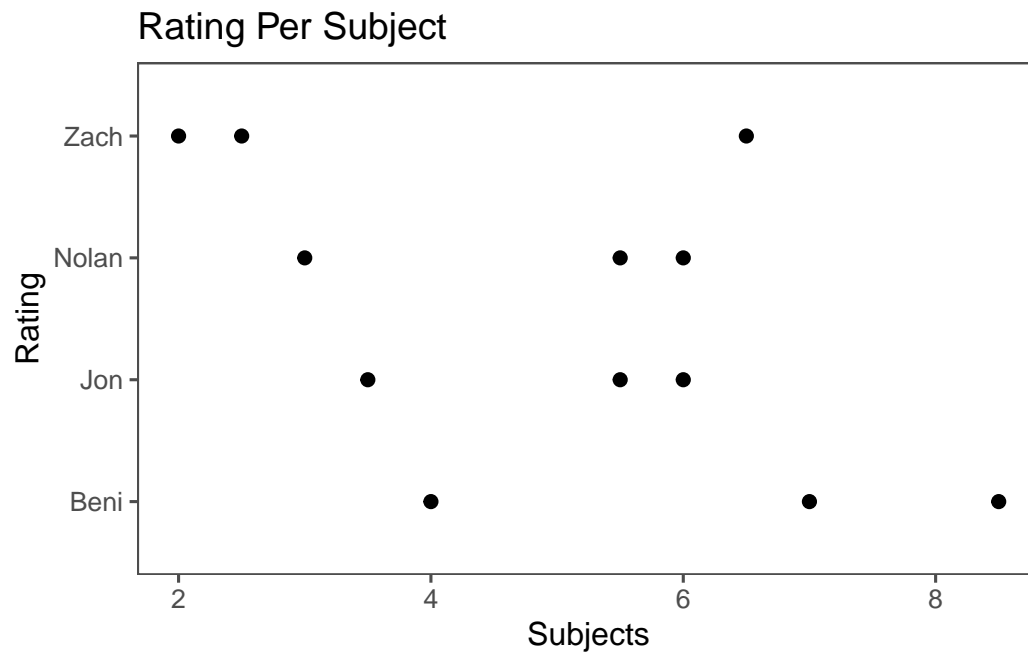


Table 2: ANOVA Table for Linear Model

	Df	Sum Sq	Mean Sq	F value	Pr(>F)
names	3	12.16667	4.055556	1.197212	0.4001761
beers	3	14.39583	4.798611	1.416564	0.3414684
Residuals	5	16.93750	3.387500	NA	NA

Conclusion

Appendix

Code Used

Libraries Used

```
library(tidyverse)
library(ggthemes)
library(tidyr)
library(knitr)
```

Data Code

```
# Data input
beers <- c("Sierra(Pale_ale)", "Coors(Generic)", "Guinness(Dark)", "Pliny(IPA)")
Nolan <- c(NA, 6, 5.5, 3)
Jon <- c(5.5, 6, 3.5, NA)
Benni <- c(7, NA, 4, 8.5)
Zach <- c(2.5, 6.5, NA, 2)

raw_data <- data.frame(beers, Nolan, Jon, Benni, Zach)

# Data Cleaning

pivoted_raw_data <- pivot_longer(raw_data,
                                cols=-beers,
                                names_to = "names",
                                values_to = "rating")

cleaned_data <- pivoted_raw_data %>%
  drop_na(rating)

#Table
col_means <- round(colMeans(raw_data[, -1], na.rm = TRUE), 2)

raw_data_with_col_means <- rbind(raw_data, c("Mean", col_means))

row_means <- round(apply(raw_data[, -1], 1, mean, na.rm = TRUE), 2)

raw_data_with_means <- cbind(raw_data_with_col_means, Row_Mean = c(row_means, NA))
```



```

raw_data_with_means %>%
  kable(
    caption = "Beer Ratings by Participant",
    col.names = c("Beers", "Nolan", "Jon", "Beni", "Zach", "Row Means"),
    align = "c"
  )

```

Plots

Code for Plot 1 {.anchor #plot1}

```

cleaned_data %>%
  ggplot(aes(x = rating,
             y = beers))+
  geom_point(size = 2)+
  theme_few()+
  ggtitle("Ratings Per Beer")+
  ylab("Type of Beer")+
  xlab("Rating")

```

```

cleaned_data %>%
  ggplot(aes(x = rating,
             y = names))+
  geom_point(size = 2)+
  theme_few()+
  ggtitle("Rating Per Subject")+
  xlab("Subjects")+
  ylab("Rating")

```