


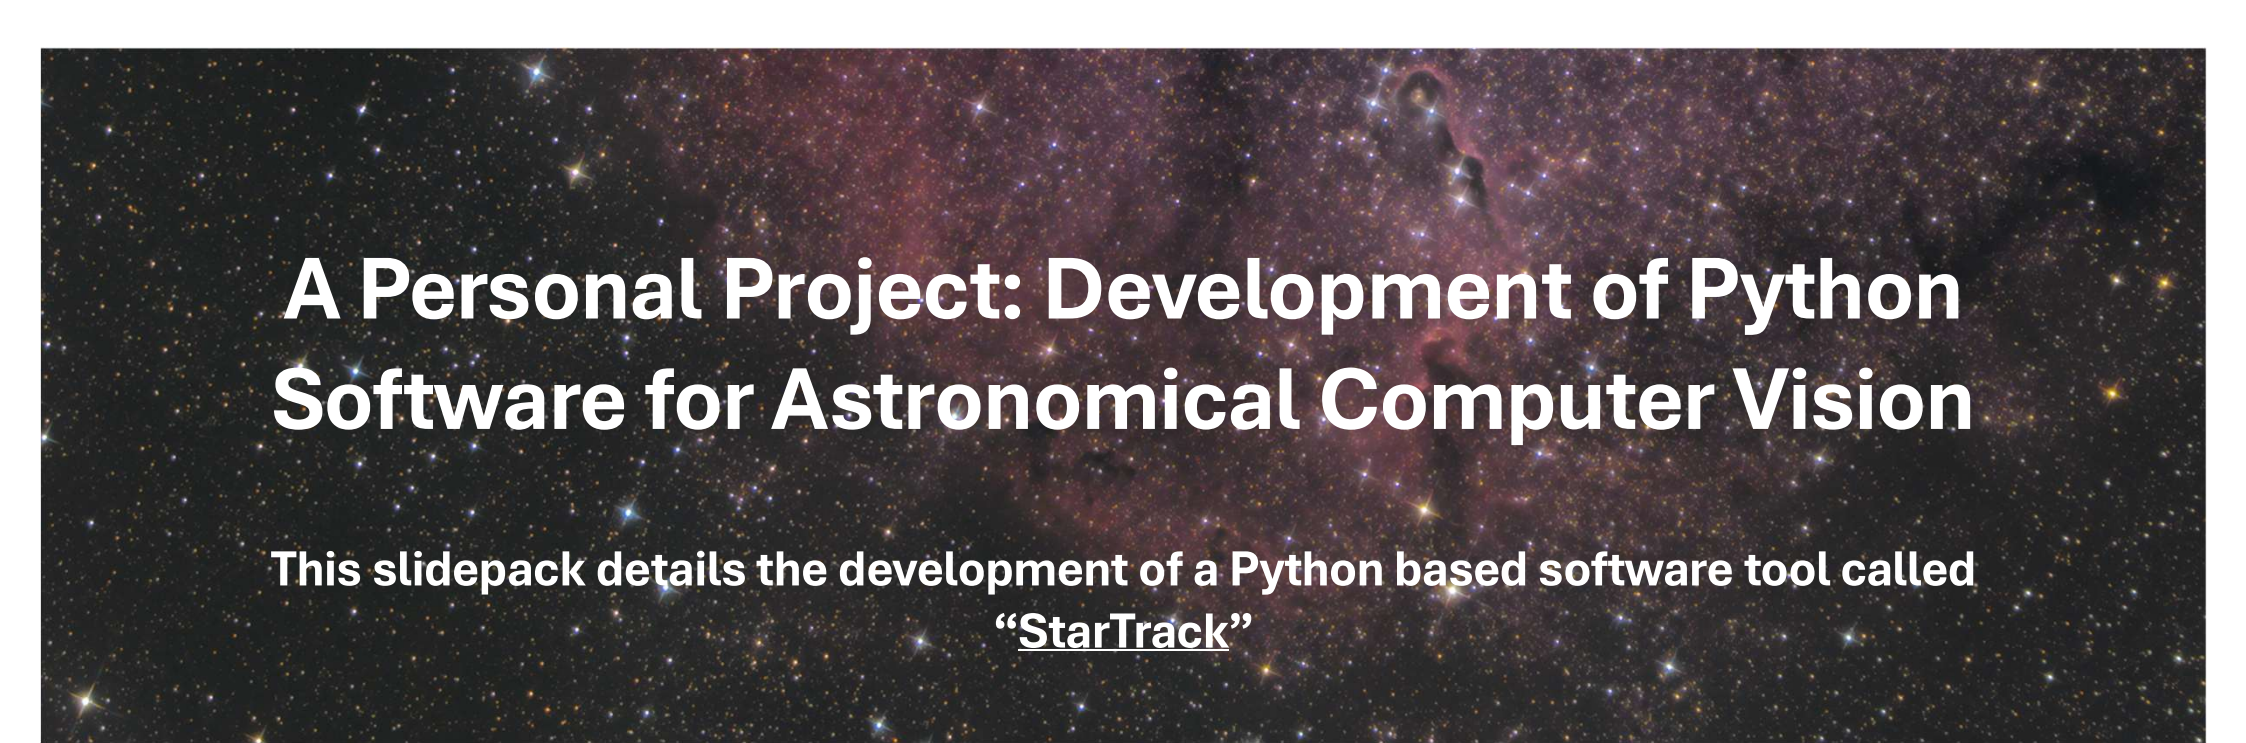

A Personal Project: Development of Python Software for Astronomical Computer Vision

This slidepack details the development of a Python based software tool called “StarTrack”

See more here! <https://github.com/matthiasarndt/StarTrack>


By Matthias Arndt

Contents:

- 1 : What is StarTrack?
- 2 : Which software methods have been implemented?
- 3: Why develop it?
- 4: Examples of Noise Reduction for Various Deep Space Objects
- 5: How is the Astronomical data captured?
- 6: Future Roadmap
- 7: Results Showcase

StarTrack is a modular object-oriented Python package designed for astronomical Computer Vision, star detection, and noise reduction.

- See here:
<https://github.com/matthiasarndt/StarTrack>
- I have developed this code independently outside of my current engineering role, as a passion project driven by my interest in **software development, numerical modelling, and Astronomy**.
- StarTrack has been built to combine hundreds of individual images of a **Deep Space Object** (often 10s of millions of light years away), detecting and identifying stars and using them to align, layer and combine their data to reduce noise and reveal extremely faint objects!

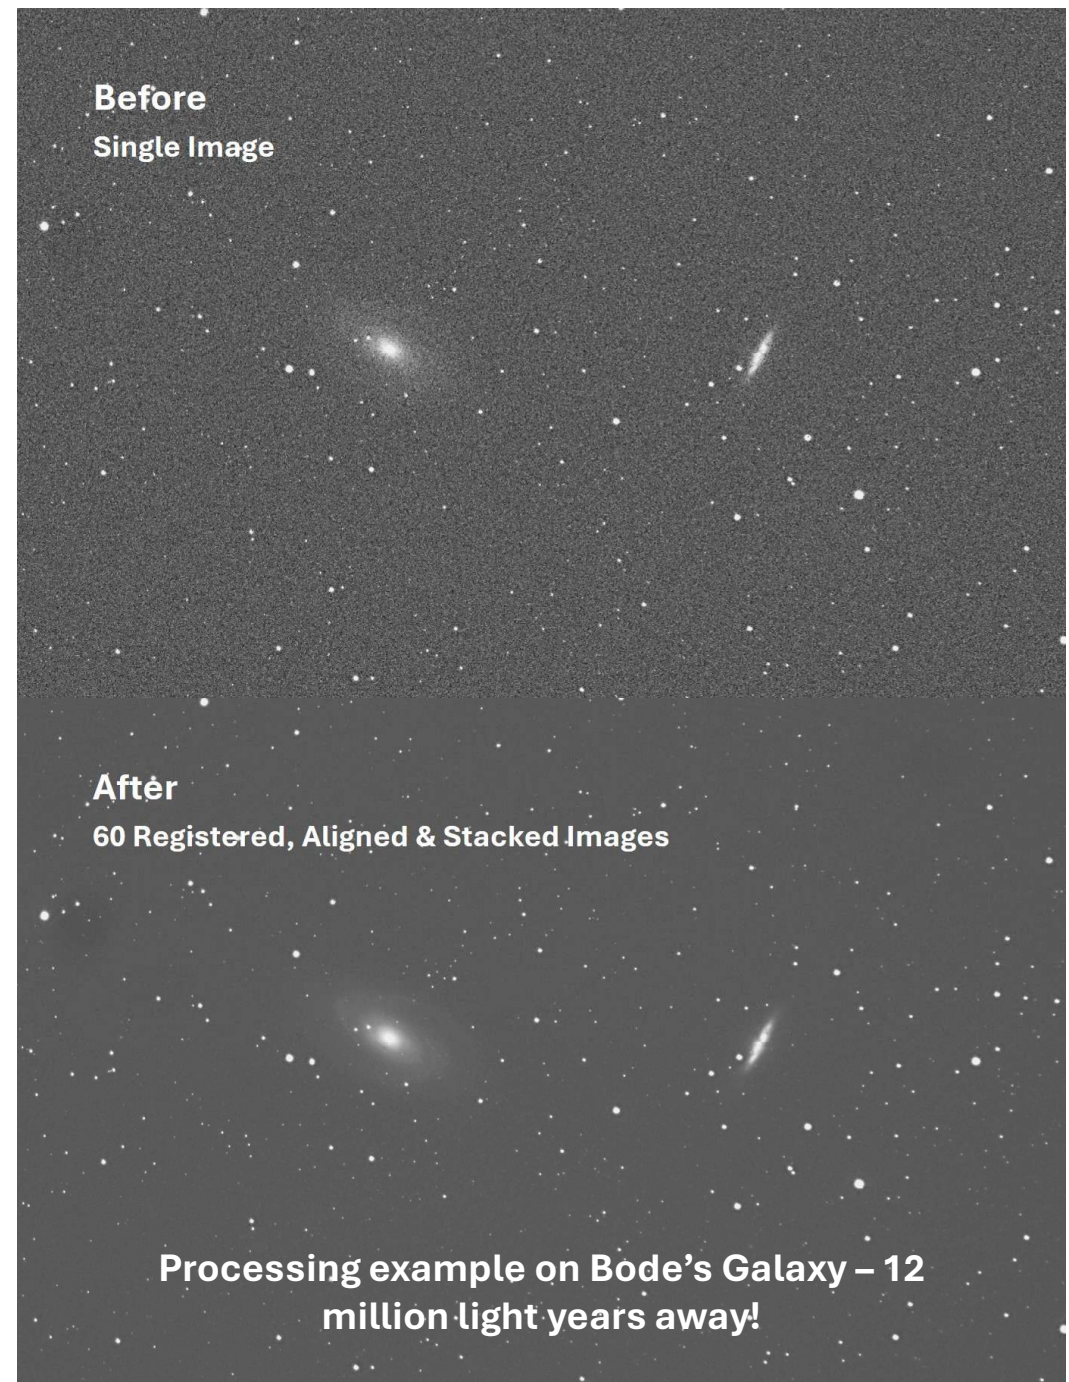

StarTrack has been built without any Computer Vision libraries (such as OpenCV), instead relying on algorithms derived from scratch, written with NumPy, SciPy and scikit-learn. The following technologies have been implemented:

- Object-Oriented Programming, Design Patterns (Pipeline), Inheritance & Composition
- Unsupervised Machine Learning (sci-kit learn), to detect, register, and classify stars and Astronomical features.
- Vectorised numerical methods and algorithms implemented with NumPy.
- Optimisation techniques (SciPy), used to automatically tune Image Processing parameters to allow the code to work across a large range of different image datasets.
- Dataclasses, to ensure a traceable flow of data and immutable inputs.
- Parallelisation and memory management to rapidly increase processing times and reduce RAM overhead.
- Code optimisation to reduce overall runtime.
- Regular version controlling with Git onto GitHub



Why build StarTrack? The biggest challenge in Deep Space Astronomy imaging is noise reduction.

- Many nebulae, galaxies and star clusters are extremely dim, and therefore long exposures are required to adequately capture their detail.
- Due to the Earth's rotation, it is necessary for imaging systems to track objects in the night sky.
- As tracking errors build up, drift becomes visible in captured images. Drift can cause stars to become distorted and for images to lose depth and clarity.

To overcome this, hundreds of individual images are taken of a single object, with each being exposed for a few minutes.

- These images are then "stacked" on top of each other to reduce the noise of the final stacked image – thereby providing the equivalent of one very long exposure.
- StarTrack is built to combine hundreds of individual exposures of astronomical data. It does this by running star detection algorithms, and identifying reference points across many frames, and aligning them.
- Using this information, it can "stack" these exposures together – identifying and averaging every pixel in each individual frame to produce a stacked exposure which has a large reduction in noise.

StarTrack works on a large variety of Astronomical Objects:

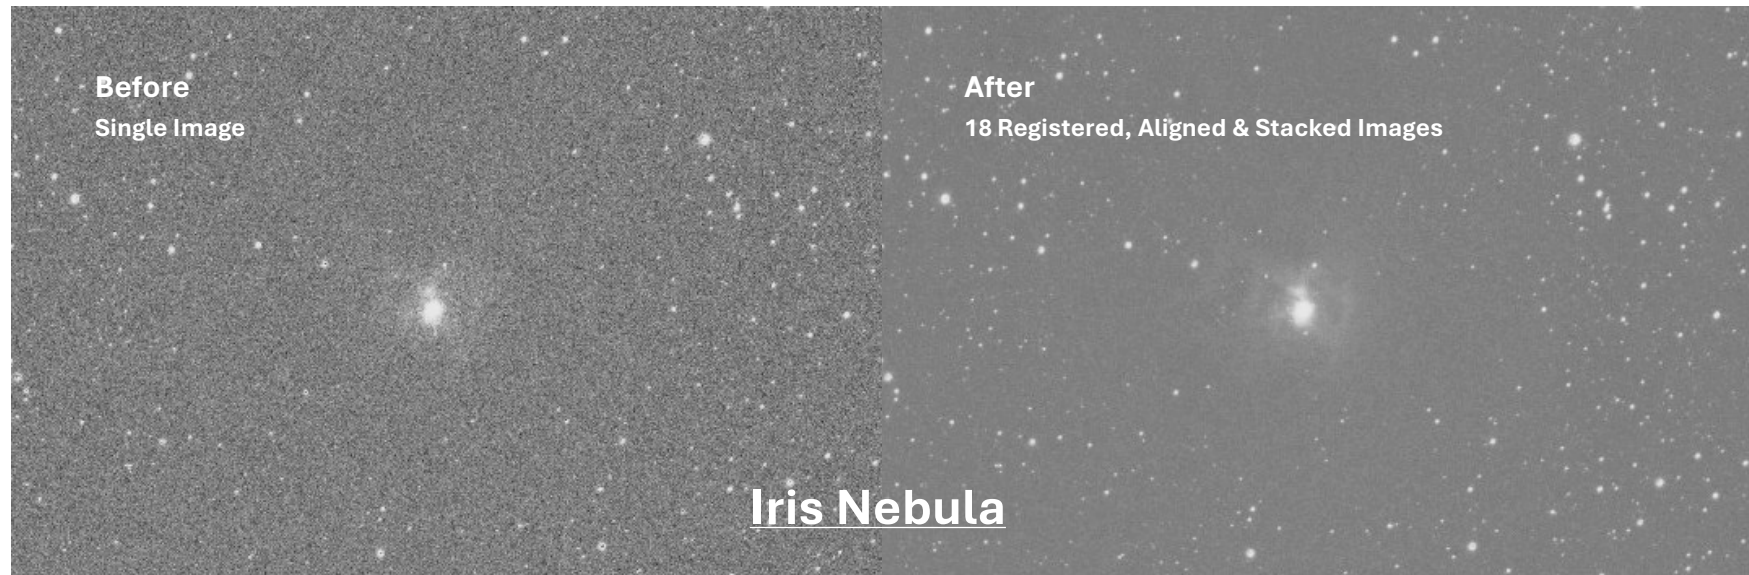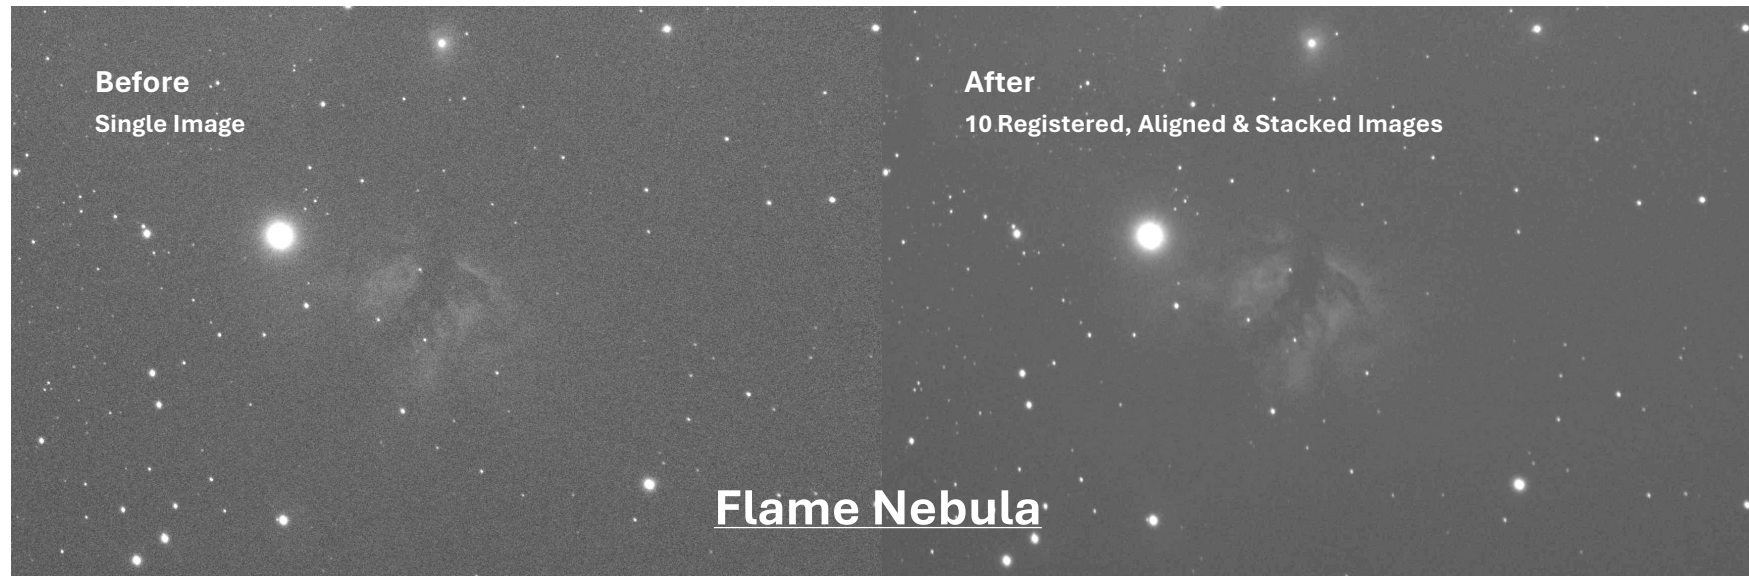


To read more about how StarTrack works, please see here:

<https://github.com/matthiasarndt/StarTrack/blob/main/README.md>

Processing is split into three key steps:

1. **Light Frame Processing:** All frames are imported and read in as LightFrame objects. These are processed to filter, count, and catalogue aligning stars inside an image.
2. **Frame Alignment:** Each of the frames (on the order of 10s-100s of images) are aligned with the reference frame, which is the initial frame that all other layers are compared against. This involves calculating reference vectors for each image and warping/translating the data to match the reference frame.
3. **Stacking:** As a result of frame alignment, a 3D array of data is created, where each layer represents one input frame which has been rotated/translated to match the reference frame. Data at each pixel co-ordinate are assessed and averaged to reduce noise and remove outliers.

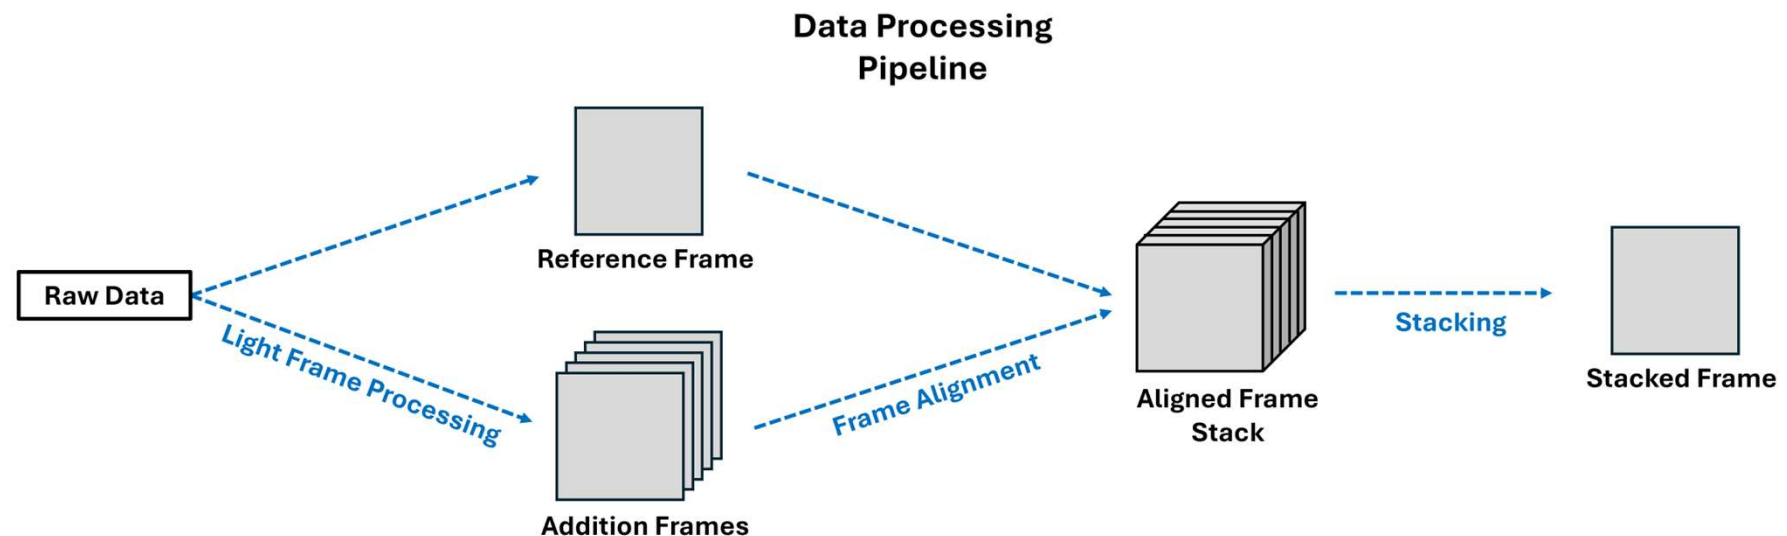

Astronomical Image Datasets have been captured manually, using an Apochromatic Refractor on a motorised mount:

- An apochromatic refractor telescope with a focal length of 360mm and a focal ratio of 5.8.
- A mount which can track the night sky in the Right Ascension (RA) axis.
- A Nikon DSLR which has been modified to increase sensitivity to Hydrogen Alpha wavelengths.
- See here for more:
<https://github.com/matthiasarndt/Astrophotography/blob/main/README.md>



StarTrack is currently under active development! The following is a roadmap for future planned features and technologies:

1. Further optimisation of existing codebase, with benchmarking for memory usage and time taken for each process to run.
2. The addition of RGB processing capabilities.
3. Implementation of post-processing capabilities for final stacked images (e.g. edge detection of nebulae, and dynamic range increases to bring out features of deep space objects).
4. Machine Learning of final stacked image to further reduce noise using PyTorch. The aim here will be to use deep learning (Variational Autoencoders – VAE) to further reduce noise.
5. Statistical analysis of pixels in each layer before they are “stacked” together. This will involve understanding the distribution of each pixel and using statistical approaches to remove noise and increase signal to noise ratio.
6. GPU based computing to accelerate a lot of the algorithms which are currently CPU based. This will involve refactoring code to run off CuPy rather than NumPy or implementing computing with Numba.