

DYMO Developer SDK Support Blog

FOR DEVELOPERS USING DYMO SOFTWARE DEVELOPMENT KITS

Search


Mar 24 2010

Understanding Label File Formats in DYMO Label v.8 – Label Objects

 SDK Samples  21 Responses »

In a [previous post](#) we looked at the new label file format used by DYMO Label v.8 software (DLS) from a bird's eye view. Now it's a time to look a little closer. The most important thing in a label file are label objects. Label objects contain data and formatting properties and define the label's content. All object types and most of their properties are available through the DLS UI and are pretty straightforward. In this post we will briefly describe all label objects and will look at most important properties as well as at properties not available through the UI.

Let's look at this label file. It contains all the different object types supported by DLS. If you open the label in DLS it will look like this:

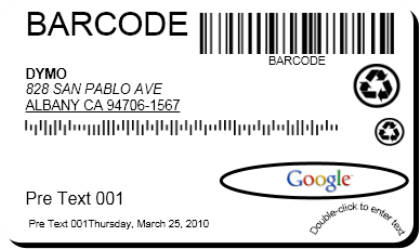

Listing 1: UnderstandingLabelFileFormat-AllObjects.label

```
001 <?xml version="1.0" encoding="utf-8"?>
002 <DieCutLabel Version="8.0" Units="twips">
003   <PaperOrientation>Landscape</PaperOrientation>
004   <Id>LargeShipping</Id>
005   <PaperName>30256 Shipping</PaperName>
006   <DrawCommands>
007     <RoundRectangle X="0" Y="0" Width="3331" Height="5715" Rx="270" Ry="270" />
008   </DrawCommands>
009   <ObjectInfo>
010     <TextObject>
011       <Name>BarcodeText</Name>
012       <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
013       <BackColor Alpha="0" Red="255" Green="255" Blue="255" />
014       <LinkedObjectName></LinkedObjectName>
015       <Rotation>Rotation0</Rotation>
016       <IsMirrored>False</IsMirrored>
017       <IsVariable>False</IsVariable>
018       <HorizontalAlignment>Left</HorizontalAlignment>
019       <VerticalAlignment>Top</VerticalAlignment>
020       <TextFitMode>AlwaysFit</TextFitMode>
021       <UseFullFontHeight>False</UseFullFontHeight>
022       <Verticalized>False</Verticalized>
023       <StyledText>
024         <Element>
025           <String>BARCODE</String>
026           <Attributes>
027             <Font Family="Arial" Size="12" Bold="False" Italic="False"
028               Underline="False" Strikeout="False" />
029             <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
030           </Attributes>
031         </Element>
032       </StyledText>
033     </TextObject>
034     <Bounds X="336" Y="132.900024414063" Width="2265" Height="345" />
035   </ObjectInfo>
036   <ObjectInfo>
037     <ShapeObject>
038       <Name>Shape</Name>
039       <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
040       <BackColor Alpha="0" Red="255" Green="255" Blue="255" />
041       <LinkedObjectName></LinkedObjectName>
042       <Rotation>Rotation0</Rotation>
043       <IsMirrored>False</IsMirrored>
044       <IsVariable>False</IsVariable>
045       <ShapeType>Ellipse</ShapeType>
046       <LineWidth>45</LineWidth>
047       <LineAlignment>Center</LineAlignment>
048       <FillColor Alpha="0" Red="255" Green="255" Blue="255" />
049     </ShapeObject>
050     <Bounds X="3004" Y="2187.89990234375" Width="2670" Height="570" />
051   </ObjectInfo>
052   <ObjectInfo>
053     <AddressObject>
054       <Name>Address</Name>
055       <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
056       <BackColor Alpha="0" Red="255" Green="255" Blue="255" />
057       <LinkedObjectName></LinkedObjectName>
058       <Rotation>Rotation0</Rotation>
059       <IsMirrored>False</IsMirrored>
060       <IsVariable>True</IsVariable>
061       <HorizontalAlignment>Left</HorizontalAlignment>
062       <VerticalAlignment>Top</VerticalAlignment>
063       <TextFitMode>ShrinkToFit</TextFitMode>
064       <UseFullFontHeight>True</UseFullFontHeight>
065       <Verticalized>False</Verticalized>
066       <StyledText>
067         <Element>
068           <String>DYMO
069 </String>
```

```
<Attributes>
  <Font Family="Arial" Size="12" Bold="True" Italic="False"
    Underline="False" Strikeout="False" />
  <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
</Attributes>
</Element>
<Element>
  <String>828 SAN PABLO AVE
</String>
  <Attributes>
    <Font Family="Arial" Size="12" Bold="False" Italic="True"
      Underline="False" Strikeout="False" />
    <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
  </Attributes>
</Element>
<Element>
  <String>ALBANY CA 94706-1567</String>
  <Attributes>
    <Font Family="Arial" Size="12" Bold="False" Italic="False"
      Underline="True" Strikeout="False" />
    <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
  </Attributes>
</Element>
</StyledText>
<ShowBarcodeFor9DigitZipOnly>True</ShowBarcodeFor9DigitZipOnly>
<BarcodePosition>BelowAddress</BarcodePosition>
<LineFonts>
  <Font Family="Arial" Size="12" Bold="True" Italic="False"
    Underline="False" Strikeout="False" />
  <Font Family="Arial" Size="12" Bold="False" Italic="True"
    Underline="False" Strikeout="False" />
  <Font Family="Arial" Size="12" Bold="False" Italic="False"
    Underline="True" Strikeout="False" />
</LineFonts>
</AddressObject>
<Bounds X="336" Y="885" Width="4380" Height="960" />
</ObjectInfo>
<ObjectInfo>
  <CircularTextObject>
    <Name>CURVED-TEXT</Name>
    <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
    <BackColor Alpha="0" Red="255" Green="255" Blue="255" />
    <LinkedObjectName></LinkedObjectName>
    <Rotation>Rotation0</Rotation>
    <IsMirrored>False</IsMirrored>
    <IsVariable>False</IsVariable>
    <Text>Double-click to enter text</Text>
    <Font Family="Arial" Size="12" Bold="False" Italic="False" Underline="False"
      Strikeout="False" />
    <StartAngle>0</StartAngle>
    <Mode>ArcTextTop</Mode>
    <CircleAlignment>CenterAtTop</CircleAlignment>
    <TextAlignment>Center</TextAlignment>
    <VerticalAlignment>Middle</VerticalAlignment>
  </CircularTextObject>
  <Bounds X="4204" Y="2739" Width="1470" Height="510" />
</ObjectInfo>
<ObjectInfo>
  <BarcodeObject>
    <Name>Barcode</Name>
    <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
    <BackColor Alpha="0" Red="255" Green="255" Blue="255" />
    <LinkedObjectName>BarcodeText</LinkedObjectName>
    <Rotation>Rotation0</Rotation>
    <IsMirrored>False</IsMirrored>
    <IsVariable>True</IsVariable>
    <Text>BARCODE</Text>
    <Type>Code128Auto</Type>
    <Size>Medium</Size>
    <TextPosition>Bottom</TextPosition>
    <TextFont Family="Arial" Size="8" Bold="False" Italic="False"
      Underline="False" Strikeout="False" />
    <ChecksumFont Family="Arial" Size="8" Bold="False" Italic="False"
      Underline="False" Strikeout="False" />
    <TextEmbedding>None</TextEmbedding>
    <ECLevel>0</ECLevel>
    <HorizontalAlignment>Center</HorizontalAlignment>
    <QuietZonesPadding Left="0" Top="0" Right="0" Bottom="0" />
  </BarcodeObject>
  <Bounds X="2524" Y="150" Width="3150" Height="720" />
</ObjectInfo>
<ObjectInfo>
  <DateTimeObject>
    <Name>DateTime</Name>
    <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
    <BackColor Alpha="0" Red="255" Green="255" Blue="255" />
    <LinkedObjectName>Counter</LinkedObjectName>
    <Rotation>Rotation0</Rotation>
    <IsMirrored>False</IsMirrored>
    <IsVariable>False</IsVariable>
    <HorizontalAlignment>Left</HorizontalAlignment>
    <VerticalAlignment>Top</VerticalAlignment>
    <TextFitMode>ShrinkToFit</TextFitMode>
    <UseFullFontHeight>True</UseFullFontHeight>
    <Verticalized>False</Verticalized>
    <DateTimeFormat>WeekdayLongMonthDayLongYear</DateTimeFormat>
    <Font Family="Arial" Size="12" Bold="False" Italic="False" Underline="False"
      Strikeout="False" />
    <PreText>Pre Text 001</PreText>
    <PostText></PostText>
    <IncludeTime>False</IncludeTime>
    <Use24HourFormat>False</Use24HourFormat>
  </DateTimeObject>
  <Bounds X="381" Y="2982.89990234375" Width="2880" Height="165" />
</ObjectInfo>
<ObjectInfo>
  <CounterObject>
    <Name>Counter</Name>
    <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
    <BackColor Alpha="0" Red="255" Green="255" Blue="255" />
    <LinkedObjectName></LinkedObjectName>
    <Rotation>Rotation0</Rotation>
    <IsMirrored>False</IsMirrored>
    <IsVariable>False</IsVariable>
    <HorizontalAlignment>Left</HorizontalAlignment>
    <VerticalAlignment>Top</VerticalAlignment>
    <TextFitMode>ShrinkToFit</TextFitMode>
  </CounterObject>
  <Name>Counter</Name>
  <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
  <BackColor Alpha="0" Red="255" Green="255" Blue="255" />
  <LinkedObjectName></LinkedObjectName>
  <Rotation>Rotation0</Rotation>
  <IsMirrored>False</IsMirrored>
  <IsVariable>False</IsVariable>
  <HorizontalAlignment>Left</HorizontalAlignment>
  <VerticalAlignment>Top</VerticalAlignment>
  <TextFitMode>ShrinkToFit</TextFitMode>
</CounterObject>
```

```
187         <UseFullFontHeight>True</UseFullFontHeight>
188         <Verticalized>False</Verticalized>
189         <Font Family="Arial" Size="12" Bold="False" Italic="False" Underline="False"
190             Strikeout="False" />
191         <PreText>Pre Text </PreText>
192         <PostText></PostText>
193         <Start>1</Start>
194         <Current>1</Current>
195         <Increment>1</Increment>
196         <FormatWidth>3</FormatWidth>
197         <UseLeadingZeros>True</UseLeadingZeros>
198     </CounterObject>
199     <Bounds X="336" Y="2589" Width="2160" Height="330" />
200 </ObjectInfo>
201 <ObjectInfo>
202     <ImageObject>
203         <Name>Graphic</Name>
204         <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
205         <BackColor Alpha="0" Red="255" Green="255" Blue="255" />
206         <LinkedObjectName></LinkedObjectName>
207         <Rotation>Rotation0</Rotation>
208         <IsMirrored>False</IsMirrored>
209         <IsVariable>False</IsVariable>
210         <Image>iVBORw0KGgoAAAANSUHEUgAAAYgAAAF2CAYAAAB02w9PAAACXBIWXMAAA7DAAAOWwHHb6hkAA
507         B/w9ijrFQSeOvwgAAABJRUS5ErkJggg==</Image>
508         <ScaleMode>Uniform</ScaleMode>
509         <BorderWidth>0</BorderWidth>
510         <BorderColor Alpha="255" Red="0" Green="0" Blue="0" />
511         <HorizontalAlignment>Center</HorizontalAlignment>
512         <VerticalAlignment>Center</VerticalAlignment>
513     </ImageObject>
514     <Bounds X="4860" Y="852.900024414063" Width="691.203186035156" Height="615" />
515 </ObjectInfo>
516 <ObjectInfo>
517     <ImageObject>
518         <Name>Graphic-Clone</Name>
519         <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
520         <BackColor Alpha="0" Red="255" Green="255" Blue="255" />
521         <LinkedObjectName>Graphic</LinkedObjectName>
522         <Rotation>Rotation0</Rotation>
523         <IsMirrored>False</IsMirrored>
524         <IsVariable>False</IsVariable>
525         <ImageLocation>/>
526         <ScaleMode>Uniform</ScaleMode>
527         <BorderWidth>0</BorderWidth>
528         <BorderColor Alpha="255" Red="0" Green="0" Blue="0" />
529         <HorizontalAlignment>Center</HorizontalAlignment>
530         <VerticalAlignment>Center</VerticalAlignment>
531     </ImageObject>
532     <Bounds X="5091.28344726562" Y="1602.90002441406" Width="582.716552734375"
533         Height="390" />
534 </ObjectInfo>
535 <ObjectInfo>
536     <ImageObject>
537         <Name>GoogleLogo</Name>
538         <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
539         <BackColor Alpha="0" Red="255" Green="255" Blue="255" />
540         <LinkedObjectName></LinkedObjectName>
541         <Rotation>Rotation0</Rotation>
542         <IsMirrored>False</IsMirrored>
543         <IsVariable>False</IsVariable>
544         <ImageLocation>http://www.google.com/intl/en_ALL/images/logo.gif</ImageLocation>
545         <ScaleMode>Uniform</ScaleMode>
546         <BorderWidth>0</BorderWidth>
547         <BorderColor Alpha="255" Red="0" Green="0" Blue="0" />
548         <HorizontalAlignment>Center</HorizontalAlignment>
549         <VerticalAlignment>Center</VerticalAlignment>
550     </ImageObject>
551     <Bounds X="3465" Y="2292.90002441406" Width="1905.34887695313" Height="375" />
552 </ObjectInfo>
553 </DieCutLabel>
```

Note: lines ##211-506 contain image data and were deleted because the real image content is irrelevant to our discussion.

Common Properties

Name

```
011         <Name>BarcodeText</Name>
```

Name is one of the most important properties. It serves as a unique identifier for an object. Usually it is used to refer to the object from code that uses the DYMO Label SDK. There are no restrictions how to name the object. The name can contain any Unicode character and the name length has no limit. Still, it is a good practice to only use alpha-numeric characters and keep the name length short. It is not required to assign a name to the object – if the object is not going to be referenced it is perfectly OK to have empty name. It is also OK (but not very useful) to have two or more objects with the same name. The DYMO Label Runtime will use the first object found with a specified name. There is no guarantee which object with the same name will be used. Names are case sensitive, so "Name", "NAME", and "name" are treated as different names.

LinkedObjectName

```
128     <BarcodeObject>
129         <Name>Barcode</Name>
132         <LinkedObjectName>BarcodeText</LinkedObjectName>
```

LinkedObjectName property defines a link where you can content from a different object as content for the current object. For example, look at line #124. It specifies that the text for the barcode object named "Barcode" should be taken from an object named "BarcodeText". In the DYMO Label application it is only possible to link a barcode object to a text object. But in code it is possible to link any objects by specifying **LinkedObjectName** property directly in the label file.

```
517     <ImageObject>
518         <Name>Graphic-Clone</Name>
521         <LinkedObjectName>Graphic</LinkedObjectName>
```

Line #408 directs the Runtime to set image data for the graphic object named "Graphic-Clone" from the graphic object named "Graphic". As a result the label file

Line #432 directs the Runtime to get image data for the graphic object named "Graphic-Clone" from the graphic object named "Graphic". As a result the label file contains only one copy of the image data: that significantly decreases its size.

Text Object

The **Text** object displays a block of text.

StyledText

The **StyledText** property specifies the object's text and text style(s). the following attributes are available on a per character basis:


- font name
- font size
- font style: bold, italic, underline, strikeouts
- color (character foreground color)

```
066         <StyledText>
067             <Element>
068                 <String>DYMO
069             </String>
070             <Attributes>
071                 <Font Family="Arial" Size="12" Bold="True" Italic="False"
072                     Underline="False" Strikeout="False" />
073                 <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
074             </Attributes>
075             </Element>
076             <Element>
077                 <String>828 SAN PABLO AVE
078             </String>
079             <Attributes>
080                 <Font Family="Arial" Size="12" Bold="False" Italic="True"
081                     Underline="False" Strikeout="False" />
082                 <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
083             </Attributes>
084             </Element>
085             <Element>
086                 <String>ALBANY CA 94706-1567</String>
087             <Attributes>
088                 <Font Family="Arial" Size="12" Bold="False" Italic="False"
089                     Underline="True" Strikeout="False" />
090                 <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
091             </Attributes>
092             </Element>
093         </StyledText>
```

The example above specifies that the text contains three lines, with each line formatted differently. The **Element** tag specifies a range of characters with the same formatting. The **String** tag specifies text/characters, while the **Attributes** tag specifies text formatting attributes.

Adding Line Breaks

To include a new line separator just put a new line/carriage return symbol(s) into the **String** tag. The text specified by above **StyledText** will be displayed like this:

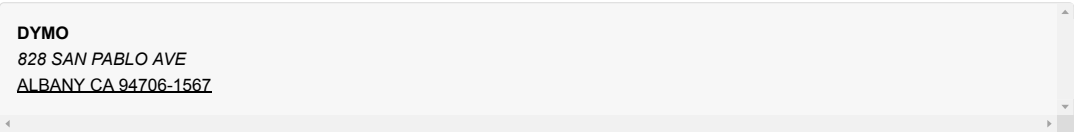

UseFullFontHeight

```
021         <UseFullFontHeight>False</UseFullFontHeight>
```

The **UseFullFontHeight** property can be used to increase font size to the maximum possible size when shrink-to-fit or auto-fit are applied to the object. When **UseFullFontHeight** is True (the default) the line height is calculated based on the font metrics. So, the height is the same regardless of the text content. When **UseFullFontHeight** is False the line height is calculated based on the height of each character's "black box" (an area where glyph outline is drawn). Because usually a character's "black box" height is smaller than its font height a bigger font size can be used to draw text. This property might be useful in scenarios where printable area is limited but you want to make the text as large as possible, e.g. for tape labels. For example, below is the same label with only **UseFullFontHeight** property changed.



Address Object

The **Address** object is similar to the Text object. It is used to display address information. If the address is a valid US address then the Address object can also display and Intelligent Mail barcode.

Barcode Object

The **Barcode** object is used to display barcodes on the label.

Image Object

The **Image** object is used to display bitmap images on the label.

Image

The **Image** property specifies image data. Image data is encoded using base64 encoding and the image data itself is in PNG format.

ImageLocation

```
544         <ImageLocation>http://www.google.com/intl/en_ALL/images/logo.gif</ImageLocation>
```

The **ImageLocation** property is another way to specify image data. In this case image data is not stored inside the label but is loaded on demand from the specified

URI. The URI can be a path to a local file, e.g. "C:\Users\UserName\Documents\MyImage.png" or "http://", "https://" or "file://" URLs. The URI can point not only to PNG files but to any image file type supported by the DYMO Label Software (BMP, JPG, GIF, TIF, PNG). **ImageLocation** can be used in scenario when there is a set of label files that should share same image, e.g. a company logo.

Note: the specified URI will be accessed on demand, basically when a label is being printed or previewed. If the URI specifies a remote resource there can be a delay or even an exception if the URI is inaccessible.

Date and Time Object

The **Date and Time** object is a special kind of the Text object designed to display current date and/or time.

Counter Object

The **Counter** object is a special kind of the Text object designed to print auto-incremented numbers. Every time the label is printed the **Current** property of the **Counter** object is updated based on the **Increment** property. So, the next time the label is printed the new updated value for the **Counter** will be used.

Note: To preserve the value **Current** property between an application runs (so, the next time application runs the Counter continues from its last value), the label should be saved when the application exits. To avoid unnecessary label modifications we do not recommend to use **Counter** objects in SDK applications. Use Text object instead and format its text according to the application's logic. The "current" counter value can be fetched for example from a database or from a web-server in a way the application fully controls and understands.

Shape Object

The **Shape** object displays simple geometric figures like rectangles and ellipses as well as vertical and horizontal lines.

Circular Text Object

The **Circular Text** object display text on a curve. Usually it is used on CD/DVD labels.

Posted by dymodev at 00:58

Tagged with: file, label, xml

Mar 23 2010

Understanding Label File Formats in DYMO Label v.8 – Overview

SDK Samples 37 Responses »

DYMO Label Software v.8 has a lot of compelling features from a developer's point of view. One important change is the new label file format.

In most cases knowing the file format is not necessary because DYMO Label Software (DLS) can be used to design a label visually. However, there are advanced scenarios where knowing the file format can benefit applications that use the DYMO Label SDK. Some of these advanced scenarios are:

- Using features not available through the DYMO Label Software UI
- Using features not available through the DYMO Label SDK
- Generating label files on the fly
- Creating label files for custom labels

In a series of blog posts we will describe the internals of label file format.

In DYMO Label v.8 we made several improvements to make using label files easier:

- The label file format is cross-platform; both Windows and Mac versions of DYMO Label Software use the same file format and shared the same built-in layouts. Because file format is the same it is easier to create applications target different platform, e.g. web-based applications.
- The label file format is XML-based. So the content of a label can be examined by just looking at the label's XML or by using any XML tool. Also, this allows using any XML API to manipulate label content directly in case the corresponding functionality is unavailable in the DYMO Label SDK or direct manipulation is more convenient in this particular case.
- The label file format is the same for die-cut labels such as Address or Shipping and for tape/continuous labels such as 12-mm or 19-mm tapes. Strictly speaking the format is not the same but both formats shared some common parts, so it is still easier to use.

So, let look at a sample label that in DYMO Label Software looks like



```
01 xml version="1.0" encoding="utf-8"?>
02 <DieCutLabel Version="8.0" Units="twips">
03   <PaperOrientation>Landscape</PaperOrientation>
04   <Id>Address</Id>
05   <PaperName>30252 Address</PaperName>
06   <DrawCommands>
07     <RoundRectangle X="0" Y="0" Width="1581" Height="5040" Rx="270" Ry="270" />
08   </DrawCommands>
09   <ObjectInfo>
10     <TextObject>
11       <Name>Text</Name>
12       <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
13       <BackColor Alpha="0" Red="255" Green="255" Blue="255" />
14       <LinkedObjectName></LinkedObjectName>
15       <Rotation>Rotation0</Rotation>
16       <IsMirrored>False</IsMirrored>
17       <IsVariable>True</IsVariable>
18       <HorizontalAlignment>Center</HorizontalAlignment>
19       <VerticalAlignment>Middle</VerticalAlignment>
20       <TextFitMode>ShrinkToFit</TextFitMode>
21       <UseFullFontHeight>True</UseFullFontHeight>
```

```
22      <Verticalized>False</Verticalized>
23      <StyledText>
24        <Element>
25          <String>Click here to enter text</String>
26          <Attributes>
27            <Font Family="Arial" Size="20" Bold="False" Italic="False" Underline="False" Strikeout="False" />
28            <ForeColor Alpha="255" Red="0" Green="0" Blue="0" />
29          </Attributes>
30        </Element>
31      </StyledText>
32    </TextObject>
33    <Bounds X="331" Y="150" Width="4560" Height="1343" />
34  </ObjectInfo>
35 </DieCutLabel>
```

```
02 <DieCutLabel Version="8.0" Units="twips">
```

Line #2 specifies label type as well as version and measurement units. The label type is **DieCutLabel**, one of two label types currently supported by DYMO Label. **DieCutLabel** as well as other label type **ContinuousLabel** will be described with details in a separate blog post. **Version**="8.0" specifies file format version. This version is independent from the version of DYMO Label Software. Currently the only valid version for label file is "8.0" for all versions of DYMO Label Software v.8 up to the latest version, 8.2.1.913. **Units**="twips" specifies measurement units used in the file for values like object position or border width. The only supported units for now are "twips" where 1 'twip' is 1/1440 of inch. Other units might be added in future version of DYMO Label. "Twips" are used basically because of "historical" reasons; previous versions of DYMO Label Software used this unit.

```
03    <PaperOrientation>Landscape</PaperOrientation>
05    <PaperName>30252 Address</PaperName>
```

Lines #3, #5 specify paper to use to print the label. In this case it is "30352 Address" paper in Landscape orientation. Paper name should be a paper defined by printer driver.

```
04    <Id>Address</Id>
```

Line #4 specifies a label ID – a unique identifier for a label type. Basically this ID is used by DYMO Label Software to lookup additional business-related information about the label like available packaging, buy links, etc. It is OK to have ID to be set to empty string if the label is not going to be used from DYMO Label Software.

```
06    <DrawCommands>
07      <RoundRectangle X="0" Y="0" Width="1581" Height="5040" Rx="270" Ry="270" />
08    </DrawCommands>
```

Lines ##6-8 specify commands used to draw label's shape, in this case a rounded rectangle. Again, if a label is created on the fly and intended to be printed only, the commands can be omitted.

Lines ## 9-34 specify position and properties for the only text object on the label. More information about objects will be provided in following posts.

The complete xml schema for the label file format is available on <http://www.labelwriter.com/software/dls/sdk/LabelFile.xsd>

Posted by dymodev at 18:33

Tagged with: file, label, xml