Apixaban PBPK/PD model: fit PK

1 Methods: Apixaban PBPK/PD model: fit PK

1.1 Parameters and data

14 parameters were optimized: tissue distribution api (`ftissue_api`), tissue/unbound plasma partition coefficient (Kp,u) api (`Kp_api`), rate of the CYP3A4 metabolism of apixaban (`LI__API2M_k`), renal clearance of unbound apixaban relative to the GFR (`KI__APIEX_f`), intestinal secretion clearance of unbound apixaban (`GU__APISEC_k`), rate of apixaban absorption (`GU__APIABS_k`), rate of the small intestinal transit (`GU__SITRANS_k`), Ka_dis [1/hr] dissolution apixaban in tablet (`GU__Ka_dis_api`), Ka_sol [1/hr] transport apixaban in solution (`GU__Ka_sol_api`), undissolved dose of half-maximal dissolution [mg] (`GU__PODOSE_50`), renal clearance of M1 relative to the GFR (`KI__M1EX_f`), renal clearance of M7 relative to the GFR (`KI__M7EX_f`), rate of the biliary excretion of the apixaban metabolites (`LI__MXEXBI_k`) and rate of the sulfation M2 -> M1 (`LI__M22M1_k`).

A fit mapping is a curve of a study, the data and the observable of the model it is compared with. The fit has 95 fit mappings of training data with 930 data points, whose residuals enter the objective; and 74 fit mappings of validation data with 868 data points, which were simulated and evaluated with the fitted parameters but not fitted. The fit was set up and run with sbmlsim [1].

1.2 Objective function

The parameters were estimated by minimizing the objective function

$$F(\vec{p}) = \frac{1}{2} \sum_k \sum_i \rho\left(w_{i,k} r_{i,k}(\vec{p})^2\right) \tag{1}$$

where k runs over the fit mappings of the training data and i over their data points, $r_{i,k}$ is the residual, $w_{i,k} = w_k w^p_{i,k}$ the weight of the data point and ρ the loss function, applied to the squared weighted residual $z = w_{i,k} r^2_{i,k}$. The loss function is linear, $\rho(z) = z$, i.e. a standard least squares problem.

The residuals are normalized by the mean $\overline{y}_k$ of the data of their curve, which makes curves of different quantities and magnitudes comparable:

$$r_{i,k} = \frac{y_{i,k} - f_{k(x_{i,k},\vec{p})}}{\overline{y}_k} \tag{2}$$

The weight of curve k is $w_k = \frac{n_k}{N_k}$, the weight n_k of its fit mapping (the weight its fit mapping collection assigns, 1 by default, or, for a collection which uses the weights of its mappings, the weight of the mapping, by default the number of subjects of its data) divided by the number N_k of its data points.

A data point is weighted with the inverse of its coefficient of variation, $w^p_{i,k} = |y_{i,k} \frac{|}{\sigma_{i,k}}$, with $\sigma_{i,k}$ the standard deviation of the data point, or its standard error for data without a standard deviation. An error of zero is missing, a missing error of a curve with errors is replaced by the largest error of the curve, and the data points of a curve without errors have the weight $w^p_{i,k} = 2$, the weight of a coefficient of variation of 0.5.

1.3 Optimization

The optimizer searched the parameters in log10 space within their bounds; bounds, values and intervals are given in the units of the fit parameters, the units of the table of the parameters.

The objective was minimized in 3 runs with differential evolution [2] of SciPy [3] within the bounds of the parameters, with the strategy `best1bin`, a population of 15 times the number of parameters, at most 1000 generations, the relative tolerance 0.01 of convergence, the recombination constant 0.7 and a mutation dithered between 0.5 and 1. The initial population of a run was drawn by latin hypercube sampling [4], with a seed of every run derived from the seed 1234 of the fit. The best member of the final population was polished with the L-BFGS-B method of SciPy.

The convergence of the runs was assessed from the traces of their cost and the waterfall plot of their final costs, and the parameter set with the lowest cost was used.

The models were simulated with libRoadRunner [5] and its integrator CVODE [6] with the relative tolerance 10^{-6} and the absolute tolerances 10^{-12} of an amount, 10^{-12} of a concentration and 10^{-6} of the other states, which for a species in a concentration is multiplied by the initial volume of its compartment. It ran with the variable step size of libRoadRunner, i.e. with an output at every step of the integrator. A data point at the time of a change after the start

of a simulation, e.g. a dose or the reset of a collection, was compared with the state before the change, except the first data point of a curve with data at later times, which starts a collection and was compared with the state after the change.

1.4 Goodness of fit

The goodness of fit is given per kind of data (training data and validation data) by metrics over its n data points with the residuals $e_i = y_i - f\left(x_i, \hat{\vec{p}}\right)$ at the fitted parameters $\hat{\vec{p}}$, the mean squared error, its root and the root mean squared error normalized by the mean $\overline{y}_{k(i)}$ of the data of the curve of a point:

$$\mathrm{MSE} = \frac{1}{n}\sum_{i=1}^{n} e_i^2, \quad \mathrm{RMSE} = \sqrt{\mathrm{MSE}}, \quad \mathrm{NRMSE} = \sqrt{\frac{1}{n}\sum_{i=1}^{n}\left(\frac{e_i}{\overline{y}_{k(i)}}\right)^2} \tag{3}$$

The root mean square of the residuals of the objective, i.e. what the fit minimizes, and the coefficient of determination:

$$\mathrm{RMSE}_w = \sqrt{\frac{1}{n}\sum_{i=1}^{n}\rho(w_i r_i^2)}, \quad R^2 = 1 - \frac{\sum_i e_i^2}{\sum_i \left(y_i - \overline{y}\right)^2} \tag{4}$$

The predictions of a non-linear model are no linear regression of the data, so R^2 can be negative: the prediction is worse than the mean of the data. The information criteria of Akaike [7] and Schwarz [8] with the number n_p of fitted parameters are those of a least squares fit with normally distributed residuals, up to an additive constant, so only differences between models fitted to the same data are meaningful:

$$\mathrm{AIC} = n\ln(\mathrm{MSE}) + 2n_p, \quad \mathrm{BIC} = n\ln(\mathrm{MSE}) + n_p\ln(n) \tag{5}$$

The percentage of the data points whose prediction $f_i = f\left(x_i, \hat{\vec{p}}\right)$ lies within twofold of the data is taken over the n_+ data points with positive data $y_i > 0$ and a positive prediction $f_i > 0$; the others have no ratio and are not counted, and a kind of data without such a point has no percentage:

$$P_2 = \frac{100}{n_+}\left|\left\{i : \frac{1}{2} \le \frac{f_i}{y_i} \le 2\right\}\right| \tag{6}$$

The goodness of fit plot shows the predictions against the data on logarithmic axes, with the lines of twofold $f = 2y$ and $f = \frac{y}{2}$. The Bland-Altman plot [9] shows the ratio of prediction and data as $d_i = \log_{10}\left(\frac{f_i}{y_i}\right)$ against the geometric mean $\sqrt{f_i y_i}$ for the data points with positive values, with the bias $\overline{d}$ and the limits of agreement $\overline{d} \pm 1.96 s_d$, with the sample standard deviation s_d of d_i, of the training data; they are read as the fold factors $10^{\overline{d}}$ and $10^{\overline{d} \pm 1.96 s_d}$.

1.5 Identifiability

The identifiability of the parameters was analysed with the profile likelihood [10], [11]. The profile of a parameter is the lowest objective with the parameter fixed:

$$\mathrm{PL}(p_j) = \min_{p_{l \ne j}} F(\vec{p}) \tag{7}$$

At every point of a scan the other parameters were re-optimized from the previous point with the least squares optimizer of SciPy with the relative step 0.05. A scan ran from the optimum in both directions in the space of the optimizer, with steps in decades of the parameter, starting at 0.1. A step which raised the objective by more than 0.2 of the distance between the objective at the optimum and the threshold was reduced by the factor 2 and repeated, down to 0.01, and the step after one which raised it by less than that divided by the factor was enlarged by the factor, up to 1. A scan stopped at the threshold, at the bound of the parameter, at a point which failed or after 50 points.

The confidence intervals are the values at which the profile crosses the threshold of the likelihood ratio test

$$F_{\mathrm{thr}} = F_{\mathrm{min}} + \chi^2_\alpha \frac{\mathrm{df}}{2} \tag{8}$$

with F_{min} the lowest objective of the fit and of all profiles and $\chi^2_\alpha(\mathrm{df})$ the quantile of the χ^2 distribution at the confidence level $\alpha = 0.95$ with df = 1 degrees of freedom, i.e. 1.92 above the lowest objective. The threshold has this confidence level if F is the negative log-likelihood of the data up to a constant, i.e. if the weighted residuals are independent and normally distributed with unit variance; otherwise the level is approximate. A crossing is interpolated between two points of the profile, on the logarithm of a parameter on a logarithmic scale. A parameter is

identifiable if its profile reaches the threshold within the scan on both sides of the optimum, i.e. its confidence interval is finite; practically non-identifiable towards the lower bound if its profile reaches the threshold above the optimum but not below it within the scan, which ends at the lower bound or after 50 points; practically non-identifiable towards the upper bound if its profile reaches the threshold below the optimum but not above it within the scan, which ends at the upper bound or after 50 points; practically non-identifiable if its profile reaches the threshold on neither side within the scans, which end at the bounds or after 50 points, and is not flat; and structurally non-identifiable if its profile is flat on both sides. A side of a profile is flat if it rises by less than 0.05 of the distance between the lowest objective and the threshold, and a profile with a point which failed or did not converge is not classified. The profile likelihood is preferred over the intervals of the Fisher information, its intervals are invariant under a transformation of the parameters and can be asymmetric [12].

The Fisher information is the local alternative to the profiles: it is the Gauss-Newton approximation of the curvature of the objective at the optimum, from the Jacobian J of the weighted residuals of the training data with respect to the parameters $\vec{p}$ in the space of the optimizer, computed by central finite differences with the step $h_j = \varepsilon \max\left(|p_j|, 1\right),\ \varepsilon = 10^{-6}$ of the parameter p_j:

$$I = J^{\top} J, \quad \mathrm{cov} = \sigma^2 I^{-1}, \quad \sigma^2 = \frac{2F}{n - n_p} \tag{9}$$

with the number n of data points of the training data and the number n_p of parameters. The information has rank 14 of 14, the number of its eigenvalues above 10^{-8} of the largest one, and the condition number 1660; the covariance of an information of a lower rank is computed with the pseudo-inverse. The Wald intervals are $\hat{p}_j \pm t_{\frac{1+\alpha}{2}, n-n_p} \mathrm{SE}_j$ with the standard errors $\mathrm{SE}_j = \sqrt{\mathrm{cov}_{jj}}$ at the confidence level $\alpha = 0.95$, transformed back into the units of the fit parameters.

1.6 Provenance

The fit PK_20261017_103232__85dfa was run on 2026-10-17 08:32:37 UTC with sbmlsim 0.10.0 [1], libRoadRunner 2.10.0 [5], SciPy 1.18.1 [3], NumPy 2.5.3 [13] and Python 3.14.4 (seed 1234). The models and data were those of commit `62f53da3ca7dc6c45fe2e74e456ec4d8879f17b7` of `/home/mkoenig/git/pkdb_models-apixaban` their SHA-256 checksums are listed in Table 1.

Table 1: SHA-256 checksums of the models and data of the fit PK_20261017_103232__85dfa, their first 12 characters; the full checksums are in the provenance of the result (optimization_result.json).

File	SHA-256
pkdb_models/models/apixaban/data/apixaban/Abdollahizad2025/.Abdollahizad2025_Fig3.tsv	4f8b0c560d99...
pkdb_models/models/apixaban/data/apixaban/Abdollahizad2025/.Abdollahizad2025_Tab2.tsv	3296aefcfacc...
pkdb_models/models/apixaban/data/apixaban/Abdollahizad2025/.Abdollahizad2025_TabGroups.tsv	2adc0b970228...
pkdb_models/models/apixaban/data/apixaban/Abdollahizad2025/.Abdollahizad2025_TabInterventions.tsv	e8295972879d...
pkdb_models/models/apixaban/data/apixaban/Bashir2018/.Bashir2018_Fig2.tsv	03aa55d24e79...
pkdb_models/models/apixaban/data/apixaban/Bashir2018/.Bashir2018_Fig3.tsv	ee0a7c3d9bfc...
pkdb_models/models/apixaban/data/apixaban/Bashir2018/.Bashir2018_Tab2.tsv	806709231e1d...
pkdb_models/models/apixaban/data/apixaban/Bashir2018/.Bashir2018_TabGroups.tsv	6cf30c51fc4d...
pkdb_models/models/apixaban/data/apixaban/Bashir2018/.Bashir2018_TabInterventions.tsv	816839b09543...
pkdb_models/models/apixaban/data/apixaban/Chang2016/.Chang2016_Fig1.tsv	0352871b6389...
pkdb_models/models/apixaban/data/apixaban/Chang2016/.Chang2016_Fig2.tsv	95769ec8e9e4...
pkdb_models/models/apixaban/data/apixaban/Chang2016/.Chang2016_Fig4.tsv	7188f9aa9962...
pkdb_models/models/apixaban/data/apixaban/Chang2016/.Chang2016_Tab2.tsv	7d2904171bbd...
pkdb_models/models/apixaban/data/apixaban/Chang2016/.Chang2016_Tab3.tsv	1ce97be98f40...
pkdb_models/models/apixaban/data/apixaban/Chang2016/.Chang2016_TabGroups.tsv	35e0804978f4...

File	SHA-256
pkdb_models/models/apixaban/data/apixaban/Chang2016/.Chang2016_TabInterventions.tsv	92c03c1da742...
pkdb_models/models/apixaban/data/apixaban/Cui2013/.Cui2013_Fig1.tsv	ae428ee0b8dc...
pkdb_models/models/apixaban/data/apixaban/Cui2013/.Cui2013_Fig2.tsv	991d0c11d541...
pkdb_models/models/apixaban/data/apixaban/Cui2013/.Cui2013_Fig3.tsv	1e0a1160077a...
pkdb_models/models/apixaban/data/apixaban/Cui2013/.Cui2013_Fig3Mean.tsv	284937115771...
pkdb_models/models/apixaban/data/apixaban/Cui2013/.Cui2013_Tab2.tsv	1a4340c4faf2...
pkdb_models/models/apixaban/data/apixaban/Cui2013/.Cui2013_TabGroups.tsv	5ba28aa95849...
pkdb_models/models/apixaban/data/apixaban/Cui2013/.Cui2013_TabInterventions.tsv	550a701ae711...
pkdb_models/models/apixaban/data/apixaban/Frost2013/.Frost2013_Fig1A.tsv	14396488c630...
pkdb_models/models/apixaban/data/apixaban/Frost2013/.Frost2013_Fig1B.tsv	e1c8e80175fc...
pkdb_models/models/apixaban/data/apixaban/Frost2013/.Frost2013_Fig2.tsv	a92c07efa774...
pkdb_models/models/apixaban/data/apixaban/Frost2013/.Frost2013_Fig3.tsv	1b9f280f2157...
pkdb_models/models/apixaban/data/apixaban/Frost2013/.Frost2013_Fig4.tsv	3d8b3088614c...
pkdb_models/models/apixaban/data/apixaban/Frost2013/.Frost2013_Tab2A.tsv	69a33c16824d...
pkdb_models/models/apixaban/data/apixaban/Frost2013/.Frost2013_Tab3.tsv	7d9f3d72fb18...
pkdb_models/models/apixaban/data/apixaban/Frost2013/.Frost2013_TabGroups.tsv	de46a2bbded1...
pkdb_models/models/apixaban/data/apixaban/Frost2013/.Frost2013_TabInterventions.tsv	a7ca3f9c29a3...
pkdb_models/models/apixaban/data/apixaban/Frost2013a/.Frost2013a_Fig1.tsv	45300b59db96...
pkdb_models/models/apixaban/data/apixaban/Frost2013a/.Frost2013a_Fig2.tsv	37058be255a6...
pkdb_models/models/apixaban/data/apixaban/Frost2013a/.Frost2013a_Fig3.tsv	a8ec84ba843e...
pkdb_models/models/apixaban/data/apixaban/Frost2013a/.Frost2013a_Fig4.tsv	cc7b961d10ea...
pkdb_models/models/apixaban/data/apixaban/Frost2013a/.Frost2013a_Fig4Mean.tsv	68da206e82ec...
pkdb_models/models/apixaban/data/apixaban/Frost2013a/.Frost2013a_Tab2.tsv	42848c3579c0...
pkdb_models/models/apixaban/data/apixaban/Frost2013a/.Frost2013a_Tab3.tsv	c2b804a15f64...
pkdb_models/models/apixaban/data/apixaban/Frost2013a/.Frost2013a_TabGroups.tsv	28d08ad03eeb...
pkdb_models/models/apixaban/data/apixaban/Frost2013a/.Frost2013a_TabIndividuals.tsv	a22b7cc6a7ba...
pkdb_models/models/apixaban/data/apixaban/Frost2013a/.Frost2013a_TabInterventions.tsv	c20d88907547...
pkdb_models/models/apixaban/data/apixaban/Frost2014/.Frost2014_Fig2.tsv	f1f322c6e751...
pkdb_models/models/apixaban/data/apixaban/Frost2014/.Frost2014_Fig3.tsv	9b209d1c9c15...
pkdb_models/models/apixaban/data/apixaban/Frost2014/.Frost2014_Fig4.tsv	de5f58673bdc...
pkdb_models/models/apixaban/data/apixaban/Frost2014/.Frost2014_Fig4Mean.tsv	20c5a8eeb2f7...
pkdb_models/models/apixaban/data/apixaban/Frost2014/.Frost2014_Tab2.tsv	3d95991a76f4...
pkdb_models/models/apixaban/data/apixaban/Frost2014/.Frost2014_Tab3.tsv	dc6374a9c6a9...
pkdb_models/models/apixaban/data/apixaban/Frost2014/.Frost2014_TabGroups.tsv	dfaab6207c67...
pkdb_models/models/apixaban/data/apixaban/Frost2014/.Frost2014_TabIndividuals.tsv	6cef70f6b764...
pkdb_models/models/apixaban/data/apixaban/Frost2014/.Frost2014_TabInterventions.tsv	5f030dcf7a00...
pkdb_models/models/apixaban/data/apixaban/Frost2014a/.Frost2014a_Fig2.tsv	d007c2d2a9ea...
pkdb_models/models/apixaban/data/apixaban/Frost2014a/.Frost2014a_Fig3.tsv	728fa3625e23...
pkdb_models/models/apixaban/data/apixaban/Frost2014a/.Frost2014a_Tab2.tsv	cfa73a448725...
pkdb_models/models/apixaban/data/apixaban/Frost2014a/.Frost2014a_Tab3.tsv	5f773246ae84...

File	SHA-256
pkdb_models/models/apixaban/data/apixaban/Frost2014a/.Frost2014a_TabGroups.tsv	4d48c9165d66...
pkdb_models/models/apixaban/data/apixaban/Frost2014a/.Frost2014a_TabIndividuals.tsv	8a1016944af5...
pkdb_models/models/apixaban/data/apixaban/Frost2014a/.Frost2014a_TabInterventions.tsv	f791c17c0566...
pkdb_models/models/apixaban/data/apixaban/Frost2015/.Frost2015_Fig1.tsv	cd779ba2d42a...
pkdb_models/models/apixaban/data/apixaban/Frost2015/.Frost2015_Fig2.tsv	c193ff1a1d83...
pkdb_models/models/apixaban/data/apixaban/Frost2015/.Frost2015_Fig3.tsv	afa67d771ca8...
pkdb_models/models/apixaban/data/apixaban/Frost2015/.Frost2015_Fig4.tsv	feefb9854483...
pkdb_models/models/apixaban/data/apixaban/Frost2015/.Frost2015_Tab2.tsv	bd8904f488ac...
pkdb_models/models/apixaban/data/apixaban/Frost2015/.Frost2015_Tab3.tsv	9d0ef2abab9c...
pkdb_models/models/apixaban/data/apixaban/Frost2015/.Frost2015_TabGroups.tsv	fcb2fce177cb...
pkdb_models/models/apixaban/data/apixaban/Frost2015/.Frost2015_TabInterventions.tsv	9d7e7cfb9f9f...
pkdb_models/models/apixaban/data/apixaban/Frost2015a/.Frost2015a_Fig2.tsv	9d9125c9b212...
pkdb_models/models/apixaban/data/apixaban/Frost2015a/.Frost2015a_Tab2.tsv	a70e8f880269...
pkdb_models/models/apixaban/data/apixaban/Frost2015a/.Frost2015a_TabGroups.tsv	0c2b5940ff29...
pkdb_models/models/apixaban/data/apixaban/Frost2015a/.Frost2015a_TabInterventions.tsv	d2921d0fcfa6...
pkdb_models/models/apixaban/data/apixaban/Frost2015b/.Frost2015b_Fig3.tsv	f0c4d606ddc4...
pkdb_models/models/apixaban/data/apixaban/Frost2015b/.Frost2015b_Tab3.tsv	6f88f2e70473...
pkdb_models/models/apixaban/data/apixaban/Frost2015b/.Frost2015b_TabGroups.tsv	3491fb314ddf...
pkdb_models/models/apixaban/data/apixaban/Frost2015b/.Frost2015b_TabInterventions.tsv	a3f829a43905...
pkdb_models/models/apixaban/data/apixaban/Frost2017/.Frost2017_Fig2.tsv	ae1ed64e88b6...
pkdb_models/models/apixaban/data/apixaban/Frost2017/.Frost2017_Fig3.tsv	bf279c8ed202...
pkdb_models/models/apixaban/data/apixaban/Frost2017/.Frost2017_Tab2.tsv	bef5ee0e1bdd...
pkdb_models/models/apixaban/data/apixaban/Frost2017/.Frost2017_Tab3.tsv	584dc9370534...
pkdb_models/models/apixaban/data/apixaban/Frost2017/.Frost2017_TabGroups.tsv	08120bfa343b...
pkdb_models/models/apixaban/data/apixaban/Frost2017/.Frost2017_TabInterventions.tsv	1df46be8ead9...
pkdb_models/models/apixaban/data/apixaban/Frost2018/.Frost2018_Fig1.tsv	9e17aeebac0b...
pkdb_models/models/apixaban/data/apixaban/Frost2018/.Frost2018_Fig2.tsv	dc44d168e9c3...
pkdb_models/models/apixaban/data/apixaban/Frost2018/.Frost2018_Fig3.tsv	e243b90e21cf...
pkdb_models/models/apixaban/data/apixaban/Frost2018/.Frost2018_Tab2.tsv	dd5503b475ab...
pkdb_models/models/apixaban/data/apixaban/Frost2018/.Frost2018_TabGroups.tsv	10110a2b6f20...
pkdb_models/models/apixaban/data/apixaban/Frost2018/.Frost2018_TabIndividuals.tsv	37356fdc1501...
pkdb_models/models/apixaban/data/apixaban/Frost2018/.Frost2018_TabInterventions.tsv	9783e1916026...
pkdb_models/models/apixaban/data/apixaban/Frost2021/.Frost2021_Fig1.tsv	558a828f7fcd...
pkdb_models/models/apixaban/data/apixaban/Frost2021/.Frost2021_Fig1_2Mean.tsv	d0b0a9c05106...
pkdb_models/models/apixaban/data/apixaban/Frost2021/.Frost2021_Fig2.tsv	e9563702e95a...
pkdb_models/models/apixaban/data/apixaban/Frost2021/.Frost2021_Fig3.tsv	c5b4748051f9...
pkdb_models/models/apixaban/data/apixaban/Frost2021/.Frost2021_Fig3Mean.tsv	954524b8af58...
pkdb_models/models/apixaban/data/apixaban/Frost2021/.Frost2021_Tab2.tsv	78dfa962cef1...

File	SHA-256
pkdb_models/models/apixaban/data/apixaban/Frost2021/.Frost2021_TabGroups.tsv	d708c674a4af...
pkdb_models/models/apixaban/data/apixaban/Frost2021/.Frost2021_TabInterventions.tsv	24db386dc770...
pkdb_models/models/apixaban/data/apixaban/Frost2021a/.Frost2021a_Fig1.tsv	724f468d857c...
pkdb_models/models/apixaban/data/apixaban/Frost2021a/.Frost2021a_Fig2a.tsv	d9a0f8409622...
pkdb_models/models/apixaban/data/apixaban/Frost2021a/.Frost2021a_Fig2b.tsv	a96e7b0ee29d...
pkdb_models/models/apixaban/data/apixaban/Frost2021a/.Frost2021a_Fig3.tsv	cb0b5a0757b4...
pkdb_models/models/apixaban/data/apixaban/Frost2021a/.Frost2021a_Tab2.tsv	a9aa0b48c37d...
pkdb_models/models/apixaban/data/apixaban/Frost2021a/.Frost2021a_TabGroups.tsv	0eabc1deea0f...
pkdb_models/models/apixaban/data/apixaban/Frost2021a/.Frost2021a_TabInterventions.tsv	f2d6b1da0f39...
pkdb_models/models/apixaban/data/apixaban/Garonzik2019/.Garonzik2019_Fig2.tsv	fff7ed68e308...
pkdb_models/models/apixaban/data/apixaban/Garonzik2019/.Garonzik2019_Tab2.tsv	1c597a4f1950...
pkdb_models/models/apixaban/data/apixaban/Garonzik2019/.Garonzik2019_TabGroups.tsv	b579825e6ab1...
pkdb_models/models/apixaban/data/apixaban/Garonzik2019/.Garonzik2019_TabInterventions.tsv	06e6bc7ed8a5...
pkdb_models/models/apixaban/data/apixaban/Jeong2019/.Jeong2019_Fig4.tsv	3db3d2bbe6c1...
pkdb_models/models/apixaban/data/apixaban/Jeong2019/.Jeong2019_Tab1.tsv	9a29f852a72a...
pkdb_models/models/apixaban/data/apixaban/Jeong2019/.Jeong2019_TabGroups.tsv	f9a18efd6bec...
pkdb_models/models/apixaban/data/apixaban/Jeong2019/.Jeong2019_TabInterventions.tsv	cd750ff00896...
pkdb_models/models/apixaban/data/apixaban/Kreutz2017/.Kreutz2017_Fig2.tsv	c7e7fa2aeec9...
pkdb_models/models/apixaban/data/apixaban/Kreutz2017/.Kreutz2017_Fig3.tsv	216b03d0818a...
pkdb_models/models/apixaban/data/apixaban/Kreutz2017/.Kreutz2017_Fig4.tsv	6a6c7f642285...
pkdb_models/models/apixaban/data/apixaban/Kreutz2017/.Kreutz2017_Fig6.tsv	6d31b7e2bebe...
pkdb_models/models/apixaban/data/apixaban/Kreutz2017/.Kreutz2017_FigS1.tsv	56fb1bd401d4...
pkdb_models/models/apixaban/data/apixaban/Kreutz2017/.Kreutz2017_FigS1Mean.tsv	e40ddaad8a2b...
pkdb_models/models/apixaban/data/apixaban/Kreutz2017/.Kreutz2017_FigS3.tsv	f2b6ba261408...
pkdb_models/models/apixaban/data/apixaban/Kreutz2017/.Kreutz2017_Tab2.tsv	0a2d6ebf560a...
pkdb_models/models/apixaban/data/apixaban/Kreutz2017/.Kreutz2017_TabGroups.tsv	e9c0b77517ec...
pkdb_models/models/apixaban/data/apixaban/Kreutz2017/.Kreutz2017_TabInterventions.tsv	926a1221fc08...
pkdb_models/models/apixaban/data/apixaban/Kreutz2017/.Kreutz2017_TabS2.tsv	63ebae2c77d8...
pkdb_models/models/apixaban/data/apixaban/Leong2024/.Leong2024_Fig1.tsv	dd5610269427...
pkdb_models/models/apixaban/data/apixaban/Leong2024/.Leong2024_Tab1.tsv	a4881810ec07...
pkdb_models/models/apixaban/data/apixaban/Leong2024/.Leong2024_TabGroups.tsv	0846344a1e90...
pkdb_models/models/apixaban/data/apixaban/Leong2024/.Leong2024_TabInterventions.tsv	035bf61f8386...
pkdb_models/models/apixaban/data/apixaban/Raghavan2009/.Raghavan2009_Fig1.tsv	65f6432cbad3...
pkdb_models/models/apixaban/data/apixaban/Raghavan2009/.Raghavan2009_Tab1.tsv	299deedd0254...
pkdb_models/models/apixaban/data/apixaban/Raghavan2009/.Raghavan2009_Tab2.tsv	36a39dfa03d0...
pkdb_models/models/apixaban/data/apixaban/Raghavan2009/.Raghavan2009_Tab3.tsv	68c1976b23b1...
pkdb_models/models/apixaban/data/apixaban/Raghavan2009/.Raghavan2009_Tab4.tsv	0befad351151...
pkdb_models/models/apixaban/data/apixaban/Raghavan2009/.Raghavan2009_TabGroups.tsv	36a31ac74113...

File	SHA-256
pkdb_models/models/apixaban/data/apixaban/Raghavan2009/.Raghavan2009_TabInterventions.tsv	e7f2336fd14c...
pkdb_models/models/apixaban/data/apixaban/Shaikh2021/.Shaikh2021_Fig5.tsv	c651e309a0c3...
pkdb_models/models/apixaban/data/apixaban/Shaikh2021/.Shaikh2021_Tab7.tsv	7081999bbf80...
pkdb_models/models/apixaban/data/apixaban/Shaikh2021/.Shaikh2021_TabGroups.tsv	a6ea9b1c38d8...
pkdb_models/models/apixaban/data/apixaban/Shaikh2021/.Shaikh2021_TabInterventions.tsv	65fb65517842...
pkdb_models/models/apixaban/data/apixaban/Song2015/.Song2015_Fig1.tsv	3bbca2a098e6...
pkdb_models/models/apixaban/data/apixaban/Song2015/.Song2015_Tab2.tsv	e41e7102f8b6...
pkdb_models/models/apixaban/data/apixaban/Song2015/.Song2015_TabGroups.tsv	95c61be72a38...
pkdb_models/models/apixaban/data/apixaban/Song2015/.Song2015_TabInterventions.tsv	f70c9c012d73...
pkdb_models/models/apixaban/data/apixaban/Song2016/.Song2016_Fig1.tsv	3ab4bd27cf4e...
pkdb_models/models/apixaban/data/apixaban/Song2016/.Song2016_Fig2.tsv	7ceec66bdcc4...
pkdb_models/models/apixaban/data/apixaban/Song2016/.Song2016_Tab3.tsv	5982202a277a...
pkdb_models/models/apixaban/data/apixaban/Song2016/.Song2016_TabGroups.tsv	35413265b827...
pkdb_models/models/apixaban/data/apixaban/Song2016/.Song2016_TabInterventions.tsv	d8ddb7e7276f...
pkdb_models/models/apixaban/data/apixaban/Tirona2018/.Tirona2018_Fig2.tsv	252993b155de...
pkdb_models/models/apixaban/data/apixaban/Tirona2018/.Tirona2018_Fig3.tsv	335f91bb4347...
pkdb_models/models/apixaban/data/apixaban/Tirona2018/.Tirona2018_Tab2.tsv	16b1faa6f4c9...
pkdb_models/models/apixaban/data/apixaban/Tirona2018/.Tirona2018_Tab4.tsv	1335086f751f...
pkdb_models/models/apixaban/data/apixaban/Tirona2018/.Tirona2018_TabGroups.tsv	492723fb7564...
pkdb_models/models/apixaban/data/apixaban/Tirona2018/.Tirona2018_TabIndividuals.tsv	e7af6a74b378...
pkdb_models/models/apixaban/data/apixaban/Tirona2018/.Tirona2018_TabInterventions.tsv	276c4b33f19c...
pkdb_models/models/apixaban/data/apixaban/Upreti2013/.Upreti2013_Fig1.tsv	f6c9ef7a563a...
pkdb_models/models/apixaban/data/apixaban/Upreti2013/.Upreti2013_Fig2.tsv	d101838279d1...
pkdb_models/models/apixaban/data/apixaban/Upreti2013/.Upreti2013_Fig4.tsv	1598d52daf69...
pkdb_models/models/apixaban/data/apixaban/Upreti2013/.Upreti2013_Tab2.tsv	eb19aaf84962...
pkdb_models/models/apixaban/data/apixaban/Upreti2013/.Upreti2013_TabGroups.tsv	8662c935279d...
pkdb_models/models/apixaban/data/apixaban/Upreti2013/.Upreti2013_TabInterventions.tsv	8bb5c2dde4a1...
pkdb_models/models/apixaban/data/apixaban/Upreti2013a/.Upreti2013a_Fig1.tsv	7dc35e549e22...
pkdb_models/models/apixaban/data/apixaban/Upreti2013a/.Upreti2013a_Tab2.tsv	dd02505d1777...
pkdb_models/models/apixaban/data/apixaban/Upreti2013a/.Upreti2013a_TabGroups.tsv	68ffd659dddb...
pkdb_models/models/apixaban/data/apixaban/Upreti2013a/.Upreti2013a_TabInterventions.tsv	0fe972fc0c4b...
pkdb_models/models/apixaban/data/apixaban/Vakkalagadda2016/.Vakkalagadda2016_Fig2.tsv	d78646da82cf...
pkdb_models/models/apixaban/data/apixaban/Vakkalagadda2016/.Vakkalagadda2016_Tab2.tsv	a7dbaab4583e...
pkdb_models/models/apixaban/data/apixaban/Vakkalagadda2016/.Vakkalagadda2016_TabGroups.tsv	015cb6c8c68c...
pkdb_models/models/apixaban/data/apixaban/Vakkalagadda2016/.Vakkalagadda2016_TabInterventions.tsv	ef63545d381e...

File	SHA-256
pkdb_models/models/apixaban/data/apixaban/VandenBosch2021/.VandenBosch2021_Fig1.tsv	f09f235a4989...
pkdb_models/models/apixaban/data/apixaban/VandenBosch2021/.VandenBosch2021_Fig1Mean.tsv	11e436bad316...
pkdb_models/models/apixaban/data/apixaban/VandenBosch2021/.VandenBosch2021_Tab2.tsv	ad013a1bdae1...
pkdb_models/models/apixaban/data/apixaban/VandenBosch2021/.VandenBosch2021_TabGroups.tsv	06c421f53132...
pkdb_models/models/apixaban/data/apixaban/VandenBosch2021/.VandenBosch2021_TabIndividuals.tsv	73e71b755348...
pkdb_models/models/apixaban/data/apixaban/VandenBosch2021/.VandenBosch2021_TabInterventions.tsv	6873b5d73ab4...
pkdb_models/models/apixaban/data/apixaban/Wang2014/.Wang2014_Fig1.tsv	2ecf2531bbb7...
pkdb_models/models/apixaban/data/apixaban/Wang2014/.Wang2014_Tab2.tsv	674124e08f3b...
pkdb_models/models/apixaban/data/apixaban/Wang2014/.Wang2014_TabGroups.tsv	208df48fea42...
pkdb_models/models/apixaban/data/apixaban/Wang2014/.Wang2014_TabInterventions.tsv	f4a049103f08...
pkdb_models/models/apixaban/data/apixaban/Wang2016/.Wang2016_Fig1.tsv	920c0175f4a6...
pkdb_models/models/apixaban/data/apixaban/Wang2016/.Wang2016_Fig2.tsv	bf7cf854ad2e...
pkdb_models/models/apixaban/data/apixaban/Wang2016/.Wang2016_Fig3.tsv	fb1d02245de4...
pkdb_models/models/apixaban/data/apixaban/Wang2016/.Wang2016_Tab2.tsv	04922da320dc...
pkdb_models/models/apixaban/data/apixaban/Wang2016/.Wang2016_Tab3.tsv	e08c4a7af828...
pkdb_models/models/apixaban/data/apixaban/Wang2016/.Wang2016_TabGroups.tsv	88b151d48cd5...
pkdb_models/models/apixaban/data/apixaban/Wang2016/.Wang2016_TabInterventions.tsv	8c584cfefec3...
pkdb_models/models/apixaban/data/edoxaban/Lenard2024/.Lenard2024_Fig2.tsv	423039c46b9e...
pkdb_models/models/apixaban/data/edoxaban/Lenard2024/.Lenard2024_Tab1.tsv	dc2a98875cc5...
pkdb_models/models/apixaban/data/edoxaban/Lenard2024/.Lenard2024_Tab2.tsv	7c2cf210c32d...
pkdb_models/models/apixaban/data/edoxaban/Lenard2024/.Lenard2024_TabGroups.tsv	1563a66c5472...
pkdb_models/models/apixaban/data/edoxaban/Lenard2024/.Lenard2024_TabInterventions.tsv	619f32a2071c...
pkdb_models/models/apixaban/data/edoxaban/Lenard2024/.Lenard2024_Tab_Supplement.tsv	3ba8777b45fe...
pkdb_models/models/apixaban/data/edoxaban/Lenard2025/.Lenard2025_Fig2.tsv	83bfc6284535...
pkdb_models/models/apixaban/data/edoxaban/Lenard2025/.Lenard2025_Fig3.tsv	eb016d3f1e83...
pkdb_models/models/apixaban/data/edoxaban/Lenard2025/.Lenard2025_Fig4.tsv	91d3fe3baf45...
pkdb_models/models/apixaban/data/edoxaban/Lenard2025/.Lenard2025_Tab1.tsv	effb97b89eb3...
pkdb_models/models/apixaban/data/edoxaban/Lenard2025/.Lenard2025_Tab2.tsv	8dae4e8812a1...
pkdb_models/models/apixaban/data/edoxaban/Lenard2025/.Lenard2025_Tab3.tsv	f7b8f4279c5e...
pkdb_models/models/apixaban/data/edoxaban/Lenard2025/.Lenard2025_TabGroups.tsv	1e834066fe0e...
pkdb_models/models/apixaban/data/edoxaban/Lenard2025/.Lenard2025_TabInterventions.tsv	07a85425e0f0...
pkdb_models/models/apixaban/data/edoxaban/Metze2021/.Metze2021_Fig1.tsv	ca020ef70189...
pkdb_models/models/apixaban/data/edoxaban/Metze2021/.Metze2021_Fig1A.tsv	12058b665e4d...
pkdb_models/models/apixaban/data/edoxaban/Metze2021/.Metze2021_Tab2.tsv	9c4de7b2dd65...
pkdb_models/models/apixaban/data/edoxaban/Metze2021/.Metze2021_TabGroups.tsv	5096f3d68a1f...

File	SHA-256
pkdb_models/models/apixaban/data/edoxaban/Metze2021/.Metze2021_TabIndividuals.tsv	632b916218ea...
pkdb_models/models/apixaban/data/edoxaban/Metze2021/.Metze2021_TabInterventions.tsv	49d1be28ea4f...
pkdb_models/models/apixaban/data/edoxaban/Mikus2019/.Mikus2019_Fig1.tsv	59185a3c8dd5...
pkdb_models/models/apixaban/data/edoxaban/Mikus2019/.Mikus2019_Tab1.tsv	e0786eb279dd...
pkdb_models/models/apixaban/data/edoxaban/Mikus2019/.Mikus2019_Tab1A.tsv	927240983aba...
pkdb_models/models/apixaban/data/edoxaban/Mikus2019/.Mikus2019_Tab2.tsv	be2871b2ca60...
pkdb_models/models/apixaban/data/edoxaban/Mikus2019/.Mikus2019_Tab2A.tsv	4e2120285093...
pkdb_models/models/apixaban/data/edoxaban/Mikus2019/.Mikus2019_Tab4.tsv	edcb10ed72d4...
pkdb_models/models/apixaban/data/edoxaban/Mikus2019/.Mikus2019_TabGroups.tsv	cf6e4c68ff98...
pkdb_models/models/apixaban/data/edoxaban/Mikus2019/.Mikus2019_TabInterventions.tsv	6fe0c4ade5d2...
pkdb_models/models/apixaban/data/edoxaban/Rohr2024/.Rohr2024_Fig2.tsv	4ee678239d5e...
pkdb_models/models/apixaban/data/edoxaban/Rohr2024/.Rohr2024_Tab1.tsv	50ef32d48f1e...
pkdb_models/models/apixaban/data/edoxaban/Rohr2024/.Rohr2024_Tab1A.tsv	f055c17935cb...
pkdb_models/models/apixaban/data/edoxaban/Rohr2024/.Rohr2024_TabGroups.tsv	ffc6e39721c6...
pkdb_models/models/apixaban/data/edoxaban/Rohr2024/.Rohr2024_TabInterventions.tsv	544c2fd7c13c...
pkdb_models/models/apixaban/models/output/models/apixaban_body_flat.xml	995e08478f28...

2 Results: Apixaban PBPK/PD model: fit PK

2.1 Parameters

Table 2: Parameters of the fit PK_20261017_103232__85dfa, the parameter set PK_20261017_103232__85dfa_0, cost 138, with their bounds in the optimization. The 95% confidence intervals are those of the profile likelihood, LB and UB an interval which is open towards the lower or the upper bound, and the Wald intervals of the Fisher information for a parameter without a profile. Identifiable is the classification of the profile: yes, no (LB) or no (UB) if the profile does not reach the threshold towards the lower or the upper bound, no if it reaches it on neither side, structural if it is flat.

Parameter	Description	Value [95% CI]	Unit	Bounds	Identifiable
ftissue_api	tissue distribution api	4.9 [3.32, UB]	l/min	[0.02, 5]	no (UB)
Kp_api	tissue/unbound plasma partition coefficient (Kp,u) api	1.4 [1.21, 1.62]	dimensionless	[0.3, 15]	yes
LI__API2M_k	rate of the CYP3A4 metabolism of apixaban	0.0876 [0.0696, 0.107]	1/min	[0.005, 1]	yes
KI__APIEX_f	renal clearance of unbound apixaban relative to the GFR	1.01 [0.908, 1.13]	dimensionless	[0.3, 3]	yes
GU__APISEC_k	intestinal secretion clearance of unbound apixaban	0.427 [0.22, 0.783]	l/min	[0.001, 10]	yes
GU__APIABS_k	rate of apixaban absorption	0.0185 [0.014, 0.0256]	1/min	[0.0001, 1]	yes
GU__SITRANS_k	rate of the small intestinal transit	0.00735 [0.00606, 0.00891]	1/min	[0.00208, 0.0167]	yes

Parameter	Description	Value [95% CI]	Unit	Bounds	Identifiable
GU__Ka_dis_api	Ka_dis [1/hr] dissolution apixaban in tablet	1.63 [1.19, 2.6]	1/hr	[0.05, 10]	yes
GU__Ka_sol_api	Ka_sol [1/hr] transport apixaban in solution	6.41 [3.28, UB]	1/hr	[0.1, 20]	no (UB)
GU__PODOSE_50	undissolved dose of half-maximal dissolution [mg]	5.74 [3.28, 8.87]	mg	[1, 500]	yes
KI__M1EX_f	renal clearance of M1 relative to the GFR	0.046 [0.0324, 0.061]	dimensionless	[0.01, 10]	yes
KI__M7EX_f	renal clearance of M7 relative to the GFR	0.0142 [LB, 0.0245]	dimensionless	[0.01, 10]	no (LB)
LI__MXEXBI_k	rate of the biliary excretion of the apixaban metabolites	0.00245 [0.00171, 0.0033]	1/min	[0.0001, 1]	yes
LI__M22M1_k	rate of the sulfation M2 -> M1	0.000493 [0.000277, 0.000853]	1/min	[0.0001, 0.1]	yes

2.2 Data

Table 3: Data of the fit PK_20261017_103232__85dfa: the number of fit mappings and, in parentheses, of data points per study and kind. The training data enters the cost, the validation data and the outliers are evaluated only.

Study	Training	Validation	Outlier	Total
Abdollahizad2025	1 (17)	-	-	1 (17)
Bashir2018	1 (8)	2 (16)	-	3 (24)
Chang2016	-	8 (80)	-	8 (80)
Cui2013	1 (15)	1 (15)	-	2 (30)
Frost2013	8 (118)	1 (13)	-	9 (131)
Frost2013a	-	6 (156)	-	6 (156)
Frost2014	-	1 (22)	-	1 (22)
Frost2014a	1 (14)	-	-	1 (14)
Frost2015	3 (30)	3 (31)	-	6 (61)
Frost2015a	2 (24)	2 (24)	-	4 (48)
Frost2015b	4 (44)	-	-	4 (44)
Frost2017	1 (12)	1 (12)	-	2 (24)
Frost2018	16 (132)	-	-	16 (132)
Frost2021	12 (95)	-	-	12 (95)
Frost2021a	2 (18)	4 (37)	-	6 (55)
Garonzik2019	1 (9)	1 (9)	-	2 (18)
Jeong2019	-	3 (27)	-	3 (27)
Kreutz2017	-	1 (24)	-	1 (24)
Lenard2024	1 (17)	1 (17)	-	2 (34)
Lenard2025	3 (51)	3 (51)	-	6 (102)
Leong2024	-	2 (38)	-	2 (38)
Metze2021	-	1 (4)	-	1 (4)

Study	Training	Validation	Outlier	Total
Mikus2019	2 (17)	2 (17)	-	4 (34)
Raghavan2009	16 (58)	4 (8)	-	20 (66)
Rohr2024	2 (14)	2 (14)	-	4 (28)
Shaikh2021	2 (50)	-	-	2 (50)
Song2015	4 (64)	4 (64)	-	8 (128)
Song2016	2 (28)	3 (44)	-	5 (72)
Tirona2018	-	4 (22)	-	4 (22)
Upreti2013	2 (17)	4 (34)	-	6 (51)
Upreti2013a	1 (12)	1 (12)	-	2 (24)
Vakkalagadda2016	4 (28)	4 (25)	-	8 (53)
VandenBosch2021	-	2 (14)	-	2 (14)
Wang2014	1 (18)	-	-	1 (18)
Wang2016	2 (20)	3 (38)	-	5 (58)
Total	95 (930)	74 (868)	-	169 (1798)

2.3 Goodness of fit

Table 4: Goodness of fit of the fit PK_20261017_103232__85dfa per kind of data, the parameter set PK_20261017_103232__85dfa_0. The cost is defined on the training data only, 2-fold is the percentage of the data points with a positive value and prediction whose prediction is within twofold of the data.

Kind	n	cost	MSE	RMSE	NRMSE	RMSE_w	R^2	2-fold [%]	AIC	BIC
training	930	138	9.08e-08	0.000301	0.313	0.545	0.904	79.9	−15051.6	−14983.9
validation	868	-	1.2e-07	0.000346	3.13	6.88	0.696	78.6	−13805.9	−13739.1

2.4 Figures

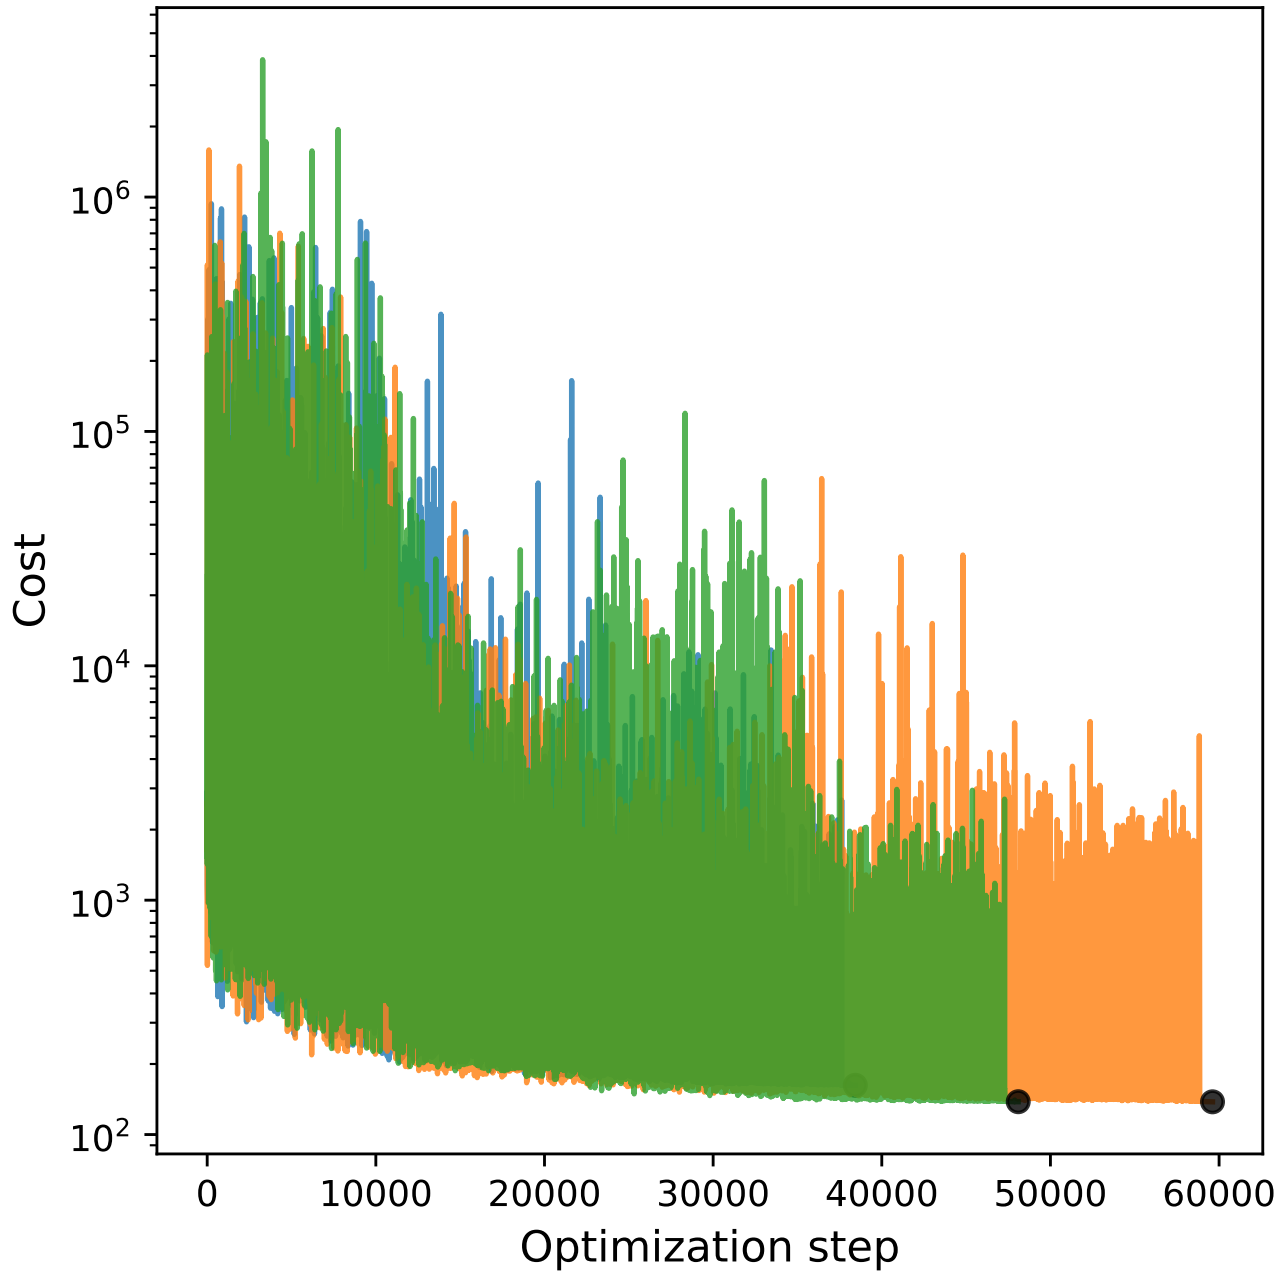


Figure 1: Cost of the optimizers over their steps, fit PK_20261017_103232__85dfa. The cost of every optimization run over its steps. Runs which end at the same cost found the same optimum; a run which stops much higher is stuck in a local minimum.

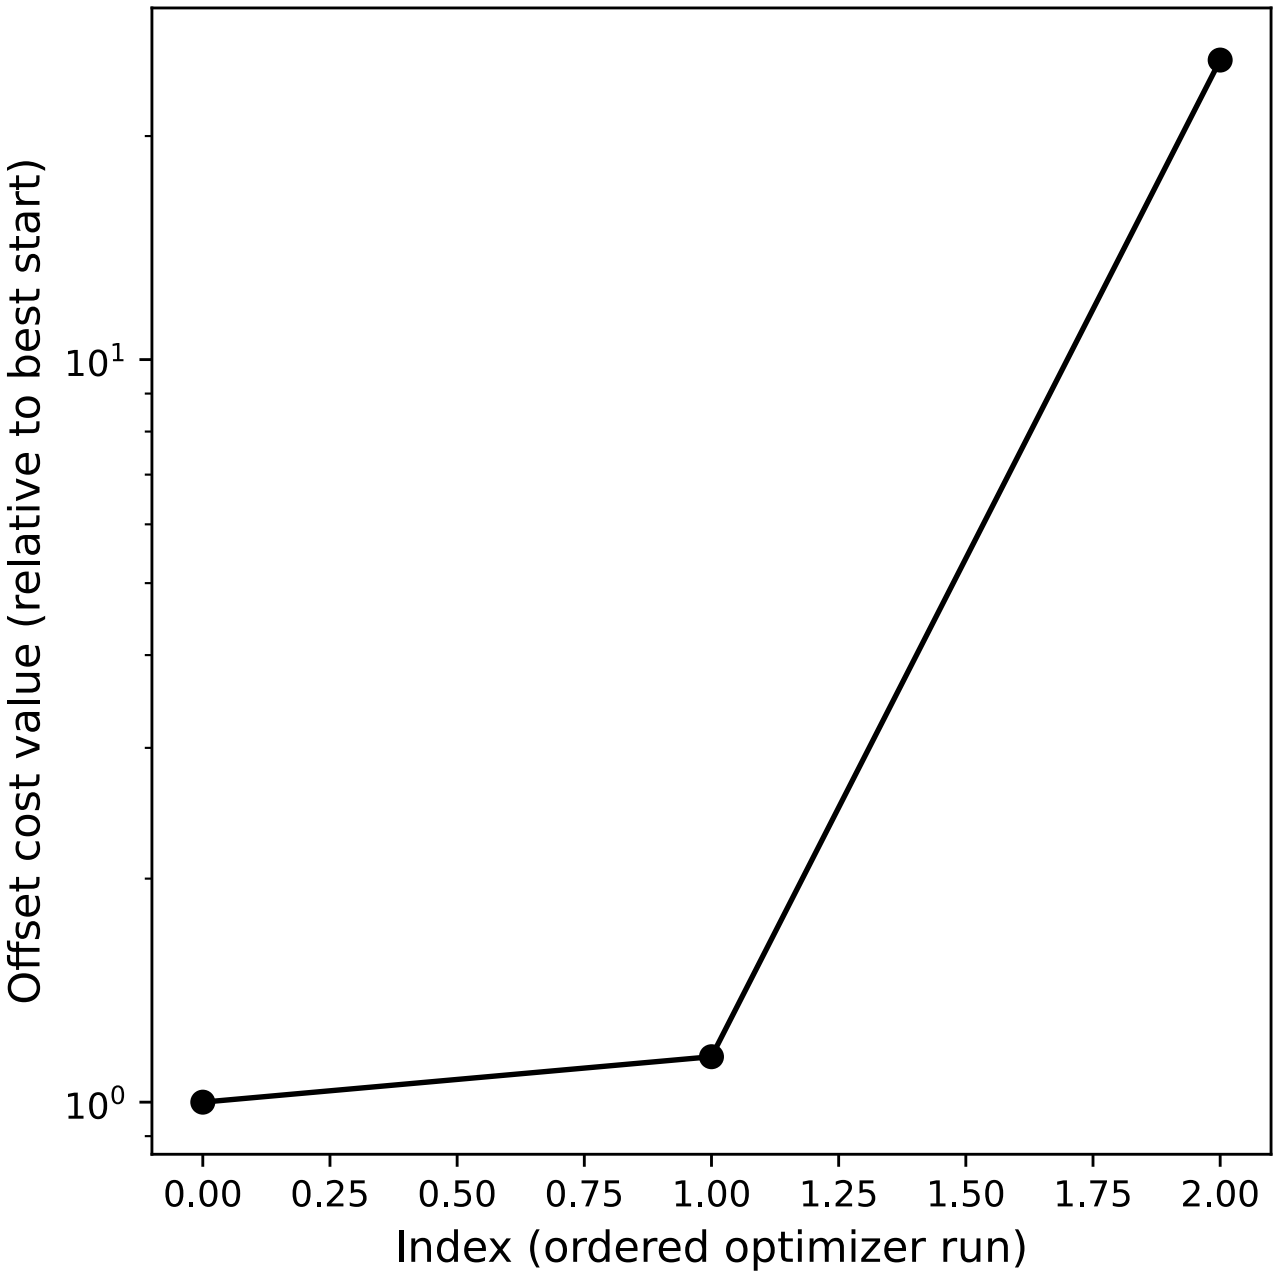


Figure 2: Cost of the optimization runs, ordered, fit PK_20261017_103232__85dfa. The final cost of the runs, ordered. A flat plateau at the left is the global optimum found repeatedly, which is the evidence that the multistart converged; steps to the right are local minima.

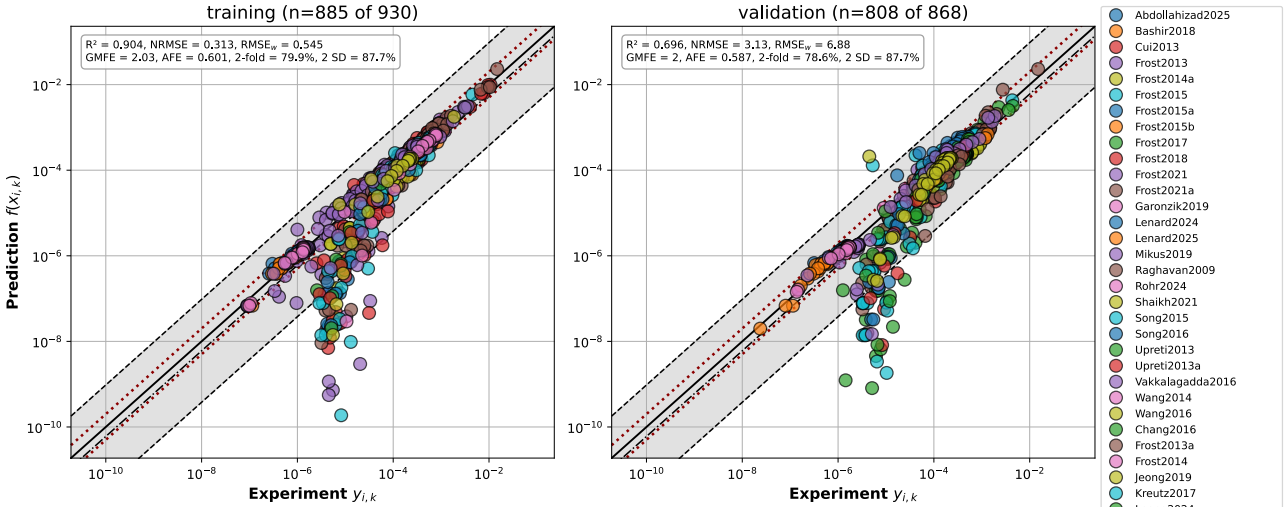


Figure 3: Prediction against the measured data points, per kind of fit mapping, with the agreement of the training data, the lines of twofold and the metrics of the panel, fit PK_20261017_103232__85dfa. Within twofold of the data are 707 of the 885 training data points (79.9%) and 635 of the 808 validation data points (78.6%); only the data points with a positive value and prediction are counted. Prediction against measurement, one point per data point, with a panel per kind of fit mapping. The points scatter around the diagonal when the model describes the data; a systematic deviation from it is a systematic error of the model. The band is the agreement of the training data, i.e. the same band the Bland-Altman plot draws, here as lines parallel to the diagonal. The dark red dotted lines are twofold, prediction = 2 x measurement and prediction = measurement / 2; the caption states the points between them of every kind. A point which is zero or negative is not drawn on the logarithmic axes and not counted, the title of a panel then states the points drawn of all. The validation panel shows how the fit describes data it was not fitted on, the outlier panel the data the fit dropped. The box of a panel carries its R^2, its normalized RMSE, the RMSE of the residuals of the cost, its fold errors GMFE and AFE and the percentages of its points within twofold and within two standard deviations of the data.

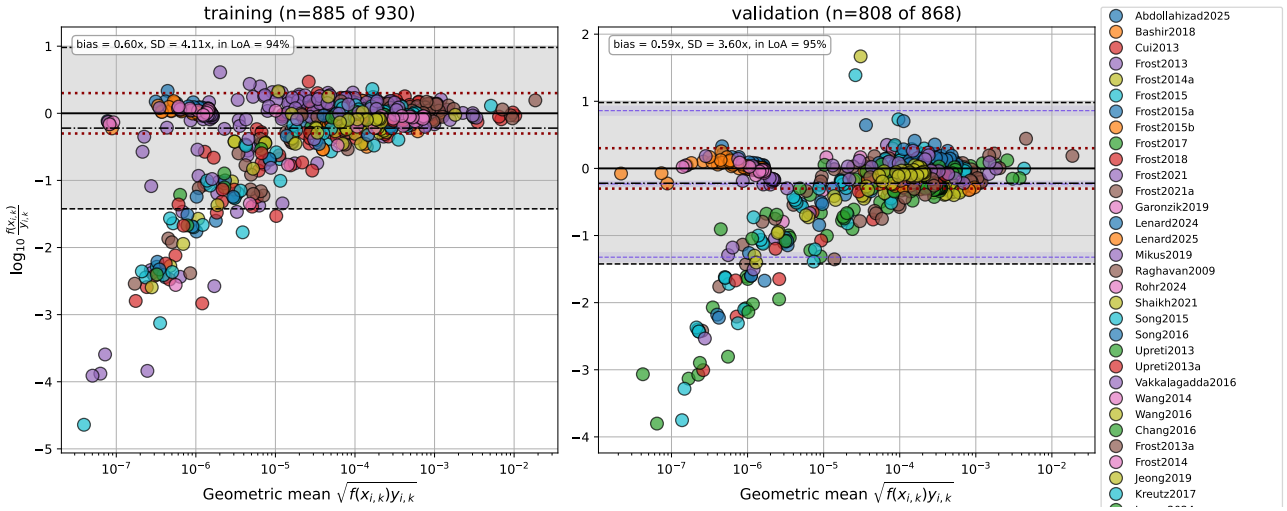


Figure 4: Agreement of prediction and measurement as a ratio, per kind of fit mapping, with the agreement of the training data and the agreement of the panel, fit PK_20261017_103232__85dfa. The ratio of prediction and measurement over the geometric mean of the two, i.e. the goodness of fit with the diagonal turned into the horizontal. The band is the same, the bias and the limits of agreement `bias ± 1.96 SD` of the training data as fold factors. A bias away from 1 is a systematic over- or underprediction, wide limits are a large scatter, and a trend over the mean is a model which describes the large or the small values better. The box of a panel carries the bias and the SD of its own points as fold factors and the share of them inside the limits of agreement of the training data.

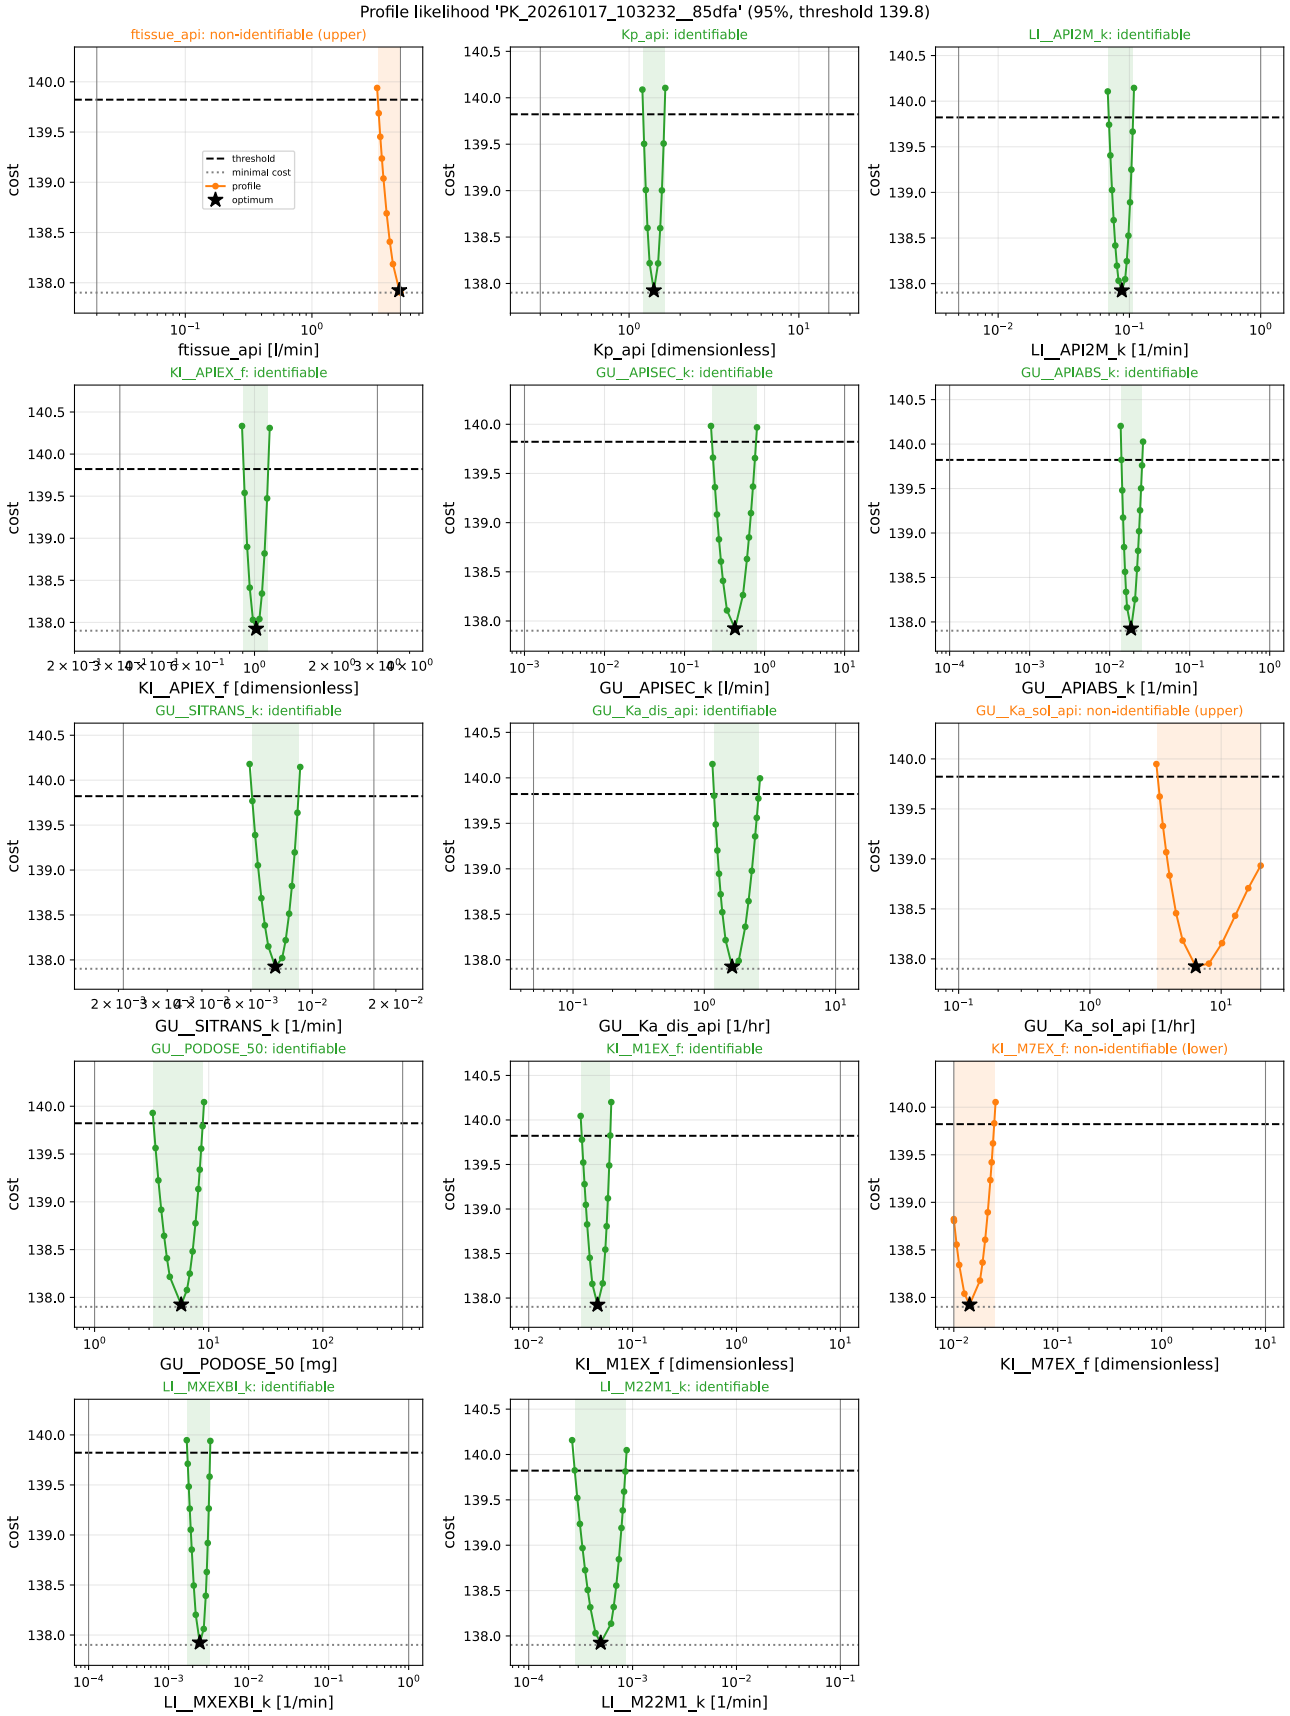


Figure 5: Profile likelihood of every parameter: the cost with the parameter fixed and the other parameters optimized, the threshold of the confidence level and the confidence interval, fit PK_20261017_103232__85dfa. One profile per parameter. A profile which crosses the dashed threshold on both sides gives a finite confidence interval; one which stays below it up to a bound is practically non-identifiable; a flat profile is structurally non-identifiable, the parameter is compensated by the others.

2.5 Provenance

Table 5: Provenance of the fit PK_20261017_103232__85dfa: the versions it ran with and the revision of its models and data; the SHA-256 checksums of the models and data are listed in Table 1.

Item	Value
Fit	`PK_20261017_103232__85dfa`
Created	2026-10-17 08:32:37 UTC
Seed	1234
Python	3.14.4
sbmlsim	0.10.0
libRoadRunner	2.10.0
SciPy	1.18.1
NumPy	2.5.3
Repository	`/home/mkoenig/git/pkdb_models-apixaban`
Commit	`62f53da3ca7dc6c45fe2e74e456ec4d8879f17b7`
Uncommitted changes	no

Bibliography

[1] M. König, "sbmlsim: SBML simulation made easy." Zenodo, 2026. doi: 10.5281/zenodo.3597770. Version 0.10.0.

[2] R. Storn and K. Price, "Differential evolution - a simple and efficient heuristic for global optimization over continuous spaces," *Journal of Global Optimization*, vol. 11, pp. 341–359, 1997, doi: 10.1023/A:1008202821328.

[3] P. Virtanen *et al.*, "SciPy 1.0: fundamental algorithms for scientific computing in Python," *Nature Methods*, vol. 17, pp. 261–272, 2020, doi: 10.1038/s41592-019-0686-2. Version 1.18.1.

[4] M. D. McKay, R. J. Beckman, and W. J. Conover, "A comparison of three methods for selecting values of input variables in the analysis of output from a computer code," *Technometrics*, vol. 21, no. 2, pp. 239–245, 1979, doi: 10.2307/1268522.

[5] C. Welsh, J. Xu, L. Smith, M. König, K. Choi, and H. M. Sauro, "libRoadRunner 2.0: a high performance SBML simulation and analysis library," *Bioinformatics*, vol. 39, no. 1, p. btac770, 2023, doi: 10.1093/bioinformatics/btac770. Version 2.10.0.

[6] A. C. Hindmarsh *et al.*, "SUNDIALS: suite of nonlinear and differential/algebraic equation solvers," *ACM Transactions on Mathematical Software*, vol. 31, no. 3, pp. 363–396, 2005, doi: 10.1145/1089014.1089020.

[7] H. Akaike, "A new look at the statistical model identification," *IEEE Transactions on Automatic Control*, vol. 19, no. 6, pp. 716–723, 1974, doi: 10.1109/TAC.1974.1100705.

[8] G. Schwarz, "Estimating the dimension of a model," *The Annals of Statistics*, vol. 6, no. 2, pp. 461–464, 1978, doi: 10.1214/aos/1176344136.

[9] J. M. Bland and D. G. Altman, "Statistical methods for assessing agreement between two methods of clinical measurement," *The Lancet*, vol. 327, no. 8476, pp. 307–310, 1986, doi: 10.1016/S0140-6736(86)90837-8.

[10] A. Raue *et al.*, "Structural and practical identifiability analysis of partially observed dynamical models by exploiting the profile likelihood," *Bioinformatics*, vol. 25, no. 15, pp. 1923–1929, 2009, doi: 10.1093/bioinformatics/btp358.

[11] C. Kreutz, A. Raue, D. Kaschek, and J. Timmer, "Profile likelihood in systems biology," *The FEBS Journal*, vol. 280, no. 11, pp. 2564–2571, 2013, doi: 10.1111/febs.12276.

[12] F.-G. Wieland, A. L. Hauber, M. Rosenblatt, C. Tönsing, and J. Timmer, "On structural and practical identifiability," *Current Opinion in Systems Biology*, vol. 25, pp. 60–69, 2021, doi: 10.1016/j.coisb.2021.03.005.

[13] C. R. Harris *et al.*, "Array programming with NumPy," *Nature*, vol. 585, pp. 357–362, 2020, doi: 10.1038/s41586-020-2649-2. Version 2.5.3.