

R Notebook

```
library(dplyr)
```

```
##
## Attaching package: 'dplyr'

## The following objects are masked from 'package:stats':
##
##   filter, lag

## The following objects are masked from 'package:base':
##
##   intersect, setdiff, setequal, union
```

```
library(tidyr)
library(stringr)
library(ggplot2)
library(RColorBrewer)
library(tidyverse)
```

```
## -- Attaching core tidyverse packages ----- tidyverse 2.0.0 --
## v forcats   1.0.0      v readr     2.1.5
## v lubridate 1.9.4      v tibble  3.3.0
## v purrr     1.0.4
```

```
## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()     masks stats::lag()
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors
```

```
library(knitr)
library(kableExtra)
```

```
##
## Attaching package: 'kableExtra'
##
## The following object is masked from 'package:dplyr':
##
##   group_rows
```

```
library(rstatix)
```

```
##
## Attaching package: 'rstatix'
##
## The following object is masked from 'package:stats':
##
##   filter
```

```
library(coin)
```

```
## Loading required package: survival
##
## Attaching package: 'coin'
##
## The following objects are masked from 'package:rstatix':
##
##   chisq_test, friedman_test, kruskal_test, sign_test, wilcox_test
```

```
library(patchwork)
library(ggpubr)
library(viridis)
```

```
## Loading required package: viridisLite
```

```
source("/Users/mattparker/Dropbox/Workspace/moops/manuscript1/helper_utils.r")
knitr::opts_chunk$set(dev = "cairo_pdf")
```

```
# List all CSV files in the directory
csv_files <- list.files(path = "/Users/mattparker/Dropbox/Workspace/moops/manuscript1/data/experiment_a
seq_metrics = read.csv("/Users/mattparker/Dropbox/Workspace/moops/manuscript1/data/sequencing_summary_m

# Process all CSV files and combine them
all_data <- bind_rows(lapply(csv_files, process_csv_file))

# Pond sample names
pond_samples = c("s9", "s10", "s19", "s20")

# Create sample metadata using helper function
sample_metadata = create_sample_metadata(seq_metrics, pond_samples) %>%
  select(sample_name, base_sample, library_prep, experiment, water_control, infection_class, sample_type)

# Merge the taxonomy data with metadata
merged_data <- all_data %>%
  left_join(sample_metadata, by = "sample_name")

# Extract HPV data before filtering
hpv_data = merged_data %>%
  filter(experiment == 1 | experiment == 2) %>%
  filter(str_detect(name, regex("Alphapapillomavirus", ignore_case = TRUE)))

pcv_data = merged_data %>%
  filter((experiment == 1 & library_prep == "MSSPE")) %>%
  filter(str_detect(name, regex("Circovirus sp.", ignore_case = TRUE)))
```

```

# Filter to include only species level (tax_level == 1) to avoid duplication
all_data_species <- merged_data %>%
  filter(tax_level == 1) %>%
  filter(nt_rpm >= 1) %>% # so zeros don't skew comparison
  filter(water_control == "No") %>% # filter out Negative Controls
  filter(infection_class != "Definite") %>% # filter out positive control samples
  add_row(hpv_data) # but keep hpv data

# Assign standardized names for viral targets
name_targets = c(
  "PBoV", # Porcine bocavirus
  "PCV", # Porcine circovirus 2
  "PKV", # Porcine kobuvirus / Aichivirus C
  "EV-G", # Porcine enterovirus G
  "PTeV", # Porcine teschovirus A
  "PAstV", # Porcine astrovirus 4
  "PSapoV", # Porcine sapovirus
  "PSapeV", # Porcine sapelovirus
  "HPV18" # Human papillomavirus 7/18
)

# Filter to viral category and exclude phages
all_viruses <- all_data_species %>%
  filter(category == "viruses") %>%
  filter(is_phage == "false") %>%
  filter(!str_detect(name, paste(c("Siphoviridae", "Podoviridae", "Myoviridae"), collapse = "|")))

# Add standardized name groups using helper function
all_viruses = add_viral_name_groups(all_viruses)

# Small constant for log transformation of zero RPM values
eps <- 0.1

# Filter to only the target viral species or genus
only_viral_targets = all_viruses %>%
  group_by(base_sample, library_prep, name_group) %>%
  filter(str_detect(name_group, regex(paste0("\\b(", paste(name_targets, collapse="|"), ")\\b"), ignore.case = TRUE)))
  summarize(rpm_sum = sum(nt_rpm, na.rm=TRUE), .groups="drop") %>% # sum rPM for each target
  pivot_wider(
    names_from = library_prep,
    values_from = rpm_sum
  ) %>%
  mutate(
    MSSPE = replace_na(MSSPE, 0.1), # Set NAs to 0.1 for non-detections
    NGS = replace_na(NGS, 0.1), # Set NAs to 0.1 for non-detections
    rpm_enrichment = (`MSSPE` + eps)/(`NGS` + eps),
    log2FC = log2(rpm_enrichment),
    name_group = fct_reorder(name_group, log2FC, .fun = mean, .desc = TRUE)
  ) %>%
  arrange(desc(log2FC))

# calculate average enrichment for all targets
mean_enrich_overall = only_viral_targets %>%

```

```

summarise(
  mean_log2FC = mean(log2FC),
  median_foldchange = median(rpm_enrichment),
  mean_foldchange = mean(rpm_enrichment))

mean_enrich_overall

## # A tibble: 1 x 3
##   mean_log2FC median_foldchange mean_foldchange
##   <dbl>         <dbl>         <dbl>
## 1      0.940           1.86           4.12

# calculate mean so we can add to the boxplot
mean_df <- only_viral_targets %>%
  group_by(name_group) %>%
  summarise(mean_value = mean(rpm_enrichment, na.rm = TRUE), median_value = median(rpm_enrichment, na.rm = TRUE))


# plot fold change across all samples
alltarget_boxplot <- ggplot(only_viral_targets, aes(x = name_group, y = rpm_enrichment)) +
  geom_boxplot(width = 0.8, outlier.shape = 21, outlier.fill = "white", alpha = 0.6, width = 0.6, color = "black",
  scale_y_log10() +
  geom_jitter(width = 0.1, alpha = 0.6, size = 1.5, color = "#3C8DBC") + # Professional blue
  geom_hline(yintercept = 0, linetype = "dashed") +
  #dotted mean line
  geom_segment(
    data = mean_df,
    aes(x = as.numeric(name_group) - 0.3,
        xend = as.numeric(name_group) + 0.3,
        y = mean_value, yend = mean_value),
    inherit.aes = FALSE,
    linetype = "dashed", color = "black", linewidth = 0.6
  ) +
  geom_text(data = mean_df, aes(x = name_group, y = mean_value, label = paste0(" ", round(mean_value, 1))),
  scale_x_discrete() + # adds space between boxes for labels
  labs(
    title = "",
    x = "",
    y = "Fold enrichment (log10)",
  ) +
  theme_bw() +
  theme(
    legend.position = "none",
    axis.text.x = element_text(angle = 45, hjust = 1),
  )

```

```
## Warning: Duplicated aesthetics after name standardisation: width
```

```
alltarget_boxplot
```

```
## Warning in scale_y_log10(): log-10 transformation introduced infinite values.
```

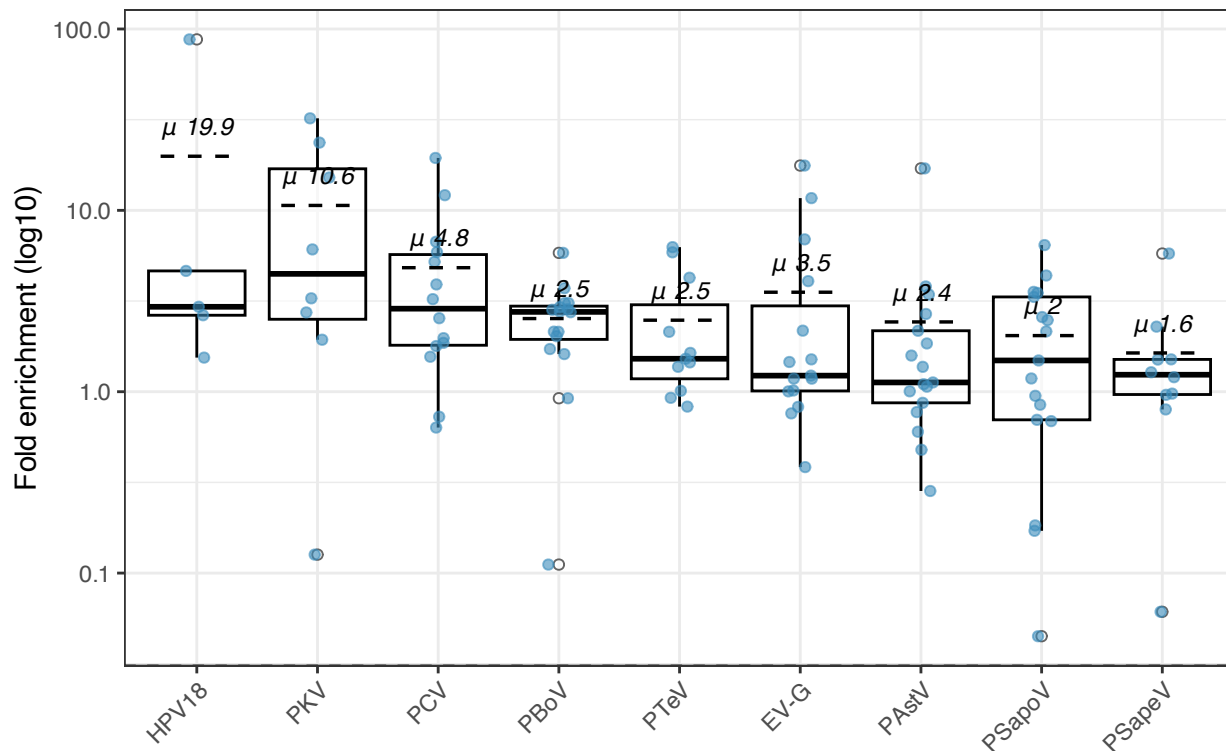

Viral Enrichment w/o primers from experiment 1

```
# Create separate dataset for experiment 1 analysis
merged_data_exp1 <- all_data %>%
  left_join(sample_metadata, by = "sample_name")

# Filter to include only species level (tax_level == 1) to avoid duplication
all_data_species_exp1 <- merged_data_exp1 %>%
  filter(tax_level == 1) %>%
  filter(experiment == 1) %>% # Only experiment 1
  filter(water_control == "No") %>% # Exclude negative controls
  filter(infection_class != "Definite") %>% # Exclude positive controls
  filter(nt_rpm >= 1) # rpm at least 1

# Filter to viral category and exclude phages
all_viruses_exp1 <- all_data_species_exp1 %>%
  filter(category == "viruses") %>%
  filter(is_phage == "false")

# Add standardized name groups using helper function
all_viruses_exp1 = add_viral_name_groups(all_viruses_exp1) %>%
  filter(!name_group %in% c("HPV18", "PCV"))

# Filter to only the target viral species or genus
only_viral_targets_exp1 = all_viruses_exp1 %>%
  group_by(base_sample, library_prep, name_group) %>%
  filter(str_detect(name_group, regex(paste0("\\b(", paste(name_targets, collapse="|"), ")\\b"), ignore.case = TRUE))) %>%
  summarize(rpm_sum = sum(nt_rpm, na.rm=TRUE), .groups="drop") %>%
  pivot_wider(
    names_from = library_prep,
```

```

    values_from = rpm_sum
  ) %>%
  mutate(
    MSSPE = replace_na(MSSPE, 0.1), # Set NAs to 0 for non-detections
    NGS = replace_na(NGS, 0.1), # Set NAs to 0 for non-detections
    rpm_enrichment = (`MSSPE` + eps)/(`NGS` + eps),
    log2FC = log2(rpm_enrichment),
    name_group = fct_reorder(name_group, log2FC, .fun = mean, .desc = TRUE)
  ) %>%
  arrange(desc(log2FC))

# calculate average enrichment for all targets
mean_enrich_overall_exp1 = only_viral_targets_exp1 %>%
  filter(name_group != "PToV*") %>%
  summarise(mean_log2FC = mean(log2FC), median_foldchange = median(rpm_enrichment))

mean_enrich_overall_exp1

```

```

## # A tibble: 1 x 2
##   mean_log2FC median_foldchange
##   <dbl>         <dbl>
## 1      0.362           1.23

```

```

# calculate mean so we can add to the boxplot
mean_df_exp1 <- only_viral_targets_exp1 %>%
  group_by(name_group) %>%
  summarise(mean_value = mean(rpm_enrichment, na.rm = TRUE))

# plot fold change across all samples
alltarget_boxplot_exp1 <- ggplot(only_viral_targets_exp1, aes(x = name_group, y = rpm_enrichment)) +
  geom_boxplot(width = 0.8, outlier.shape = 21, outlier.fill = "white", alpha = 0.6, width = 0.6, color = "white",
    scale_y_log10() +
  geom_jitter(width = 0.1, alpha = 0.6, size = 1.5, color = "#E67E22") + # Professional orange
  geom_hline(yintercept = 0, linetype = "dashed") +
  # dotted mean line
  geom_segment(
    data = mean_df_exp1,
    aes(x = as.numeric(name_group) - 0.3,
      xend = as.numeric(name_group) + 0.3,
      y = mean_value, yend = mean_value),
    inherit.aes = FALSE,
    linetype = "dotted", color = "red", linewidth = 0.6
  ) +
  geom_text(data = mean_df_exp1, aes(x = name_group, y = mean_value, label = paste0(" ", round(mean_value, 1)))),
    scale_x_discrete() + # adds space between boxes for labels
  labs(
    title = "Viral Enrichment (Experiment 1)",
    x = "",
    y = "Fold enrichment",
  ) +
  theme_bw() +
  theme(
    legend.position = "none",


```

```
axis.text.x = element_text(angle = 45, hjust = 1),
)
```

```
## Warning: Duplicated aesthetics after name standardisation: width
```

```
alltarget_boxplot_exp1
```

```
## Warning in scale_y_log10(): log-10 transformation introduced infinite values.
```

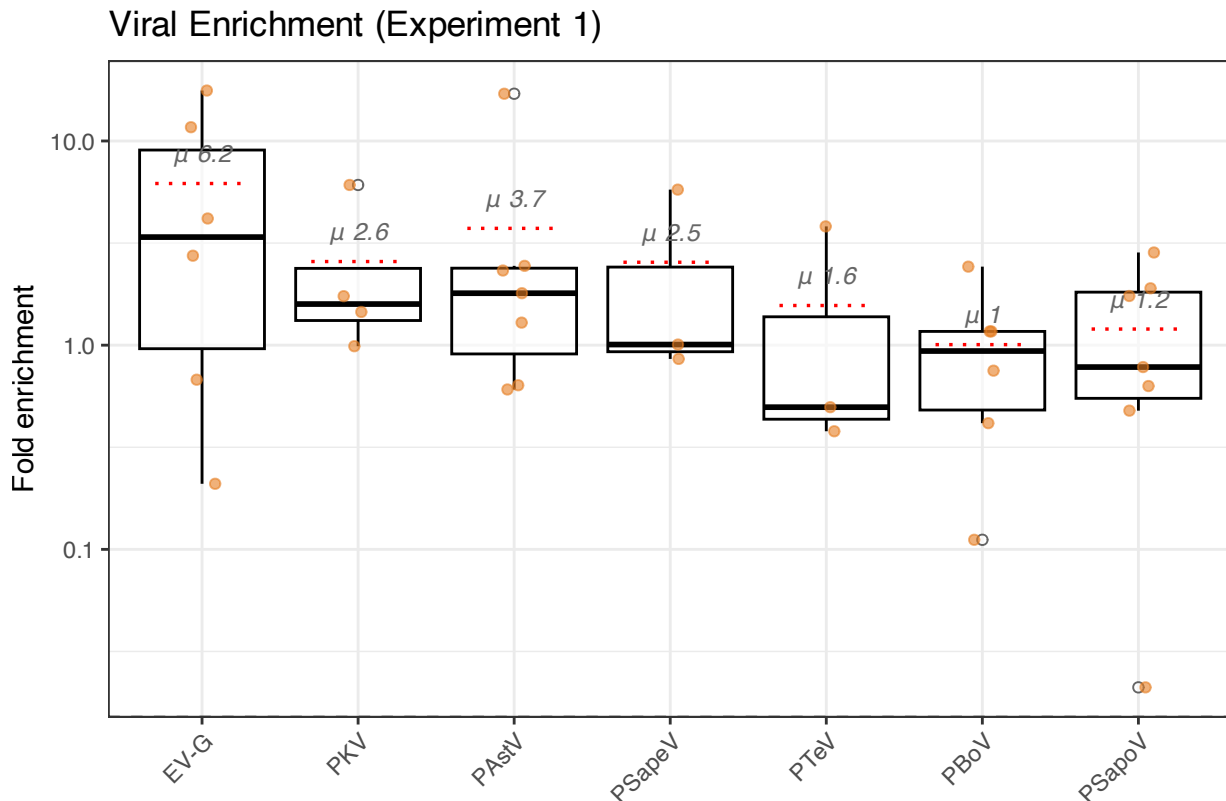

Combined Enrichment Plot

```
# Combine data from both experiments for unified visualization
combined_targets <- bind_rows(
  only_viral_targets %>% mutate(experiment_group = "Targeted Enrichment"),
  only_viral_targets_exp1 %>% mutate(experiment_group = "Off-Target Enrichment")
) %>%
  filter(!name_group %in% c("HPV18", "PCV"))

# Create combined boxplot with faceting
combined_enrichment_plot <- ggplot(combined_targets, aes(x = name_group, y = rpm_enrichment, fill = experiment_group)) +
  geom_boxplot(width = 0.7, outlier.shape = 21, outlier.fill = "white", alpha = 0.7, position = position_jitterdodge()) +
  scale_y_log10() +
  geom_point(aes(color = experiment_group),
    position = position_jitterdodge(jitter.width = 0.15, dodge.width = 0.8),
    alpha = 0.6, size = 1.5) +
  scale_fill_manual(values = c("Targeted Enrichment" = "#3C8DBC", "Off-Target Enrichment" = "#E67E22"))
```


```

scale_color_manual(values = c("Targeted Enrichment" = "#3C8DBC", "Off-Target Enrichment" = "#E67E22"))
geom_hline(yintercept = 0, linetype = "dashed", color = "gray50") +
labs(
  title = "",
  x = "",
  y = "Fold enrichment (log10)",
  fill = "Dataset",
  color = "Dataset"
) +
theme_bw() +
theme(
  #axis.text.x = element_text(angle = 45, hjust = 1),
  legend.position = "top",
  legend.title = element_blank()
)

```

combined_enrichment_plot

Warning in scale_y_log10(): log-10 transformation introduced infinite values.

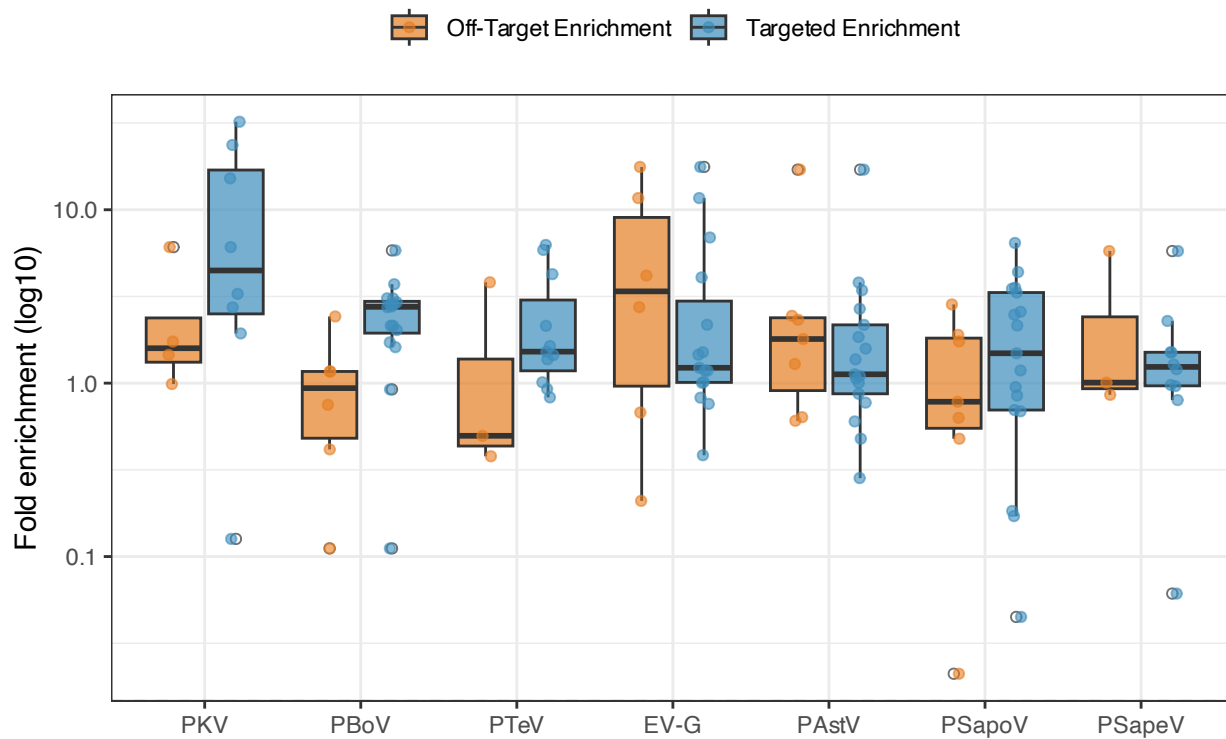

Final rPM Enrichment Tables for Manuscript

```
cat("\\captionsetup[labelformat=empty]")
```

```

# final table for each viral target
viral_target_enrichment_summary = only_viral_targets %>%
  group_by(name_group) %>%
  summarise(
    rpm_ngs = round(mean(NGS, na.rm = TRUE), 2), # mean

```



```

rpm_msspe = round(mean(MSSPE, na.rm = TRUE),2), #mean
median_enrichment = round(median(rpm_enrichment, na.rm = TRUE),2),
mean_enrichment = round(mean(rpm_enrichment, na.rm = TRUE),2),
log_fold_enrichment = round(mean(log2FC, na.rm = TRUE),2),
iqr = paste0(
  round(quantile(rpm_enrichment, 0.25, na.rm = TRUE), 1),
  "-",
  round(quantile(rpm_enrichment, 0.75, na.rm = TRUE), 1)
),
n_pairs = n(),
p_value = {
  # ensure both vectors are aligned and remove any NA pairs
  paired_data <- na.omit(data.frame(ngs = NGS, msspe = MSSPE))

  if(nrow(paired_data) > 1) {
    round(wilcox.test(paired_data$ngs,
                      paired_data$msspe,
                      alternative = "two.sided",
                      paired = TRUE)$p.value, 3)
  } else {
    NA_real_
  }
},
effect_r = {
  paired_data <- na.omit(data.frame(ngs = NGS, msspe = MSSPE))
  if(nrow(paired_data) > 1) {
    long_df <- paired_data %>%
      pivot_longer(cols = c(ngs, msspe), names_to = "prep", values_to = "value") %>%
      mutate(prepare = factor(prepare, levels = c("ngs", "msspe")))
    round(wilcox_effsize(long_df, value ~ prepare, paired = TRUE)$effsize, 3)
  } else NA_real_
}
) %>%
arrange(desc(median_enrichment))

# Make table pretty
viral_target_table <- viral_target_enrichment_summary %>%
  rename(
    "Virus" = name_group,
    "rPM (NGS)" = rpm_ngs,
    "rPM (MSSPE)" = rpm_msspe,
    "Median Fold Change" = median_enrichment,
    "Mean Fold Change" = mean_enrichment,
    "IQR" = iqr,
    "p-value" = p_value,
    "effect size (r)" = effect_r
  ) %>%
  select(-n_pairs, -log_fold_enrichment) %>%
  kable(
    format = "latex",
    booktabs = TRUE,
    caption = "Enrichment across all paired samples per viral target",

```

```

    digits = 3,
    align = "lrrr", # adjust as needed: text left, numbers right
    format.args = list(big.mark = ",")
  ) %>%
  kable_styling(
    latex_options = c("striped", "hold_position"), # polished journal look
    position = "center",
    full_width = TRUE,
    font_size = 9
  ) %>%
  row_spec(0, bold = TRUE) %>% # strong header
  collapse_rows(columns = 1, latex_hline = "major") # if repeating target names
viral_target_table

```

Enrichment across all paired samples per viral target

Virus	rPM (NGS)	rPM (MSSPE)	Median Fold Change	Mean Fold Change	IQR	p-value	effect size (r)
PKV	49.86	136.85	4.68	10.64	2.5–17.3	0.023	0.792
HPV18	4.90	16.51	2.94	19.88	2.6–4.6	0.062	0.905
PCV	21.29	55.67	2.89	4.83	1.8–5.7	0.005	0.713
PBoV	197.96	460.66	2.76	2.53	1.9–3	0.000	0.840
PTeV	34.38	47.36	1.52	2.48	1.2–3.2	0.032	0.643
PSapoV	35.49	79.06	1.49	2.04	0.7–3.3	0.132	0.373
PSapeV	19.19	27.30	1.24	1.64	1–1.5	0.322	0.338
EV-G	77.92	228.82	1.23	3.54	1–3.1	0.015	0.616
PAstV	183.45	356.94	1.12	2.43	0.9–2.2	0.329	0.247

Proportion of samples with viral targets

```

count_target_viruses = all_viruses %>%
  filter(!str_detect(sample_name, "PC")) %>%
  group_by(sample_name, name_group) %>%
  filter(str_detect(name_group, regex(paste0("\\b(", paste(name_targets, collapse="|"), ")\\b"), ignore.case = TRUE)))
  summarize(count = sum(n(), na.rm=TRUE), .groups="drop")

virus_sample_per_targets = count_target_viruses %>%
  group_by(name_group) %>%
  summarize(
    perc_of_samples = n_distinct(sample_name) / n_distinct(.sample_name)
  ) %>%
  arrange(desc(perc_of_samples))

```

GENOME COVERAGE

```
cat("\\captionsetup{labelformat=empty}")
```

```

# Folder containing coverage CSVs
cov_dir <- "/Users/mattparker/Dropbox/Workspace/moops/manuscript1/data/experiment_all/coverage_tables"

# Read all CSV files
cov_files <- list.files(cov_dir, pattern = "\\..csv$", full.names = TRUE)

# Function to compute breadth and mean depth from one coverage file
calc_cov_stats <- function(file) {
  df <- read.csv(file)
  tibble(
    file = basename(file),
    virus = str_replace(file, "_s.*|_pc.*", ""),
    base_sample = str_remove(str_extract(basename(file), "(?<=)(s\\d+|pc\\d+)"), "_"),
    prep = ifelse(str_detect(file, "_m"), "MSSPE", "NGS"),
    sample_type = if_else(base_sample %in% pond_samples, "environmental", "slurry"),
    ref_length = nrow(df),
    breadth_1x = mean(df$Coverage > 0) * 100, # Percentage of genome covered at 1x depth
    mean_depth = mean(df$Coverage) # Mean coverage depth across genome
  )
}

# Calculate coverage for all files
cov_summary <- map_dfr(cov_files, calc_cov_stats)

# Pivot wider for paired comparison
paired_tbl <- cov_summary %>%
  select(virus, base_sample, prep, breadth_1x, mean_depth) %>%
  pivot_wider(
    names_from = prep,
    values_from = c(breadth_1x, mean_depth),
    names_glue = "{.value}_{prep}"
  ) %>%
  mutate(
    enrichment_breadth = breadth_1x_MSSPE - breadth_1x_NGS, # Absolute percentage point increase
    enrichment_depth = mean_depth_MSSPE - mean_depth_NGS, # Absolute depth increase
    virus = recode(virus,
      `astrov` = "PAstV",
      `etvg` = "EV-G",
      `hpv18` = "HPV18",
      `pbov` = "PBoV",
      `pcv` = "PCV",
      `sapel` = "PSapeV",
      `tev` = "PTeV",
      `pkv` = "PKV",
    ),
    virus = fct_reorder(virus, enrichment_breadth, .fun = mean, .desc = TRUE)
  ) %>%
  arrange(desc(enrichment_breadth))

```

```

## Warning: There was 1 warning in `mutate()`.
## i In argument: `virus = fct_reorder(virus, enrichment_breadth, .fun = mean,
##   .desc = TRUE)` .
## Caused by warning:

```

```
## ! `fct_reorder()` removing 23 missing values.
## i Use `.na_rm = TRUE` to silence this message.
## i Use `.na_rm = FALSE` to preserve NAs.
```

```
# Summary table (1 row per metric)
wilcox_summary = paired_tbl %>%
  replace_na(list(breadth_1x_MSSPE = 0, breadth_1x_NGS = 0, enrichment_breadth = 0)) %>% # Some samples
  group_by(virus) %>%
  summarise(
    mean_ngs = round(mean(breadth_1x_NGS, na.rm = TRUE), 2),
    mean_msspe = round(mean(breadth_1x_MSSPE, na.rm = TRUE), 2),
    percent_enrichment = round(mean_msspe - mean_ngs, 2),
    iqr = paste0(
      round(quantile(breadth_1x_MSSPE - breadth_1x_NGS, 0.25, na.rm = TRUE), 1),
      "-",
      round(quantile(breadth_1x_MSSPE - breadth_1x_NGS, 0.75, na.rm = TRUE), 1)
    ),
    n_pairs = n(),
    p_value = if (n() > 1) {
      test <- wilcox.test(
        breadth_1x_MSSPE,
        breadth_1x_NGS,
        paired = TRUE,
        alternative = "two.sided",
        exact = FALSE
      )
      round(test$p.value, 3)
    } else {
      NA_real_
    },
    effect_r = {
      paired_data <- na.omit(data.frame(ngs = breadth_1x_NGS, msspe = breadth_1x_MSSPE))
      if(nrow(paired_data) > 1) {
        long_df <- paired_data %>%
          pivot_longer(cols = c(ngs, msspe), names_to = "prep", values_to = "value") %>%
          mutate(prepare = factor(prepare, levels = c("ngs", "msspe")))
        round(wilcox_effsize(long_df, value ~ prepare, paired = TRUE)$effsize, 3)
      } else NA_real_
    },
    .groups = "drop"
  )

# Make table pretty
wilcox_summary %>%
  mutate(
    virus = recode(virus,
      `astrov` = "PAstV",
      `etvg` = "EV-G",
      `hvp18` = "HPV18",
      `pbov` = "PBoV",
      `pcv` = "PCV",
      `sapel` = "PSapeV",
      `tev` = "PTeV",

```

Genome coverage enrichment across all paired samples per viral target

Virus	% coverage (NGS)	% coverage (MSSPE)	Enrichment (%)	IQR	p-value	Effect Size (r)
PCV	34.17	56.66	22.49	17.6–28.2	0.059	0.861
PBoV	56.90	74.51	17.61	0.4–29.8	0.006	0.719
PKV	11.44	20.60	9.16	2.3–9.4	0.019	0.757
PTeV	33.49	43.40	9.91	1.2–21.3	0.025	0.630
EV-G	40.96	48.62	7.66	-3.1–9.9	0.205	0.323
PSapeV	32.81	36.37	3.56	-3.8–3.3	0.616	0.143
PAstV	52.43	57.14	4.71	-7–11.1	0.663	0.108
HPV18	15.23	19.25	4.02	-4.6–13.2	0.584	0.365

```

    `pkv` = "PKV",
  )
) %>%
rename(
  "Virus" = virus,
  "% coverage (NGS)" = mean_ngs,
  "% coverage (MSSPE)" = mean_msspe,
  "Enrichment (%)" = percent_enrichment,
  "IQR" = iqr,
  "p-value" = p_value,
  "Effect Size (r)" = effect_r
) %>%
select(-n_pairs) %>%
kable(
  format = "latex", # or "latex" if using LaTeX
  caption = "Genome coverage enrichment across all paired samples per viral target",
  digits = 3,
  format.args = list(big.mark = ",")
) %>%
kable_styling(
  full_width = TRUE,
  position = "center",
)

```

```

# calculate mean so we can add to the boxplot
mean_cov_df <- paired_tbl %>%
  group_by(virus) %>%
  summarise(mean_value = mean(enrichment_breadth, na.rm = TRUE))

# Create the boxplot for each targeted virus
all_target_cov_plot = ggplot(paired_tbl, aes(x = virus, y = enrichment_breadth)) +
  geom_boxplot(width = 0.6, outlier.shape = 21, outlier.fill = "white", color = "black") +
  geom_jitter(width = 0.1, alpha = 0.6, size = 1.5, color = "#27AE60") + # Professional green
  geom_hline(yintercept = 0, linetype = "dashed") +
  geom_segment(
    data = mean_cov_df,
    aes(x = as.numeric(virus) - 0.3,
        xend = as.numeric(virus) + 0.3,
        y = mean_value, yend = mean_value),
  )

```

```

inherit.aes = FALSE,
linetype = "dashed", color = "black", linewidth = 0.6
) +
geom_text(data = mean_cov_df, aes(x = virus, y = mean_value, label = paste0(" ", round(mean_value, 1)
labs(
  x = "",
  y = "Increase in genome coverage (%)",
  title = "Genome Coverage Enrichment"
) +
theme_minimal(base_size = 14) +
theme(
  legend.position = "none",
  panel.grid.major.x = element_blank(),
  panel.grid.minor = element_blank()
)

all_target_cov_plot

```

```


## Warning: Removed 23 rows containing non-finite outside the scale range
## (`stat_boxplot()`).

```

```

## Warning: Removed 23 rows containing missing values or values outside the scale range
## (`geom_point()`).

```

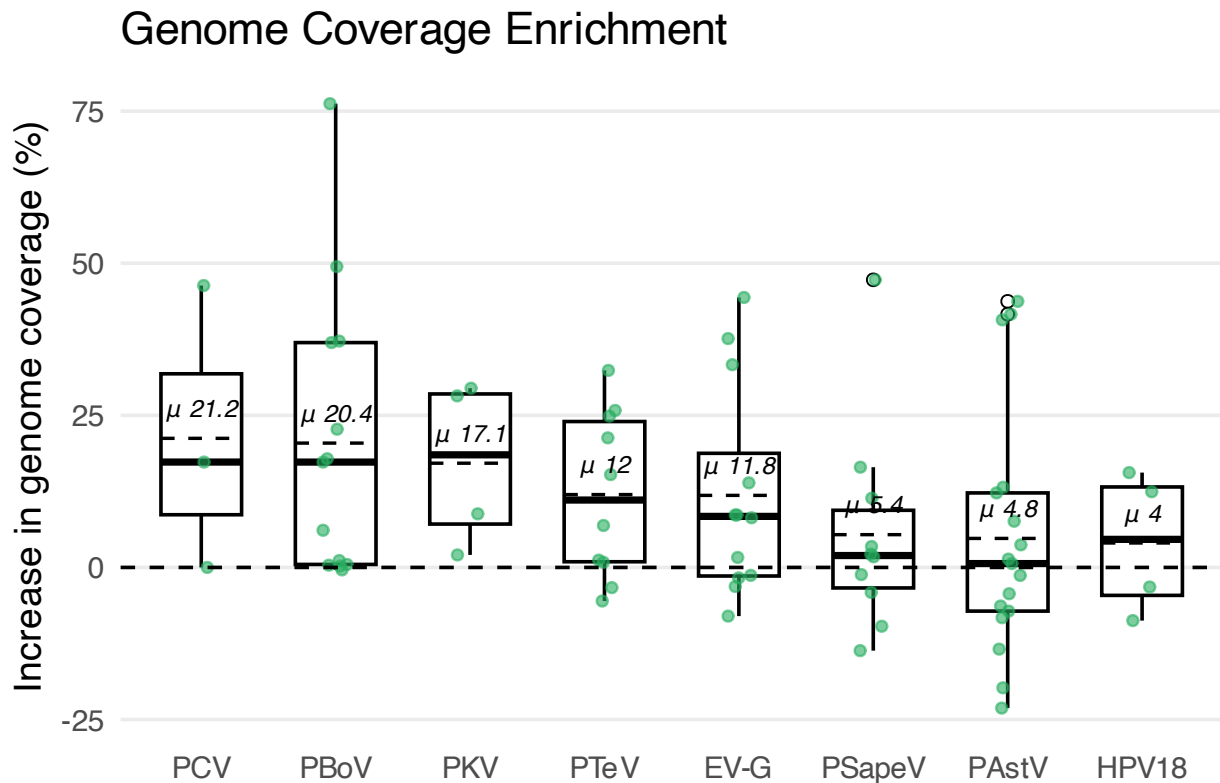

```

# Overall Enrichment (non-paired)

```

```

# All viruses & enrichment

```

```

overall_tbl = all_viruses %>%
  filter(str_detect(name_group, regex(paste0("\\b(", paste(name_targets, collapse="|"), "\\b"), ignore
  group_by(name_group, library_prep) %>%
  summarize(rpm_mean = sum(nt_rpm, na.rm = TRUE), .groups = "drop")

overall_tbl_summary = all_viruses %>%
  filter(str_detect(name_group, regex(paste0("\\b(", paste(name_targets, collapse="|"), "\\b"), ignore
  group_by(base_sample, name_group, library_prep) %>%
  summarize(rpm_mean = sum(nt_rpm, na.rm = TRUE), .groups = "drop") %>%
  pivot_wider(
    names_from = library_prep,
    values_from = rpm_mean
  ) %>%
  mutate(
    MSSPE = replace_na(MSSPE, 0.1), # Set NAs to 0 for non-detections
    NGS = replace_na(NGS, 0.1), # Set NAs to 0 for non-detections
    rpm_enrichment = (`MSSPE` + eps)/(`NGS` + eps),
    log2FC = log2(rpm_enrichment),
    name_group = fct_reorder(name_group, log2FC, .fun = mean, .desc = TRUE)
  ) %>%
  arrange(desc(log2FC))

# Calculate average enrichment overall
median(overall_tbl_summary$log2FC)

## [1] 0.8947968

round(quantile(overall_tbl_summary$log2FC, 0.25, na.rm = TRUE), 2)

## 25%
## 0.02

round(quantile(overall_tbl_summary$log2FC, 0.75, na.rm = TRUE), 2)

## 75%
## 1.78

# median enrichment overall
median(overall_tbl_summary$rpm_enrichment)

## [1] 1.859348

# mean
mean(overall_tbl_summary$rpm_enrichment)

## [1] 4.116704

# IQR
round(quantile(overall_tbl_summary$rpm_enrichment, 0.25, na.rm = TRUE), 2)

```

```
## 25%
## 1.01
```

```
round(quantile(overall_tbl_summary$rpm_enrichment, 0.75, na.rm = TRUE), 2)
```

```
## 75%
## 3.44
```

```
# Paired Wilcoxon test across all samples
```


```
wilcox_res <- wilcox.test(
  overall_tbl_summary$NGS,
  overall_tbl_summary$MSSPE,
  paired = TRUE,
  alternative = "two.sided"
)
```

```
pval <- wilcox_res$p.value
```

```
log2fc_plot = ggplot(overall_tbl_summary, aes(x = "", y = rpm_enrichment)) +
  geom_boxplot(width = 0.4, fill = "gray90", color = "black", outlier.shape = 21, outlier.fill = "white",
    scale_y_log10() +
  geom_jitter(width = 0.1, alpha = 0.6, size = 1.5, color = "#3C8DBC") +
  geom_hline(yintercept = 0, linetype = "dashed", color = "gray50") +
  annotate("text", x = 1, y = max(overall_tbl_summary$rpm_enrichment, na.rm = TRUE) * 1.1,
    label = paste0("Wilcoxon p = ", signif(pval, 3)),
    fontface = "italic", size = 4) +
  labs(
    x = "",
    y = "Fold enrichment (log10)",
    title = "a"
  ) +
  theme_minimal(base_size = 14) +
  theme(
    panel.grid.major.x = element_blank(),
    legend.position = "none",
  )
```

```
log2fc_plot
```

```
## Warning in scale_y_log10(): log-10 transformation introduced infinite values.
```
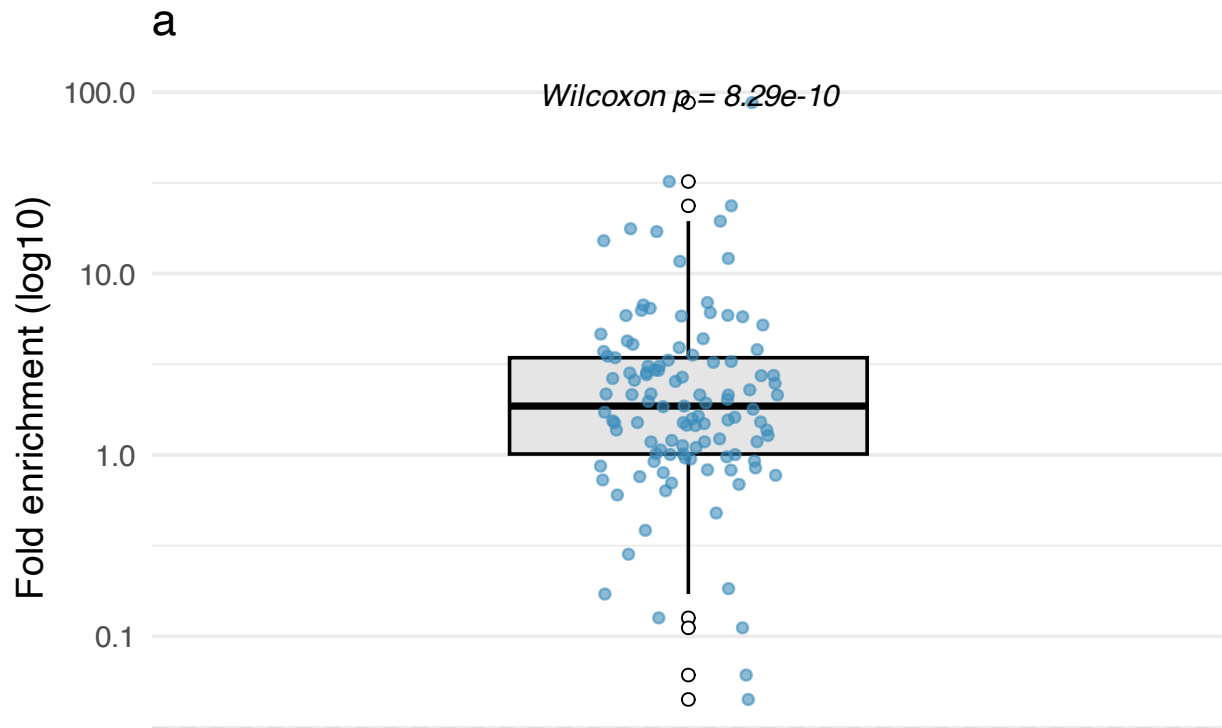
```
# get overall genome coverage enrichment - use wilcox_summary table which includes NA as a non detection
overall_cov_tbl = wilcox_summary %>%
  group_by(virus) %>%
  summarize(cov_change_mean = mean(percent_enrichment), .groups = "drop") # change to depth if you want

mean(overall_cov_tbl$cov_change_mean)
```

```
## [1] 9.89
```

```
round(quantile(overall_cov_tbl$cov_change_mean, 0.25, na.rm = TRUE), 2)
```

```
## 25%
## 4.54
```

```
round(quantile(overall_cov_tbl$cov_change_mean, 0.75, na.rm = TRUE), 2)
```

```
## 75%
## 11.84
```

```
# Is the different in coverage values significant?
wilcox.test(
  paired_tbl$breadth_1x_NGS,
  paired_tbl$breadth_1x_MSSPE,
  paired = TRUE,
  alternative = "two.sided"
)
```

```
##
## Wilcoxon signed rank test with continuity correction
##
## data: paired_tbl$breadth_1x_NGS and paired_tbl$breadth_1x_MSSPE
## V = 563, p-value = 2.536e-05
## alternative hypothesis: true location shift is not equal to 0

# Paired Wilcoxon test across all samples
wilcox_res_cov <- wilcox.test(
  paired_tbl$breadth_1x_NGS,
  paired_tbl$breadth_1x_MSSPE,
  paired = TRUE,
  alternative = "two.sided"
)

pval_cov <- wilcox_res_cov$p.value


# summarize for boxplot
overall_cov_tbl_2 = cov_summary %>%
  group_by(virus, prep) %>%
  summarize(cov_change_mean = mean(breadth_1x, na.rm = TRUE), .groups = "drop")

# Boxplot of mean_nt_rpm by library_prep
cov_plot = ggplot(paired_tbl, aes(x = "", y = enrichment_breadth)) +
  geom_boxplot(width = 0.4, fill = "gray90", color = "black", outlier.shape = 21, outlier.fill = "white") +
  geom_jitter(width = 0.1, alpha = 0.6, size = 1.5, color = "#27AE60") +
  #scale_color_viridis(option = "viridis", direction = -1) +
  geom_hline(yintercept = 0, linetype = "dashed", color = "gray50") +
  annotate("text", x = 1, y = max(paired_tbl$enrichment_breadth, na.rm = TRUE) * 1.1,
    label = paste0("Wilcoxon p = ", signif(pval_cov, 3)),
    fontface = "italic", size = 4) +
  labs(
    x = "",
    y = "Genome coverage enrichment (%)",
    title = "b"
  ) +
  theme_minimal(base_size = 14) +
  theme(
    panel.grid.major.x = element_blank(),
    legend.position = "none",
  )

cov_plot

## Warning: Removed 23 rows containing non-finite outside the scale range
## (`stat_boxplot()`).

## Warning: Removed 23 rows containing missing values or values outside the scale range
## (`geom_point()`).
```

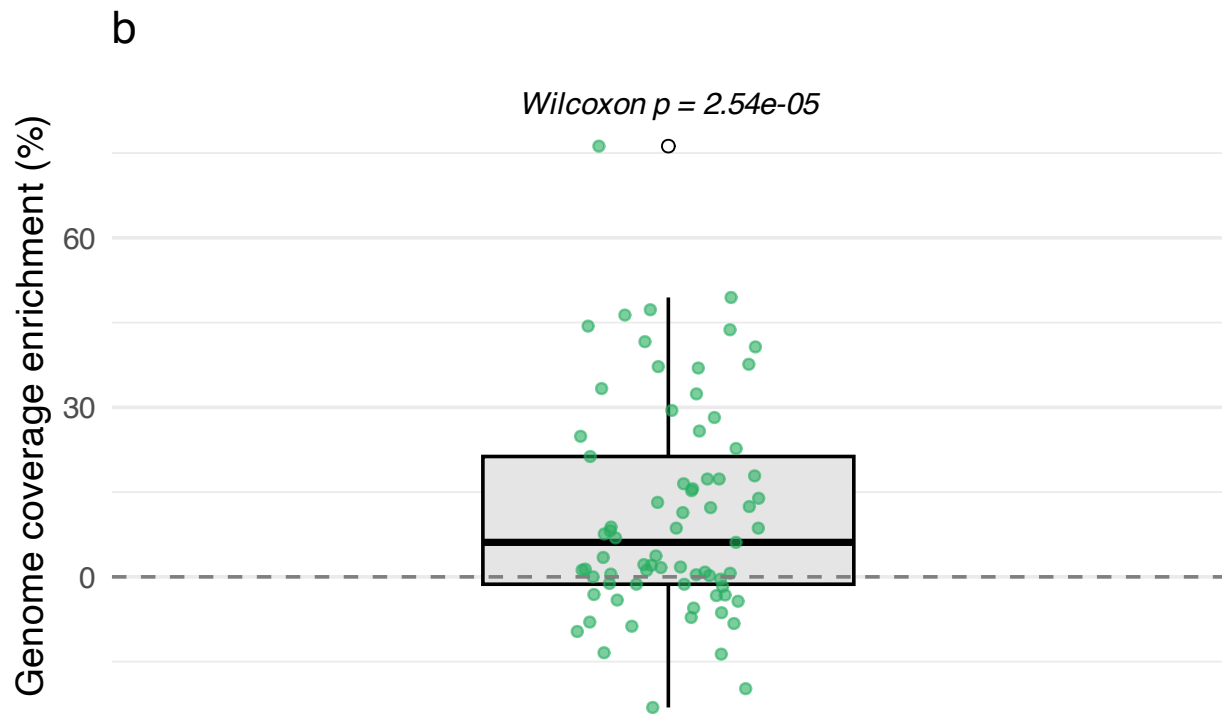

```
horizontal_space <- plot_spacer() + plot_layout(widths = c(0.05))
```


```
combined_boxplots = (log2fc_plot | horizontal_space | cov_plot) +  
  plot_layout(ncol = 3, widths = c(1.5, 0.5, 1.5))
```

```
combined_boxplots
```

```
## Warning in scale_y_log10(): log-10 transformation introduced infinite values.
```

```
## Warning: Removed 23 rows containing non-finite outside the scale range  
## (`stat_boxplot()`).
```

```
## Warning: Removed 23 rows containing missing values or values outside the scale range  
## (`geom_point()`).
```

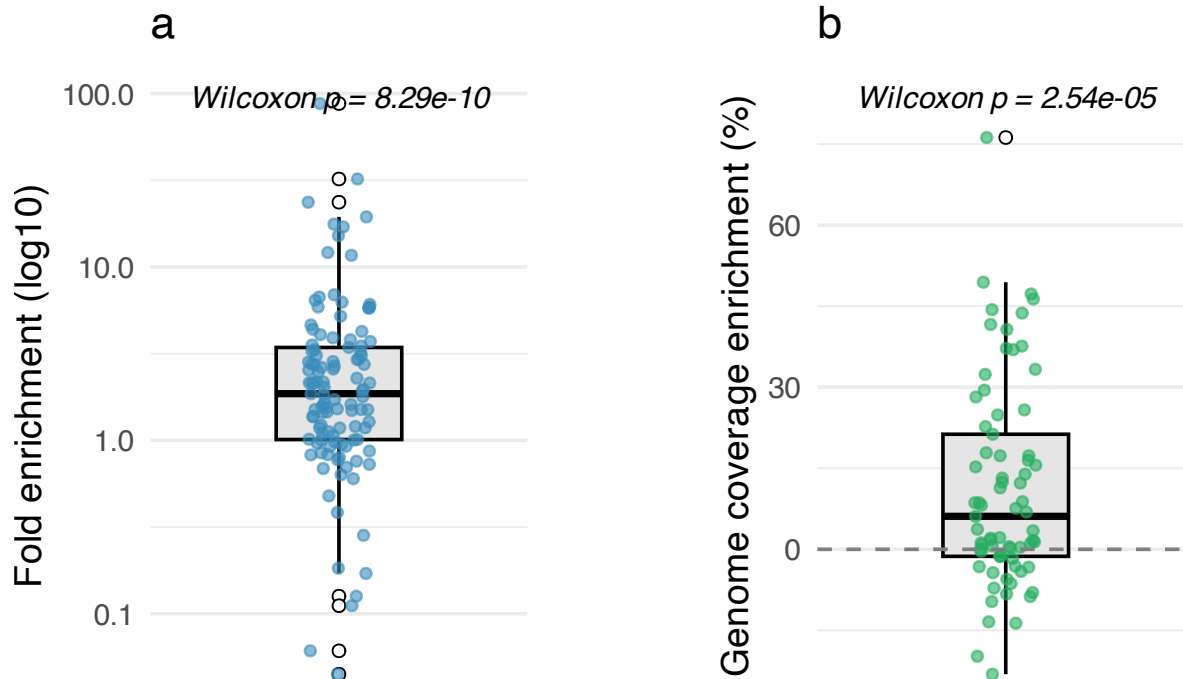

Comparing Likelihood of detecting targets by Lib Prep or Sample Type

```
library(purrr)

# filter to targets
filter2targets = all_viruses %>%
  filter(str_detect(name_group, regex(paste0("\\b(", paste(name_targets, collapse="|"), ")\\b"), ignore

# get tables to create matrix
all_targets = unique(filter2targets$name_group)
all_samples = unique(filter2targets$sample_name)
all_preps = unique(filter2targets$library_prep)
all_types = unique(filter2targets$sample_type)

# create library prep matrix + detected column
expanded <- expand_grid(
  sample_name = all_samples,
  library_prep = all_preps,
  name_group = all_targets
) %>%
  left_join(filter2targets %>% mutate(detected = 1),
    by = c("sample_name", "library_prep", "name_group")) %>%
  mutate(detected = ifelse(is.na(detected), 0, detected))

# do mcnemars test
results_libprep <- expanded %>%
  group_by(name_group, sample_name) %>%
  summarise(
    NGS = detected[library_prep == "NGS"],
    MSSPE = detected[library_prep == "MSSPE"],
    .groups = "drop"
```

```

) %>%
group_by(name_group) %>%
summarise(
  mcnemar = list(mcnemar.test(table(NGS, MSSPE))),
  p_value = mcnemar[[1]]$p.value,
  # Compute discordant counts
  b = sum(NGS == 0 & MSSPE == 1), # detected by MSSPE only
  c = sum(NGS == 1 & MSSPE == 0), # detected by NGS only

  # Odds ratio (b/c)
  odds_ratio = ifelse(c == 0, NA, b / c),
  log_or = log(odds_ratio),
  se_log_or = sqrt(1 / b + 1 / c),
  ci_lower = exp(log_or - 1.96 * se_log_or),
  ci_upper = exp(log_or + 1.96 * se_log_or),
  .groups = "drop"
)

```

```

## Warning: Returning more (or less) than 1 row per `summarise()` group was deprecated in
## dplyr 1.1.0.
## i Please use `reframe()` instead.
## i When switching from `summarise()` to `reframe()`, remember that `reframe()`
## always returns an ungrouped data frame and adjust accordingly.
## Call `lifecycle::last_lifecycle_warnings()` to see where this warning was
## generated.

```

```
results_libprep
```

```

## # A tibble: 9 x 10
##   name_group mcnemar p_value      b      c odds_ratio log_or se_log_or ci_lower
##   <chr>      <list>   <dbl> <int> <int>      <dbl> <dbl>      <dbl>   <dbl>
## 1 EV-G      <htest>  0.310    21    14        1.5  0.405      0.345   0.763
## 2 HPV18     <htest>    1     10     9        1.11 0.105      0.459   0.451
## 3 PAsTV     <htest>  0.132   108    86        1.26 0.228      0.145   0.946
## 4 PBoV     <htest>  0.0286   62    39        1.59 0.464      0.204   1.07
## 5 PCV      <htest>  0.281    19    12        1.58 0.460      0.369   0.769
## 6 PKV      <htest>  0.181    10     4        2.5  0.916      0.592   0.784
## 7 PSapeV    <htest>    1     17    16        1.06 0.0606     0.348   0.537
## 8 PSapoV    <htest>  0.560    26    21        1.24 0.214      0.293   0.697
## 9 PTeV     <htest>  0.389    37    29        1.28 0.244      0.248   0.785
## # i 1 more variable: ci_upper <dbl>

```

Overall Odds Ratio

```

# Sum discordant counts across all viruses
overall_b <- sum(results_libprep$b, na.rm = TRUE) # MSSPE only
overall_c <- sum(results_libprep$c, na.rm = TRUE) # NGS only

# Construct 2x2 table for McNemar
overall_tbl <- matrix(
  c(NA, overall_b, overall_c, NA), # we only need discordant counts for OR/p
  nrow = 2,

```

```

byrow = TRUE,
dimnames = list(NGS = c("0", "1"), MSSPE = c("0", "1"))
)

# Run McNemar test
# Note: mcnemar.test expects all 4 cells; can set concordant counts to 0
overall_tbl[1,1] <- 0 # neither detected
overall_tbl[2,2] <- 0 # both detected

overall_test <- mcnemar.test(overall_tbl)

# Overall odds ratio
overall_or <- ifelse(overall_c > 0, overall_b / overall_c, NA)
log_or <- log(overall_or)
se_log_or <- sqrt(1/overall_b + 1/overall_c)
ci_lower <- exp(log_or - 1.96 * se_log_or)
ci_upper <- exp(log_or + 1.96 * se_log_or)

overall_results <- tibble(
  odds_ratio = overall_or,
  log_or = log_or,
  se_log_or = se_log_or,
  ci_lower = ci_lower,
  ci_upper = ci_upper,
  p_value = overall_test$p.value
)

overall_results

```

```

## # A tibble: 1 x 6
##   odds_ratio log_or se_log_or ci_lower ci_upper p_value
##   <dbl>   <dbl>   <dbl>   <dbl>   <dbl>   <dbl>
## 1     1.35 0.298     0.0870     1.14     1.60 0.000675

```

Genus Odds Ratios

Sanity checking raw rPM values for targeted viruses

```

sanity_tbl = all_viruses %>%
  group_by(base_sample, library_prep, name_group, experiment) %>%
  filter(str_detect(name_group, regex(paste0("\\b(", paste(name_targets, collapse="|"), ")\\b"), ignore
  summarize(rpm_sum = sum(nt_rpm, na.rm=TRUE), .groups="drop") %>%
  # Create column names combining experiment and library prep
  mutate(exp_lib = paste0("exp", experiment, "_", tolower(library_prep))) %>%
  # Group by name_group and pivot wider
  group_by(name_group, exp_lib) %>%
  summarize(nt_rpm = sum(rpm_sum, na.rm = TRUE), .groups = "drop") %>%
  pivot_wider(
    names_from = exp_lib,
    values_from = nt_rpm,
    values_fill = 0 # Fill missing values with 0
  ) %>%
  # Reorder columns to have name_group first, then exp1_msspe, exp1_ngs, exp2_msspe, etc.
  select(name_group, sort(tidyselect::peek_vars()[-1]))

```

EXPORT ALL FIGURES AND TABLES FTW