

PROGRAM 1:

Design a website of Santhigiri College the home page should contain links to course page,application form page(Use html, hyperlinks,lists,marquee,images ,form controls)

PROGRAM 2:

Write a javascript program to perform arithmetic operations.

```

<html>

<head>

<h2>Arithmetic Operations</h2>

<script>
function add()
{
var num1,num2,sum,dif,mul,div,mod;
num1=Number(document.getElementById("first").value);
num2=Number(document.getElementById("second").value);
sum=num1+num2;
dif=num1-num2;
mul=num1*num2;
div=num1/num2;
mod=num1%num2;
document.getElementById("answer1").value=sum;
document.getElementById("answer2").value=dif;
document.getElementById("answer3").value=mul;
document.getElementById("answer4").value=div;
document.getElementById("answer5").value=mod;
}
</script>

</head>

<body>

<p>Enter the first number:<input id="first"></p>

<td><p>Enter the second number:<input id="second"></p>

<button onclick="add()">submit</button>

```

```

<p>sum = <input id="answer1"></p>
<p>dif=<input id="answer2"></p>
<p>mul=<input id="answer3"></p>
<p>div=<input id="answer4"></p>
<p>mod=<input id="answer5"></p>
</body>
</html>

```

OUTPUT:

The screenshot shows a web browser window with the address bar displaying 'Z:\aldrin php new\arithmetic operations 2.html'. The page title is 'Arithmetic Operations'. The form contains the following elements:

- Input field for the first number: 3
- Input field for the second number: 7
- Submit button
- Output for sum: 10
- Output for difference (dif): -4
- Output for multiplication (mul): 21
- Output for division (div): 0.42857142857142854
- Output for modulus (mod): 3

PROGRAM 3:

Write a javascript program to check the given number is odd or even.

```
<html>
```

```
<head>

<script type="text/javascript">

var num;

function display()
{
num=Number(document.getElementById("num").value);
if(num%2==0)
{
document.write("given number is even");
}
else
{
document.write("given number is odd");
}
}

</script>

</head>

<body>

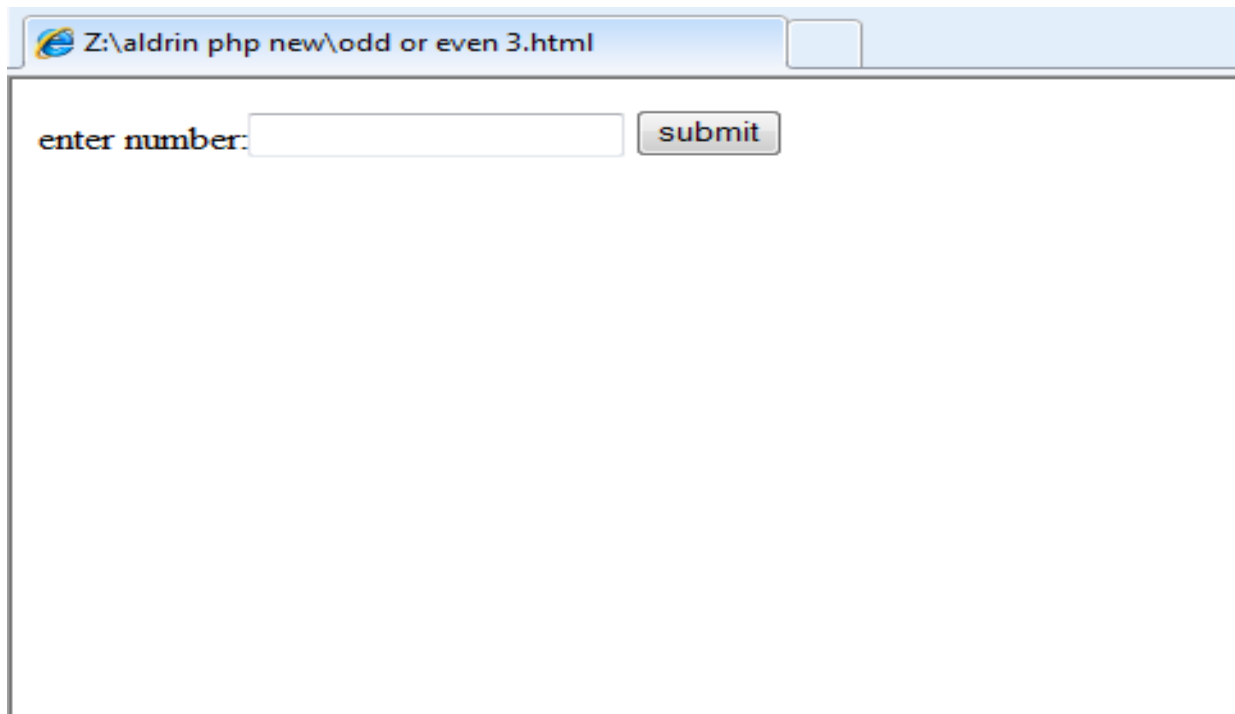
enter number:<input type="text" id="num">

<input type="button" onclick="display()" value="submit">

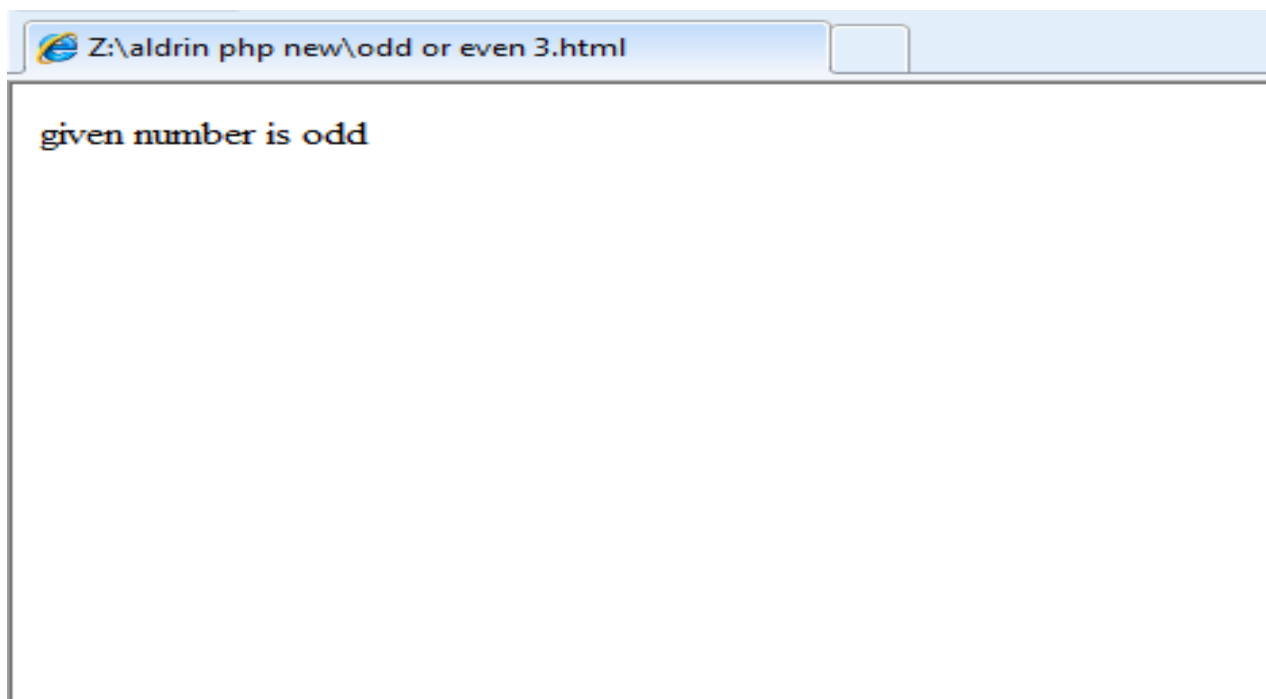
</body>

</html>
```

OUTPUT:



The screenshot shows a web browser window with the address bar displaying "Z:\aldrin php new\odd or even 3.html". The main content area contains a form with the text "enter number:" followed by a text input field and a "submit" button.



The screenshot shows the same web browser window after the form has been submitted. The text "given number is odd" is displayed in the main content area.

PROGRAM 4:

Write a javascript program to display a day using Switch case.

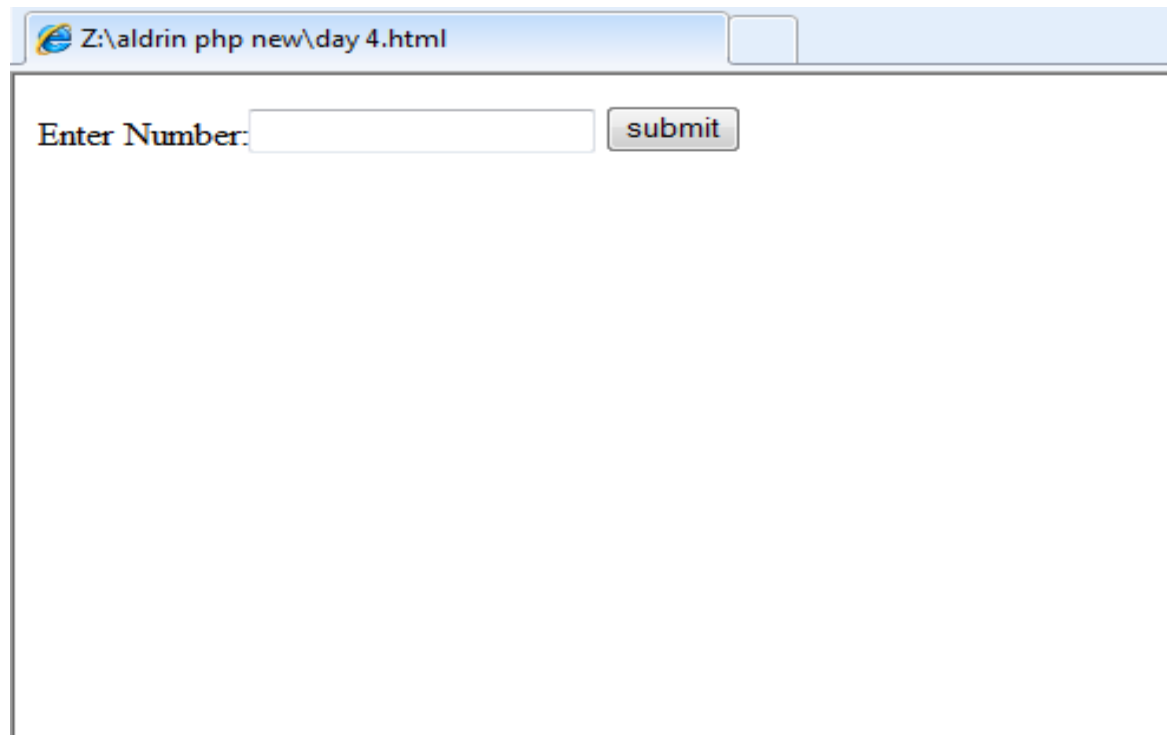
<html>

```
<head>
<script type="text/javascript">
function display()
{
var num=Number(document.getElementById("num").value);
switch(num)
{
case 1:document.write("sunday");
        break;
case 2:document.write("monday");
        break;
case 3:document.write("tuesday");
        break;
case 4:document.write("wednesday");
        break;
case 5:document.write("thursday");
        break;
case 6:document.write("friday");
        break;
case 7:document.write("saturday");
        break;
default:document.write("invalid input");
        break;
}
}
</script>
</head>
<body>
Enter Number:<input type="text" id="num">
```

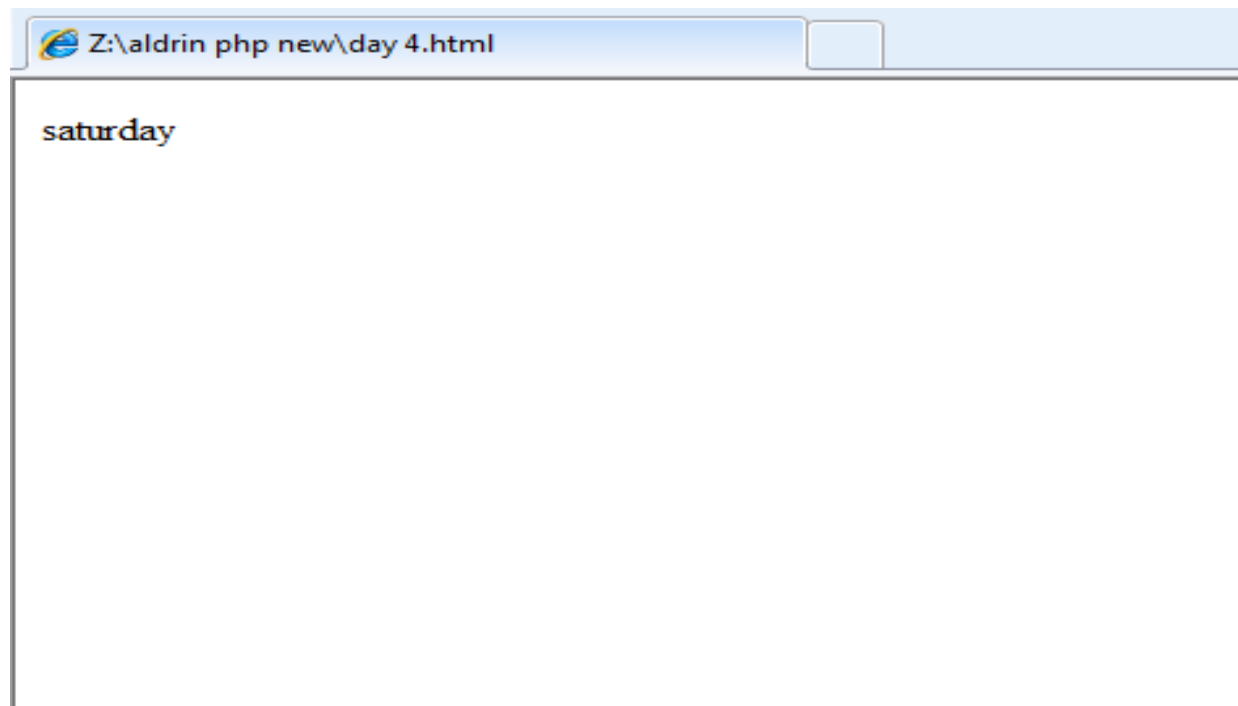
```
<input type="button" onclick="display()" value="submit">
```

```
</body>
```

```
</html>
```

OUTPUT:

The screenshot shows a web browser window with the address bar displaying "Z:\aldrin php new\day 4.html". The main content area of the browser contains the text "Enter Number:" followed by a text input field and a "submit" button.



The screenshot shows the same web browser window after the "submit" button has been clicked. The text "saturday" is now displayed in the main content area of the browser.

PROGRAM 5:

Write a javascript program to find the sum of n Natural numbers.

```
<html>
<head>
<script type="text/javascript">
function sum()
{
var n,i,sum=0;
n=Number(document.getElementById("first").value);
for(i=1;i<=n;i++)
sum=sum+i;
document.write("sum=" +sum);
}
</script>
</head>
<input type="text" id="first" placeholder="Enter limit">
<button onclick="sum()">submit</button>
</body>
</html>
```

OUTPUT:

 Z:\aldrin php new\sum of n 5.html

 Z:\aldrin php new\sum of n 5.html

sum=55

PROGRAM 6:

Write a javascript program to find the factorial of a given number.

```
<html>
<head>
<script type="text/javascript">
var n,i,f=1;
function fact()
{
n=Number(document.getElementById("num").value);
for(i=1;i<=n;i++)
{
f=f*i;
}
document.write("Factorial=" +f);
}
</script>
</head>
<body>
enter Number:<input type="text" placeholder="Enter the Number" id="num">
<input type="button" onclick="fact()" value="submit">
</body>
</html>
```

OUTPUT:

 Z:\aldrin php new\factorial 6.html

enter Number:

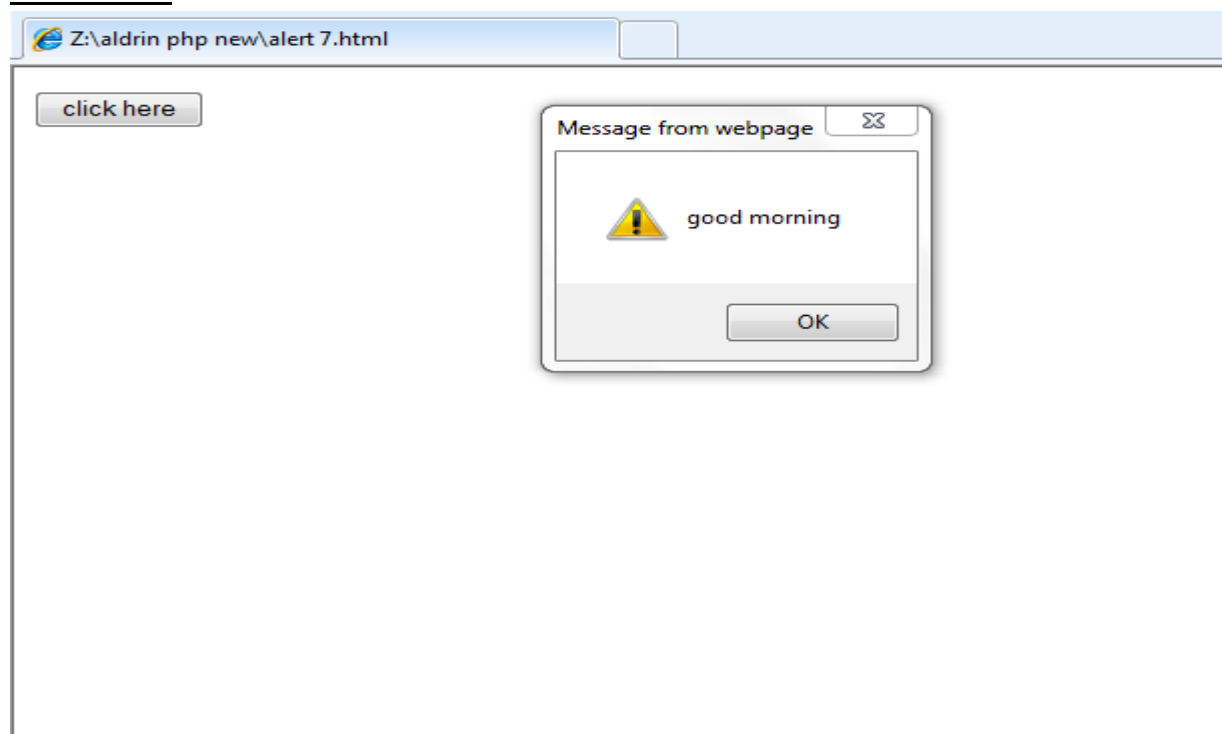
 Z:\aldrin php new\factorial 6.html

Factorial=120

PROGRAM 7:

Write a javascript program to print a message using alert box.

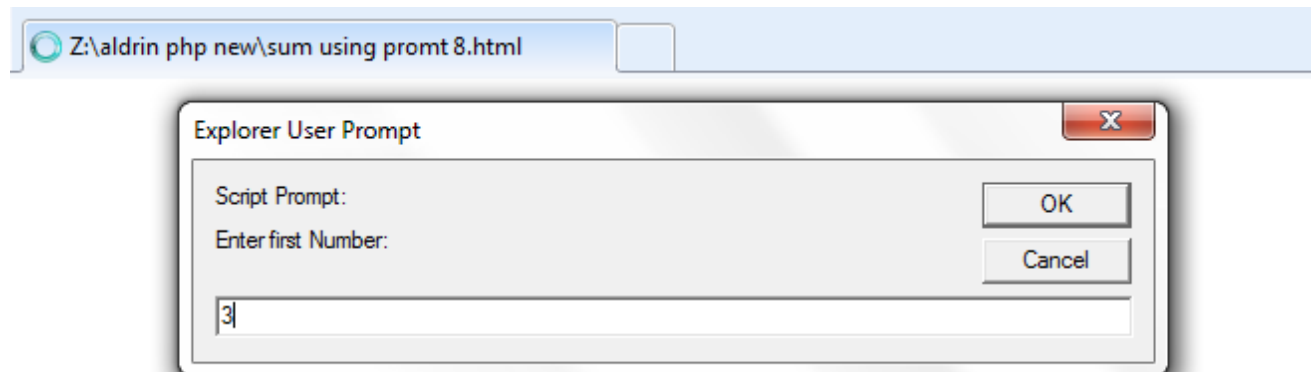
```
<html>
<body>
<script type="text/javascript">
function sayHello()
{
alert("good morning");
}
</script>
</head>
<body>
<input type="button" onclick="sayHello()" value="click here">
</body>
</html>
```


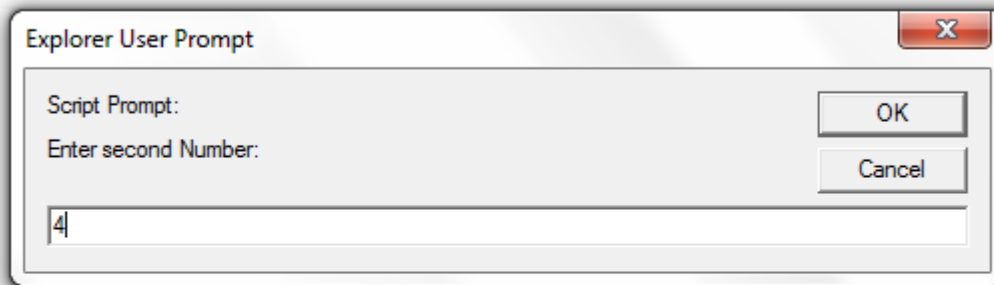
OUTPUT:

PROGRAM 8:

Write a javascript program to find the sum of two numbers using prompt box.

```
<html>
<head>
<script type="text/javascript">
var num1=Number(prompt("Enter first Number:"));
var num2=Number(prompt("Enter second Number:"));
var sum=num1+num2;
document.write("sum="+sum);
</script>
</head>
</html>
```

OUTPUT:



sum=7

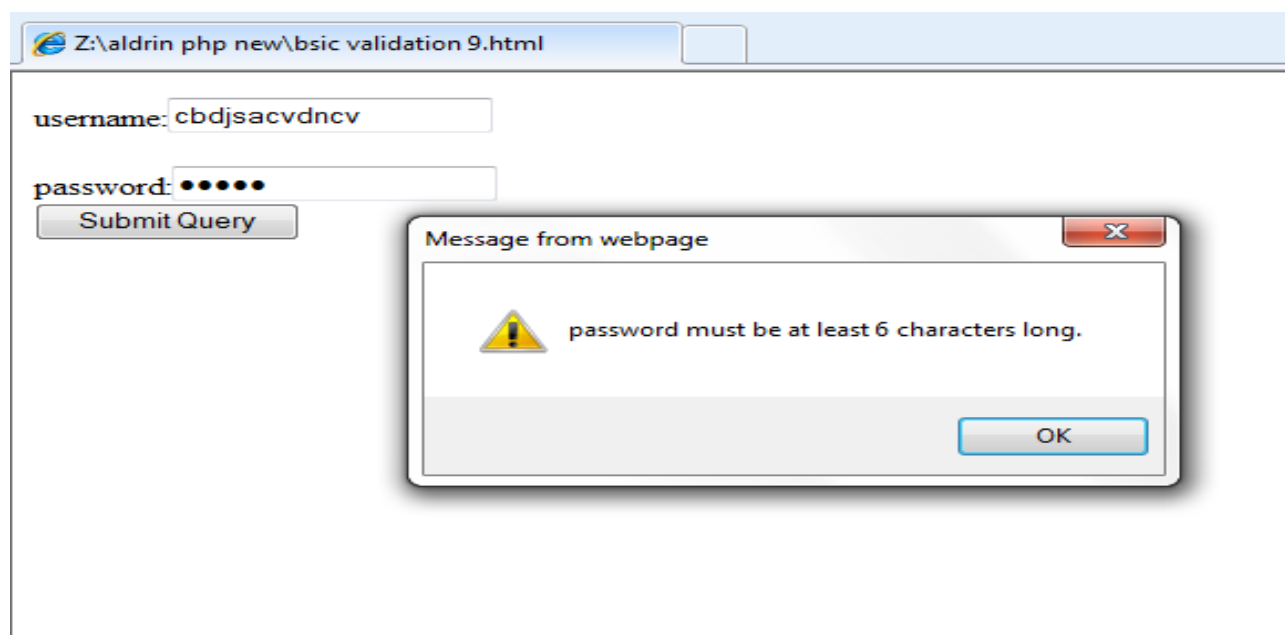
PROGRAM 9:

Write a program to perform basic form validation using javascript.

```
<html>
<head>
<script>
function validateform()
{
var name=document.myform.name.value;
var password=document.myform.password.value;

if(name=="")
{
alert("username cant be blank");
return false;
}
else if(password.length<6)
{
alert("password must be at least 6 characters long.");
return false;
}
}
</script>
</head>
<body>
<form name="myform" onsubmit="validateform()">
username:<input type="text" name="name">
<br>
<br>
```

```
password:<input type="password" name="password"><br>
<input type="submit" value="register">
</form>
</body>
</html>
```

OUTPUT:

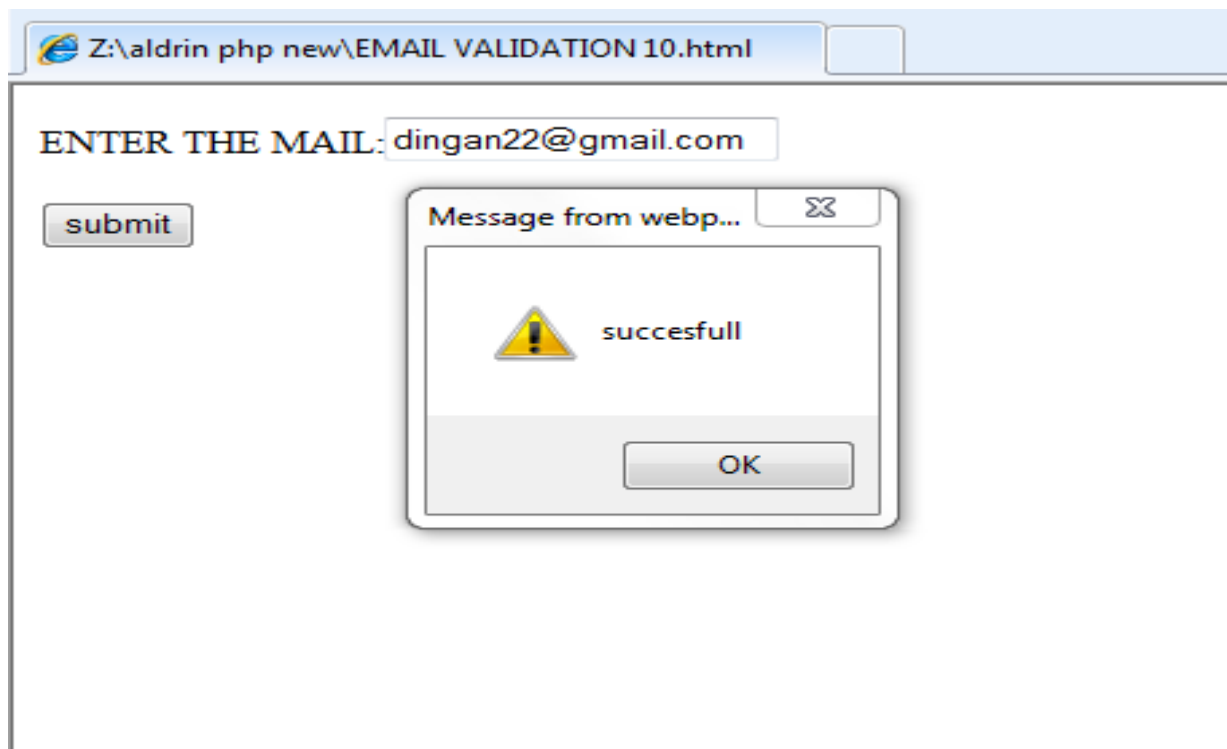
 Z:\aldrin php new\bsic validation 9.htmlusername: password:

PROGRAM 10:**Write a program to perform basic form validation using javascript**

```

<html>
<head>
<script>
function validateform()
{
var email=document.myform.email.value;
atpos=email.indexOf("@");
dotpos=email.lastIndexOf(".");
if(atpos<1 || (dotpos-atpos<2))
{
alert("please enter valid email id")
return false
}
alert("succesfull")
return(true);
}
</script>
<body>
<form name ="myform" onsubmit="validateform()">
ENTER THE MAIL:<input type ="text" name="email"><br>
<br>
<input type="submit" value="submit">
</form>
</body>
</html>

```

OUTPUT:

PROGRAM 11:

Write a PHP program to perform all arithmetic operations.

```
<html>

<body>

<?php

$x=30;

$y=20;

$result=$x+$y;

echo "sum = $result <br>";

$result=$x*$y;

echo "product = $result <br>";

$result=$x-$y;

echo "difference = $result <br>";

$result=$x/$y;

echo "division = $result <br> ";

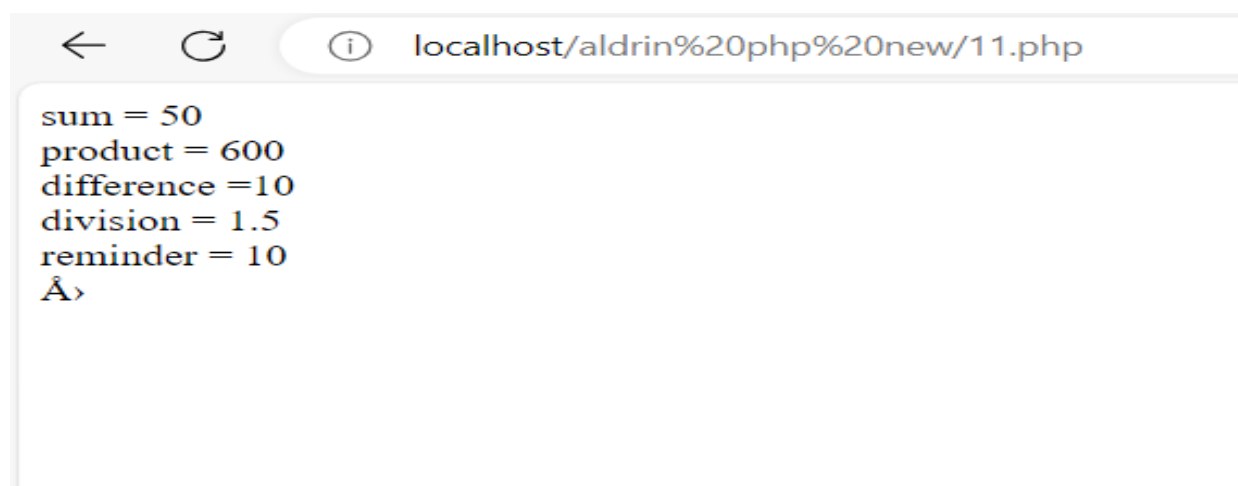
$result=$x%$y;

echo "reminder = $result <br>";

?>

</body>

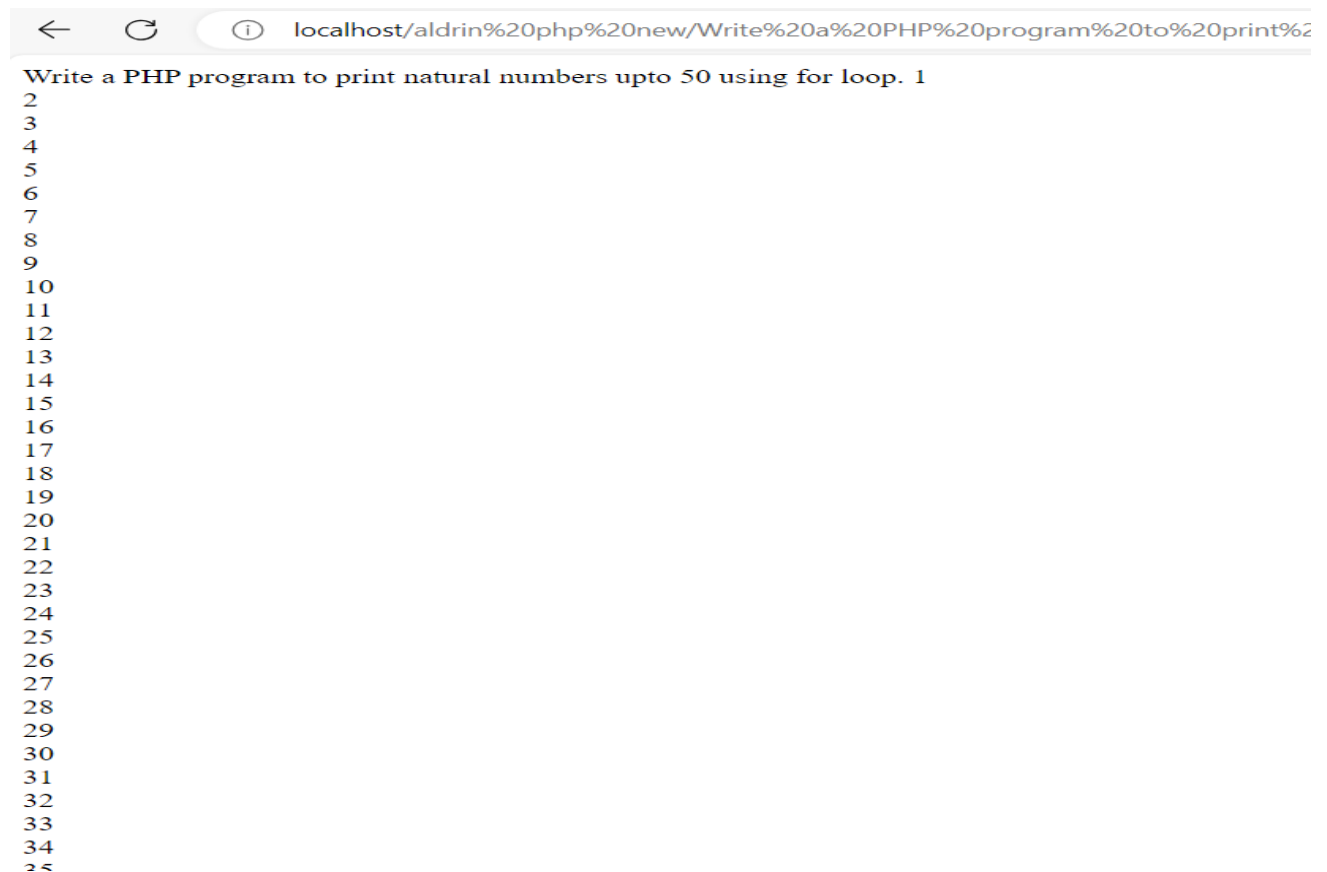
</html>
```

OUTPUT:

PROGRAM 12:

Write a PHP program to print natural numbers upto 50 using for loop.

```
<?php
for($x=1;$x<=50;$x++)
{
echo "$x <br>";
}
?>
```

OUTPUT:

PROGRAM 13:**Write a PHP program to perform array functions.**

```

<?php
echo"CONVET TO LOWERCASE TO UPPERCASE <br> ";
$salary=array("Sonu"=>"55000","Vimal"=>"20000","Rony"=>"300000");
print_r(array_change_key_case($salary,CASE_UPPER));
echo "<br>";
echo"CONVET TO UPPERCASE TO LOWERCASE <br> ";
$salary=array("Sonu"=>"55000","Vimal"=>"20000","Rony"=>"300000");
print_r(array_change_key_case($salary,CASE_LOWER));
echo "<br>";
$season=array("summer","winter","spring","autumn");
sort($season);
echo "<br>";
echo "ARRAY SORTING <br>";
foreach($season as $s)
{
echo "$s <br>";
}
$season=array("summer","winter","spring","autumn");
rsort($season);
echo "<br>";
echo "ARRAY DESCENDING SORTING<br>";
foreach($season as $s)
{
echo "$s <br>";
}
echo "<br>";

```

```

$season1=array("summer","winter","spring","autumn");
$season2=array("rainy","summer","autumn");
echo "MERGED ARRAY IS :<br>";
$season3=array_merge($season1,$season2);
foreach($season3 as $s)
{
echo "$s <br>";
}
echo "<br>";
echo "INTERSECTION OF 2 ARRAYS <br>";
$season3=array_intersect($season1,$season2);
foreach($season3 as $s)
{
echo "$s <br>";
}
echo "<br>";
echo "ARRAY SEARCHING <br>";
$season4=array("autumn","spring","rainy") ;
$key=array_search("rainy",$season4);
echo $key;
echo "<br>";
echo "ARRAY REVERSE <br>";
$season5=array_reverse($season3);
foreach($season5 as $s)
{
echo "$s <br>";
}
?>

```

OUTPUT:

```
← ↻ ⓘ localhost/aldrin%20php%20new/13.PHP
CONVET TO LOWERCASE TO UPPERCASE
Array ( [SONU] => 55000 [VIMAL] => 20000 [RONY] => 300000 )
CONVET TO UPPERCASE TO LOWERCASE
Array ( [sonu] => 55000 [vimal] => 20000 [rony] => 300000 )

ARRAY SORTING
autumn
spring
summer
winter

ARRAY DESCENDING SORTING
winter
summer
spring
autumn

MERGED ARRAY IS :
summer
winter
spring
autumn
rainy
summer
autumn

INTERSECTION OF 2 ARRAYS
summer
autumn

ARRAY SEARCHING
2
ARRAY REVERSE
autumn
summer
```


PROGRAM 14:

Write a PHP program to perform all arithmetic operation using array return function.

```
<html>
<body>
<?php
function arith($a,$b)
{
$sum=$a+$b;
$sub=$a-$b;
$pro=$a*$b;
$quo=$a/$b;
return array($sum,$sub,$pro,$pro);
}
$res=arith(10,20);
echo "SUM = $res[0]<br>";
echo "DIFFERENCE= $res[1]<br>";
echo "PRODUCT= $res[2]<br>";
echo "QUOTIENT= $res[3]<br>";
?>
</body>
</html>
```

OUTPUT:

← ↻ ⓘ localhost/aldrin%20php%20new/Write%20a%20PHP%20program%20to%20perform%20all%2014.PI

Write a PHP program to perform all arithmetic operation using array return function. SUM = 30
 DIFFERENCE= -10
 PRODUCT= 200
 QUOTIENT= 200

PROGRAM 15:

Write a PHP program to print student progress report using indexed array.

```

<html>

<body>

<?php

$mark = array(50,89,67,90,80);

$total =0;

echo "<h1> PROGRESS REPORT </h1><br><br><br>";

echo "<h2> MARKS </h2><br>";

for($i=0;$i<=4;$i++)

{

    echo "$mark[$i] <br>";

    $total=$total+$mark[$i];

}

$per=$total/5;

if($per>=80)

echo "<br> GRADE A" ;

else if($per>=70)

echo "<br> GRADE B";

else if($per>=60)

echo "<br> GRADE C";

else if($per>=50)

echo "<br> GRADE D";

else if($per>=40)

echo "<br> GRADE E";

else

echo "FAILED";

?>

```

```
</body>
```

```
</html>
```

Output:



PROGRAM 16:

Create an associative array with subject names as keys and marks as the values. Print the subject names along with marks and find the grade.

```
<?php
echo "<h2><u> PROGRESS REPORT </u></h2>";

$mark=array("C
PROGGRAMMING"=>"50","C++"=>"89","JAVA"=>"67","PHP"=>"90","LINUX"=>"80");

$total=0;

foreach($mark as $k=>$v)
{
echo "<b>Subject:<b>$k <br> <b>Mark:<b>$v <br><br>";

$total=$total+$v;
}

$per=$total/5;

if($per>=80)
echo"<br> GRADE A" ;
else if($per>=70)
echo "<br> GRADE B";
else if($per>=60)
echo "<br> GRADE C";
else if($per>=50)
echo "<br> GRADE D";
else if($per>=40)
echo "<br> GRADE E";
else
echo "FAILED";

?>
```

OUTPUT: