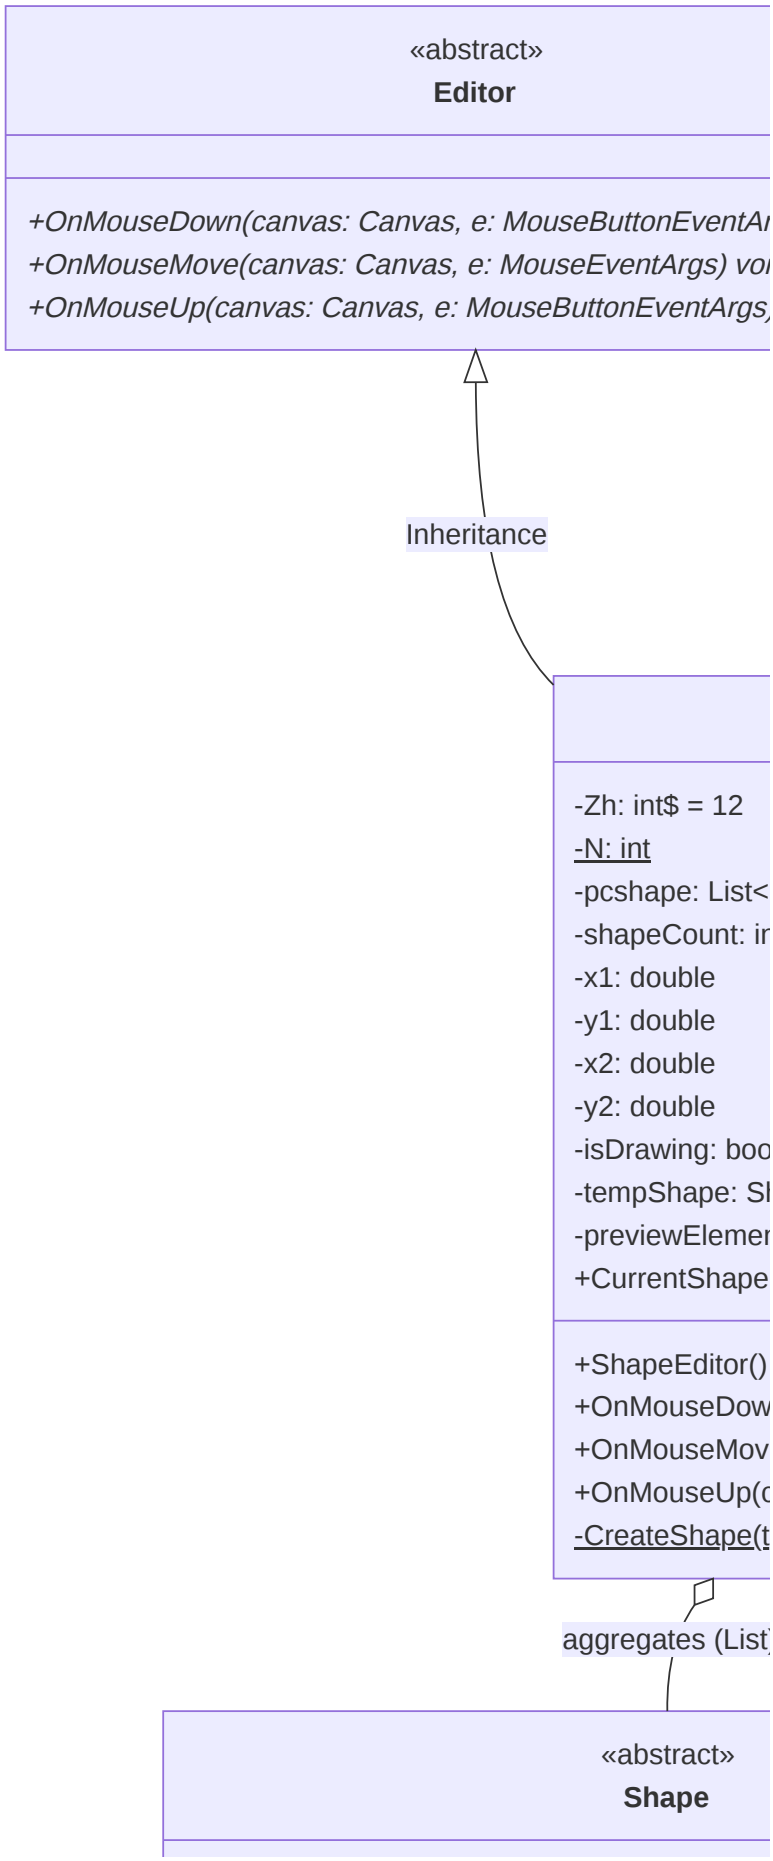
«abstract»
Editor
+OnMouseDown(canvas: Canvas, e: MouseButtonEventAr
+OnMouseMove(canvas: Canvas, e: MouseEventArgs) vo
+OnMouseUp(canvas: Canvas, e: MouseButtonEventArgs,
Inheritance
-Zh: int$ = 12
-N: int
-pcshape: List<
-shapeCount: ir
-x1: double
-y1: double
-x2: double
-y2: double
-isDrawing: boo
-tempShape: Sl
-previewElemer
+CurrentShape
+ShapeEditor()
+OnMouseDow
+OnMouseMov
+OnMouseUp(c
-CreateShape(t
aggregates (List
«abstract»
Shape

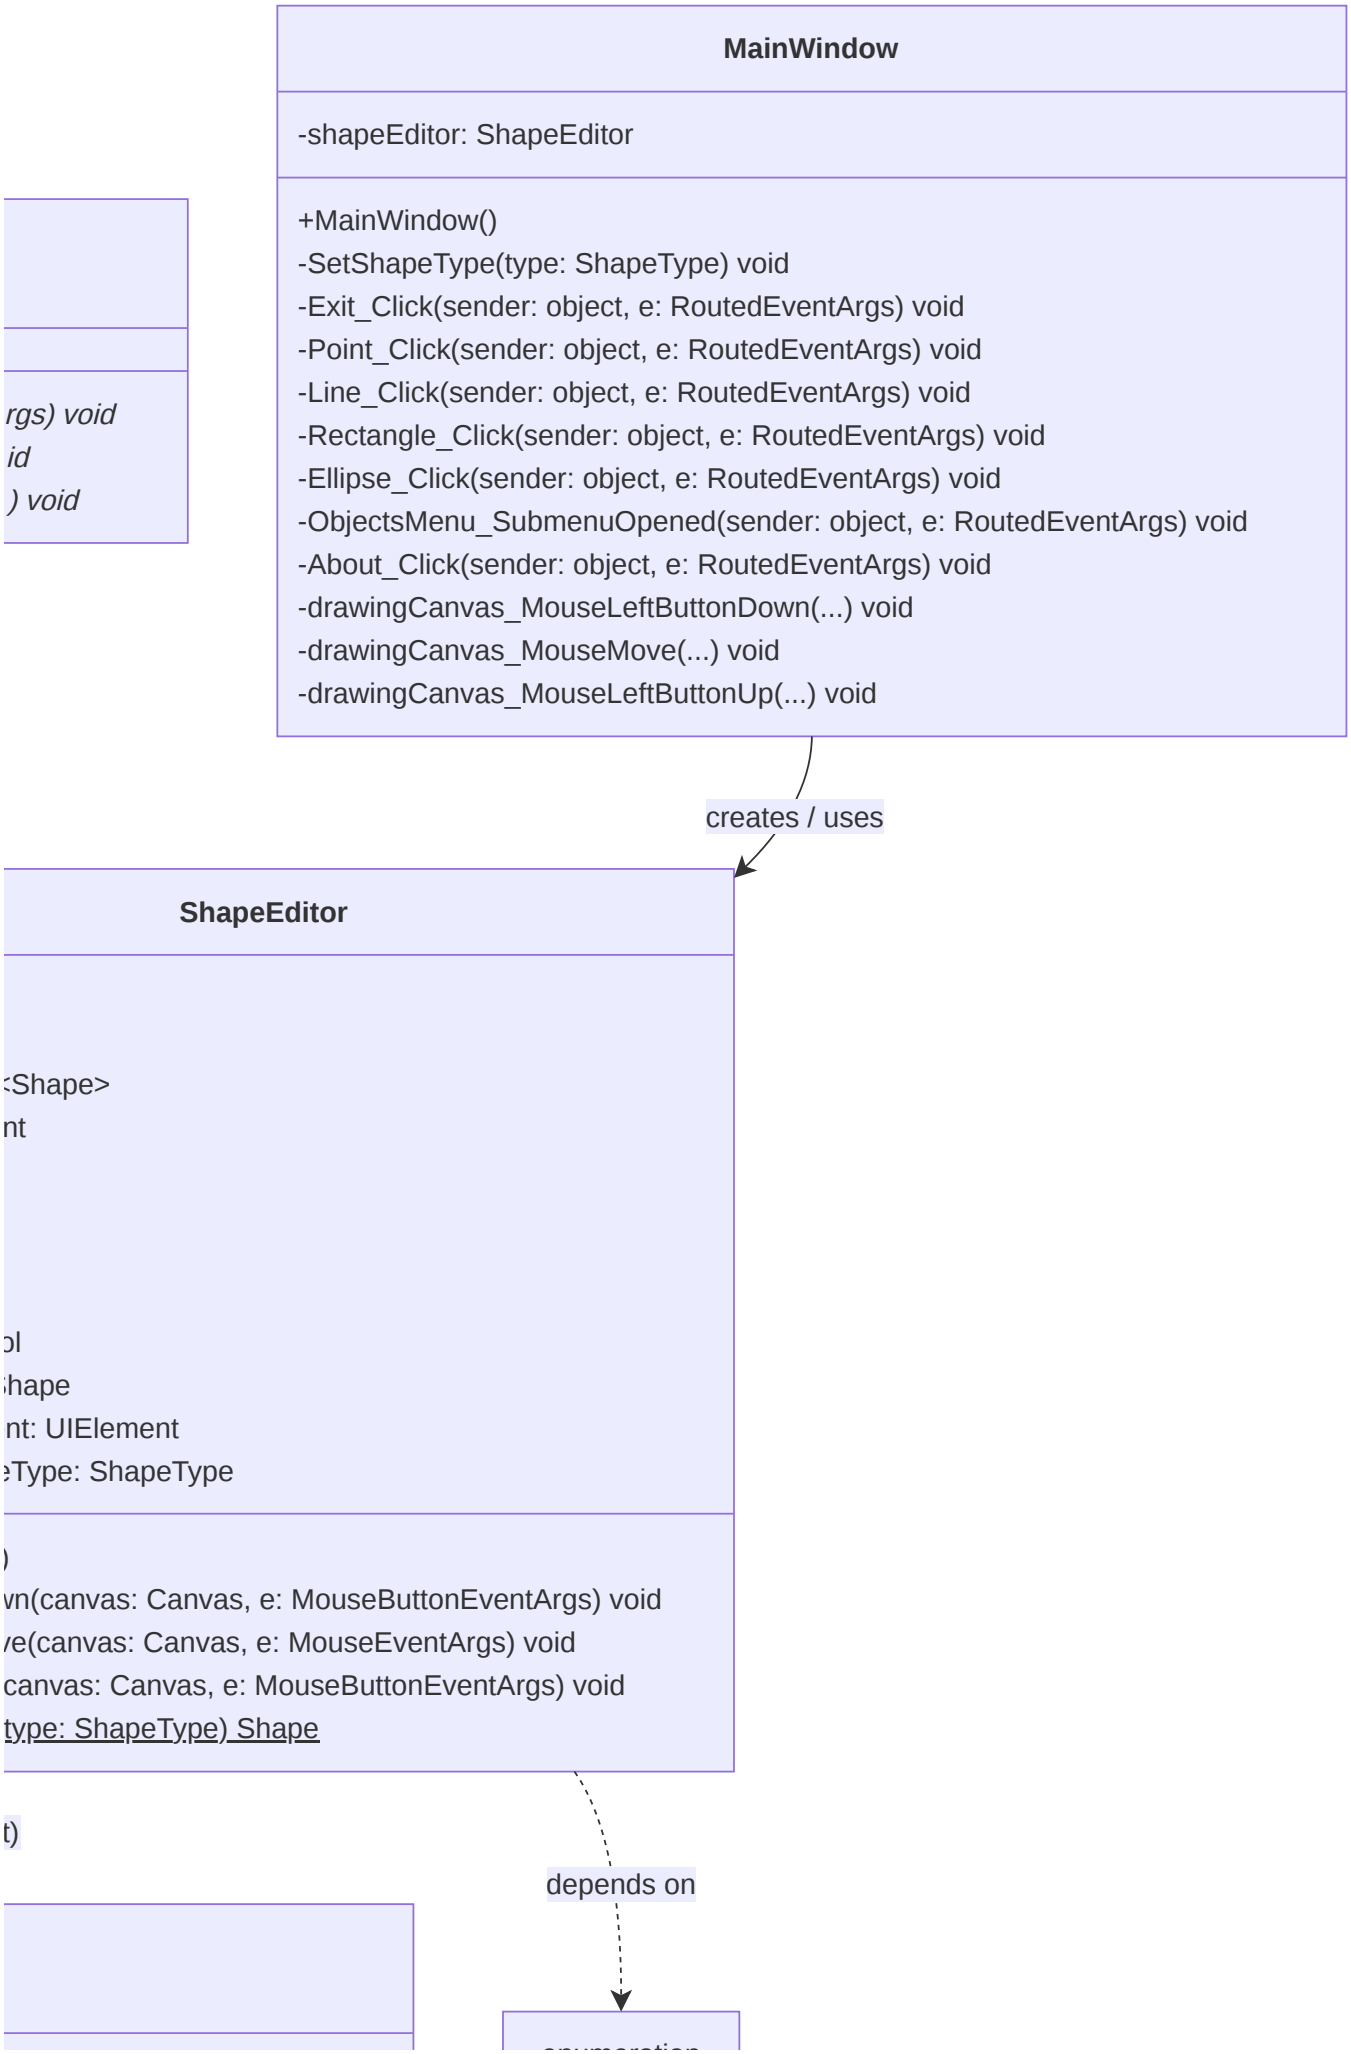
MainWindow
-shapeEditor: ShapeEditor
+MainWindow()
-SetShapeType(type: ShapeType) void
-Exit_Click(sender: object, e: RoutedEventArgs) void
-Point_Click(sender: object, e: RoutedEventArgs) void
-Line_Click(sender: object, e: RoutedEventArgs) void
-Rectangle_Click(sender: object, e: RoutedEventArgs) void
-Ellipse_Click(sender: object, e: RoutedEventArgs) void
-ObjectsMenu_SubmenuOpened(sender: object, e: RoutedEventArgs) void
-About_Click(sender: object, e: RoutedEventArgs) void
-drawingCanvas_MouseLeftButtonDown(...) void
-drawingCanvas_MouseMove(...) void
-drawingCanvas_MouseLeftButtonUp(...) void
rgs) void
id
) void
creates / uses
ShapeEditor
<Shape>
nt
ol
hape
nt: UIElement
eType: ShapeType
)
vn(canvas: Canvas, e: MouseButtonEventArgs) void
ve(canvas: Canvas, e: MouseEventArgs) void
canvas: Canvas, e: MouseButtonEventArgs) void
type: ShapeType) Shape
t)
depends on

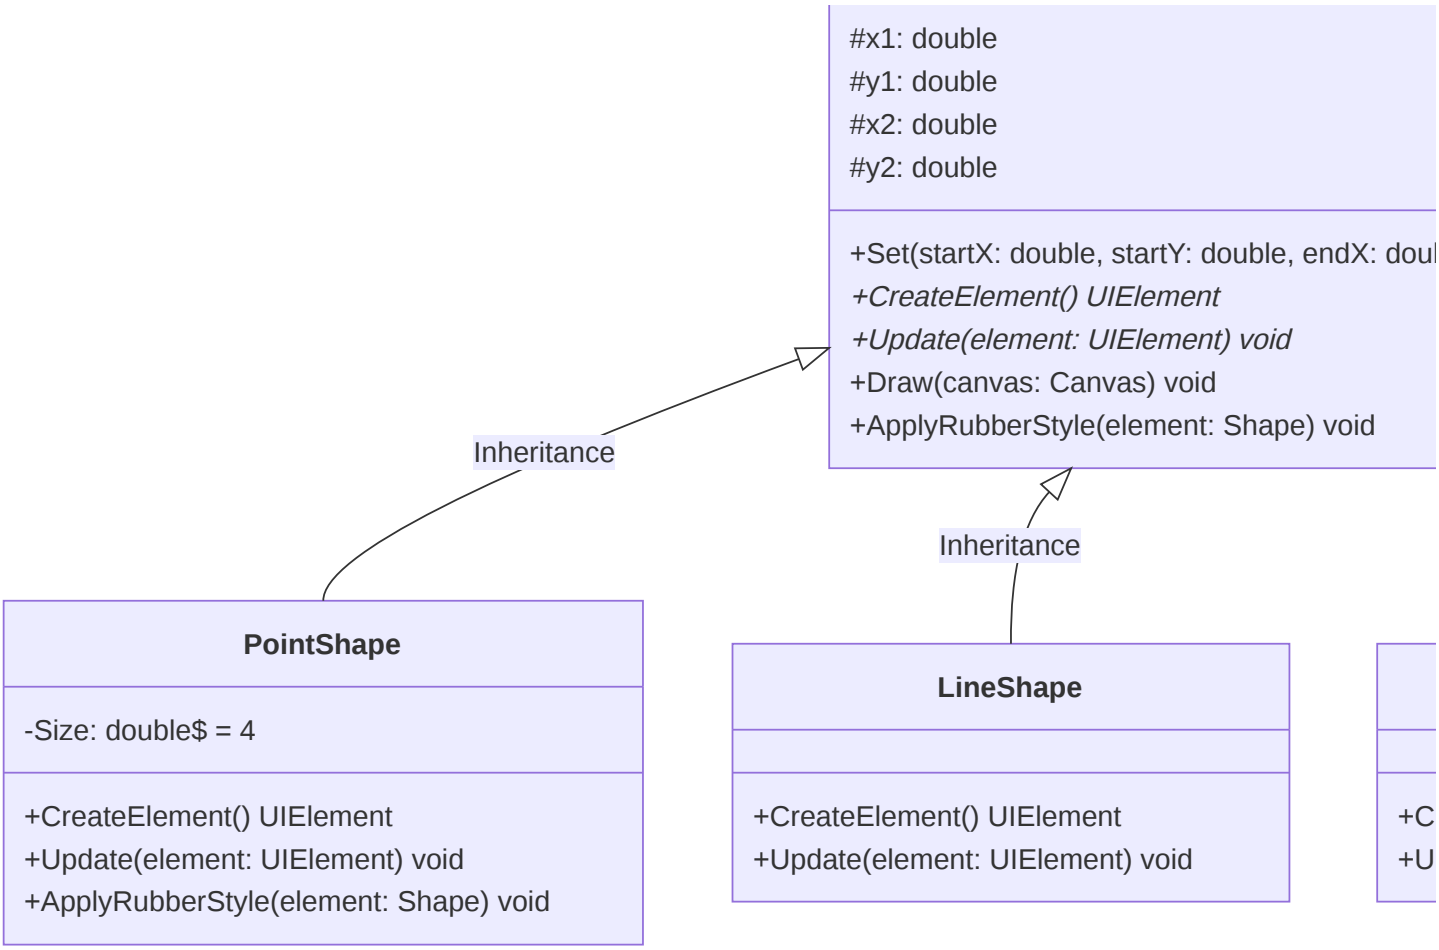
#x1: double
#y1: double
#x2: double
#y2: double
+Set(startX: double, startY: double, endX: doul
+CreateElement() UIElement
+Update(element: UIElement) void
+Draw(canvas: Canvas) void
+ApplyRubberStyle(element: Shape) void
Inheritance
Inheritance
PointShape
-Size: double$ = 4
+CreateElement() UIElement
+Update(element: UIElement) void
+ApplyRubberStyle(element: Shape) void
LineShape
+CreateElement() UIElement
+Update(element: UIElement) void
+C
+U

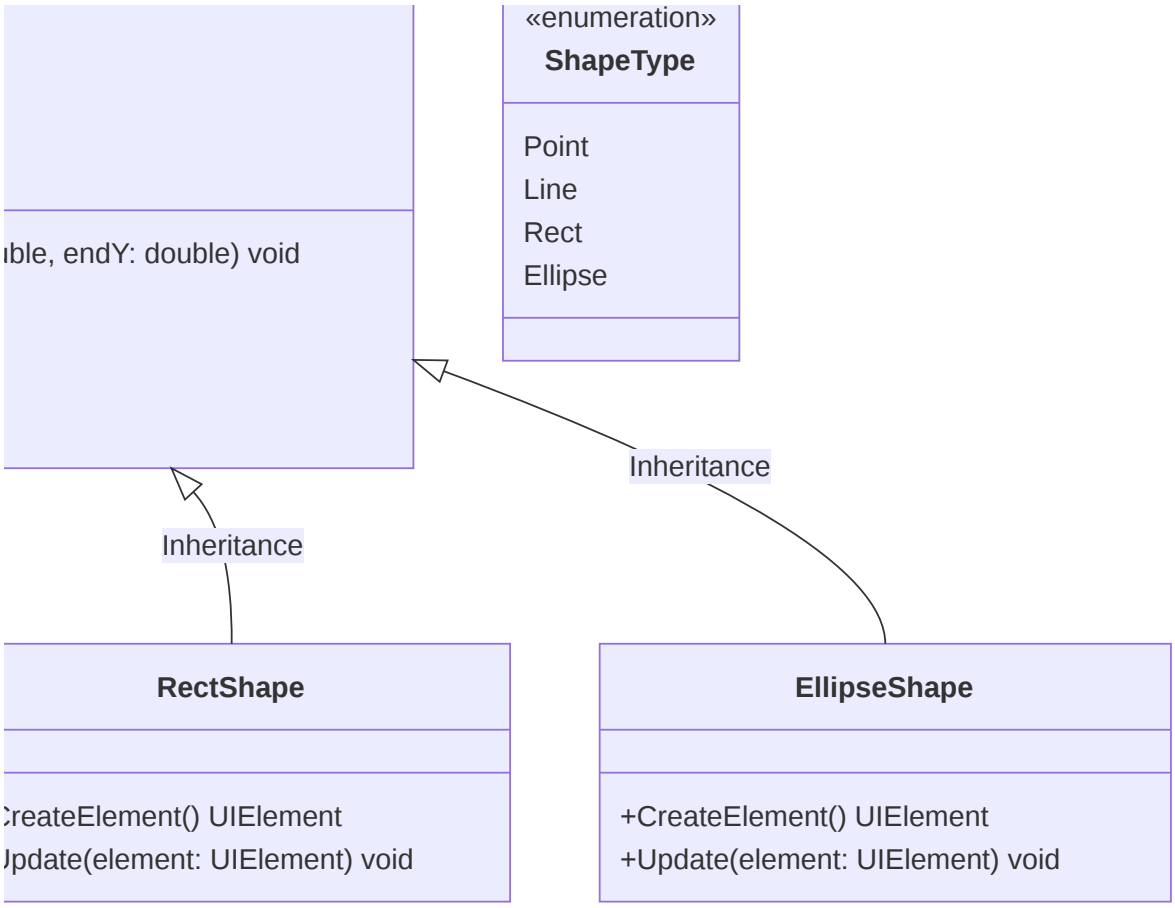
ıble, endY: double) void
«enumeration»
ShapeType
Point
Line
Rect
Ellipse
Inheritance
Inheritance
RectShape
reateElement() UIElement
Update(element: UIElement) void
EllipseShape
+CreateElement() UIElement
+Update(element: UIElement) void