

# Statistical Data Analysis of Student Goals

*Mateusz Zaremba*

*November 4, 2019*

## Contents

|                           |   |
|---------------------------|---|
| R Markdown . . . . .      | 1 |
| Including Plots . . . . . | 1 |

## R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

When you click the **Knit** button a *document* will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:


```
summary(cars)
```

```
##      speed      dist
##  Min.   : 4.0    Min.   :  2.00
## 1st Qu.:12.0    1st Qu.: 26.00
##  Median :15.0    Median : 36.00
##   Mean  :15.4    Mean   : 42.98
## 3rd Qu.:19.0    3rd Qu.: 56.00
##   Max.  :25.0    Max.    :120.00
```

## Including Plots

You can also embed plots, for example:

```
plot(pressure)
```

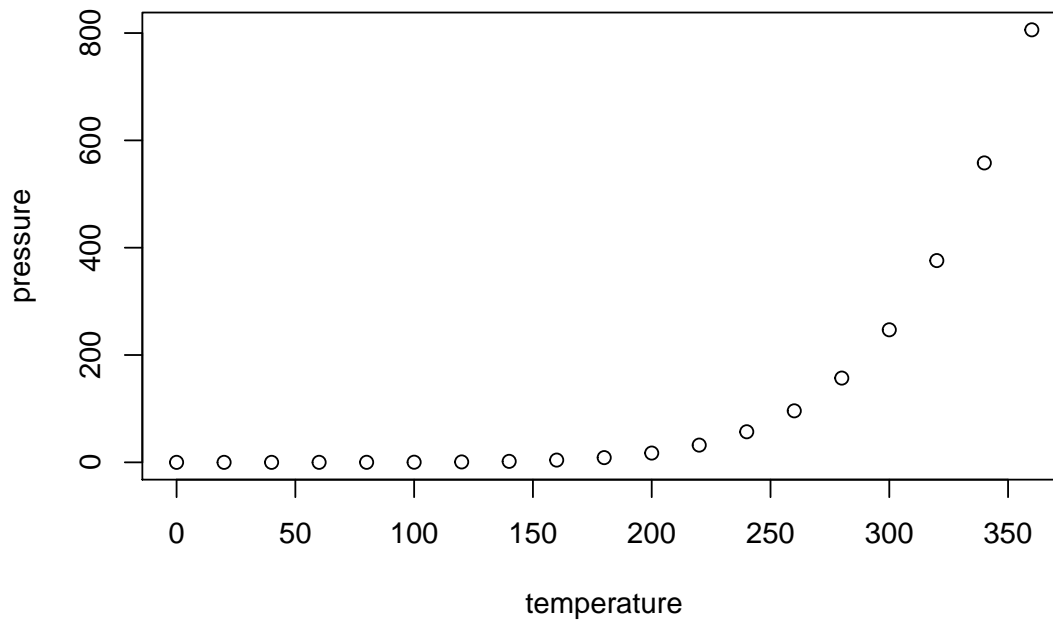

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.

```
library(tidyverse)
```

```
## -- Attaching packages -----
## v ggplot2 3.2.1    v purrr  0.3.3
## v tibble  2.1.3    v dplyr  0.8.3
## v tidyr   1.0.0    v stringr 1.4.0
## v readr   1.3.1    v forcats 0.4.0

## -- Conflicts -----
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()    masks stats::lag()
```

```
library(modelr)
library(rsample)
library(broom)
```

```
##
## Attaching package: 'broom'

## The following object is masked from 'package:modelr':
##
##   bootstrap
```

```

library(magrittr)

##
## Attaching package: 'magrittr'

## The following object is masked from 'package:purrr':
##
##      set_names

## The following object is masked from 'package:tidyr':
##
##      extract

# set seed for randomization to ensure that results are always reproduced precisely
set.seed(1234)

# read csv file (worse variable recognition)
f <- "data/StudentGoalsData.csv"
StudentGoalsData <- read_csv(f)

## Parsed with column specification:
## cols(
##   .default = col_double()
## )

## See spec(...) for full column specifications.

# drop 'seq' column since it doesn't serve any purpose
StudentGoalsData <- StudentGoalsData %>% ungroup %>% select(-seq)

# count all the students before cleaning and dropping the data
n <- tally(StudentGoalsData)

# # clean data - drop results containing empty cells
CleanedStudentGoalsData <- drop_na(StudentGoalsData)

# save CleanedStudentGoalsData table in a simple variable called 'dat'
dat <- CleanedStudentGoalsData

# save CleanedStudentGoalsData table as tibble table in a variable called 'dat_tibble'
dat_tibble <- tibble::as_tibble(CleanedStudentGoalsData)

```

```

# Renaming columns according to random order: 6, 12, 11, 1, 7, 2, 10, 8, 5, 3, 9, 4
renamed_data <- dat_tibble %>%
  rename(
    Q6 = q1,
    Q12 = q2,
    Q11 = q3,
    Q1 = q4,
    Q7 = q5,
    Q2 = q6,
    Q10 = q7,
    Q8 = q8,
    Q5 = q9,
    Q3 = q10,
    Q9 = q11,
    Q4 = q12
  )
# going back to lower case 'q' to keep naming consistent with the original data set
renamed_data2 <- renamed_data %>%
  rename(
    q1 = Q1, q2 = Q2, q3 = Q3, q4 = Q4, q5 = Q5, q6 = Q6,
    q7 = Q7, q8 = Q8, q9 = Q9, q10 = Q10, q11 = Q11, q12 = Q12
  )
# save renamed table in 'dat' variable
dat <- renamed_data2

```

```


# renaming values to their proper labeling from assets/'Student Goals - Coding Information.pdf'
# replace numericals in the 'sex' column with proper sex names
dat$sex[dat$sex==1] <- 'Male'
dat$sex[dat$sex==2] <- 'Female'
# replace numericals in the 'subject' column with proper subject names
dat$subject[dat$subject==1] <- 'Management'
dat$subject[dat$subject==2] <- 'Law'
dat$subject[dat$subject==3] <- 'Tourism'
dat$subject[dat$subject==4] <- 'General Economics'
dat$subject[dat$subject==5] <- 'Accounting'
dat$subject[dat$subject==6] <- 'Statistics'

```

```

## DATA EXPLORATION #####
# bar chart example
ggplot(data = diamonds) +
  geom_bar(mapping = aes(x = cut))

```

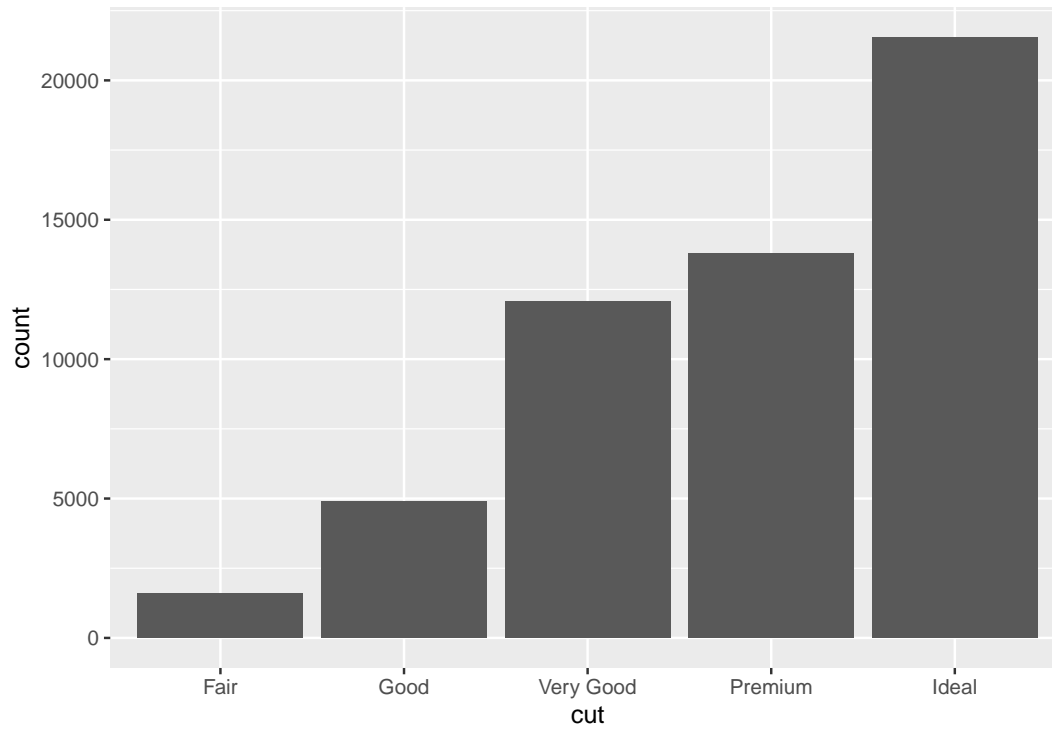


```
head(diamonds)
```

| carat | cut       | color | clarity | depth | table | price | x    | y    | z    |
|-------|-----------|-------|---------|-------|-------|-------|------|------|------|
| 0.23  | Ideal     | E     | SI2     | 61.5  | 55    | 326   | 3.95 | 3.98 | 2.43 |
| 0.21  | Premium   | E     | SI1     | 59.8  | 61    | 326   | 3.89 | 3.84 | 2.31 |
| 0.23  | Good      | E     | VS1     | 56.9  | 65    | 327   | 4.05 | 4.07 | 2.31 |
| 0.29  | Premium   | I     | VS2     | 62.4  | 58    | 334   | 4.20 | 4.23 | 2.63 |
| 0.31  | Good      | J     | SI2     | 63.3  | 58    | 335   | 4.34 | 4.35 | 2.75 |
| 0.24  | Very Good | J     | VVS2    | 62.8  | 57    | 336   | 3.94 | 3.96 | 2.48 |


```
head(dat)
```

| year | age | sex    | subject    | q6 | q12 | q11 | q1 | q7 | q2 | q10 | q8 | q5 | q3 | q9 | q4 | interest | enj |
|------|-----|--------|------------|----|-----|-----|----|----|----|-----|----|----|----|----|----|----------|-----|
| 4    | 20  | Male   | Management | 6  | 2   | 4   | 6  | 7  | 5  | 4   | 5  | 1  | 3  | 6  | 6  | 7        |     |
| 4    | 20  | Male   | Management | 3  | 1   | 1   | 3  | 5  | 3  | 4   | 5  | 3  | 1  | 5  | 1  | 7        |     |
| 3    | 19  | Female | Management | 2  | 2   | 1   | 6  | 5  | 4  | 1   | 7  | 1  | 1  | 5  | 1  | 7        |     |
| 3    | 19  | Male   | Management | 4  | 5   | 5   | 3  | 6  | 4  | 6   | 6  | 4  | 4  | 6  | 3  | 7        |     |
| 3    | 18  | Female | Management | 6  | 4   | 2   | 4  | 7  | 4  | 6   | 7  | 2  | 2  | 7  | 2  | 7        |     |
| 3    | 19  | Male   | Management | 7  | 2   | 2   | 6  | 7  | 6  | 7   | 7  | 5  | 5  | 7  | 5  | 7        |     |


```
# bar chart example 2
ggplot(data = diamonds) +
  geom_bar(mapping = aes(x = cut, fill = clarity))
```

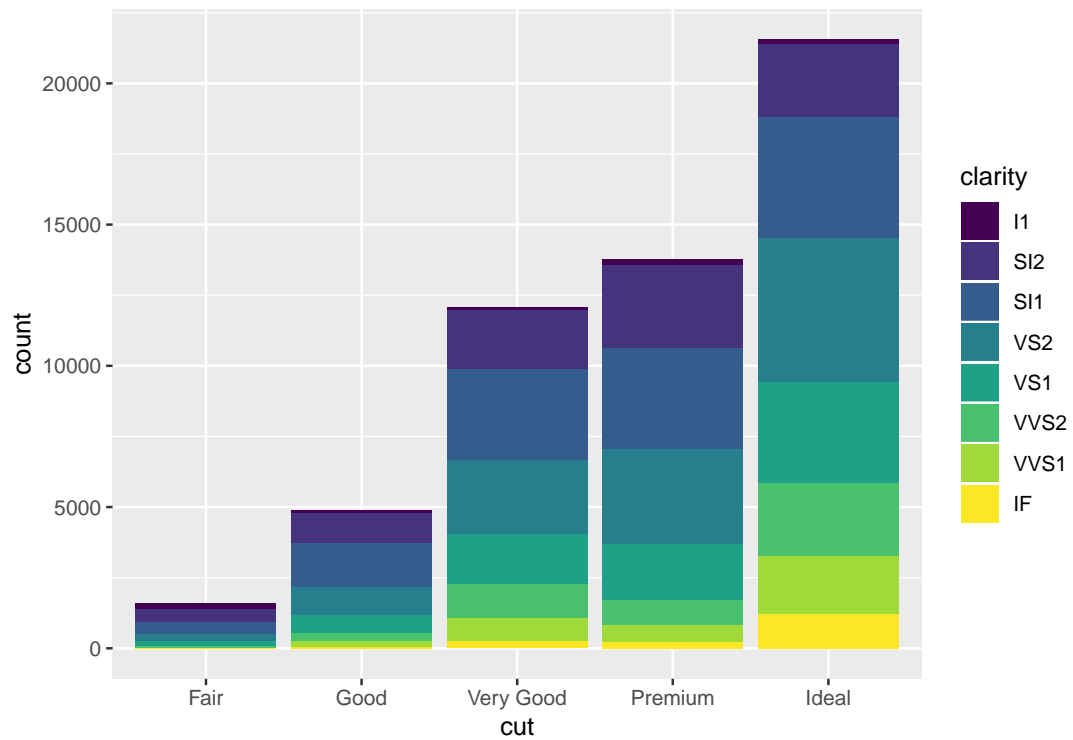

```
# gender in numbers
ggplot(data = dat) +
  geom_bar(mapping = aes(x = sex, fill = sex))
```

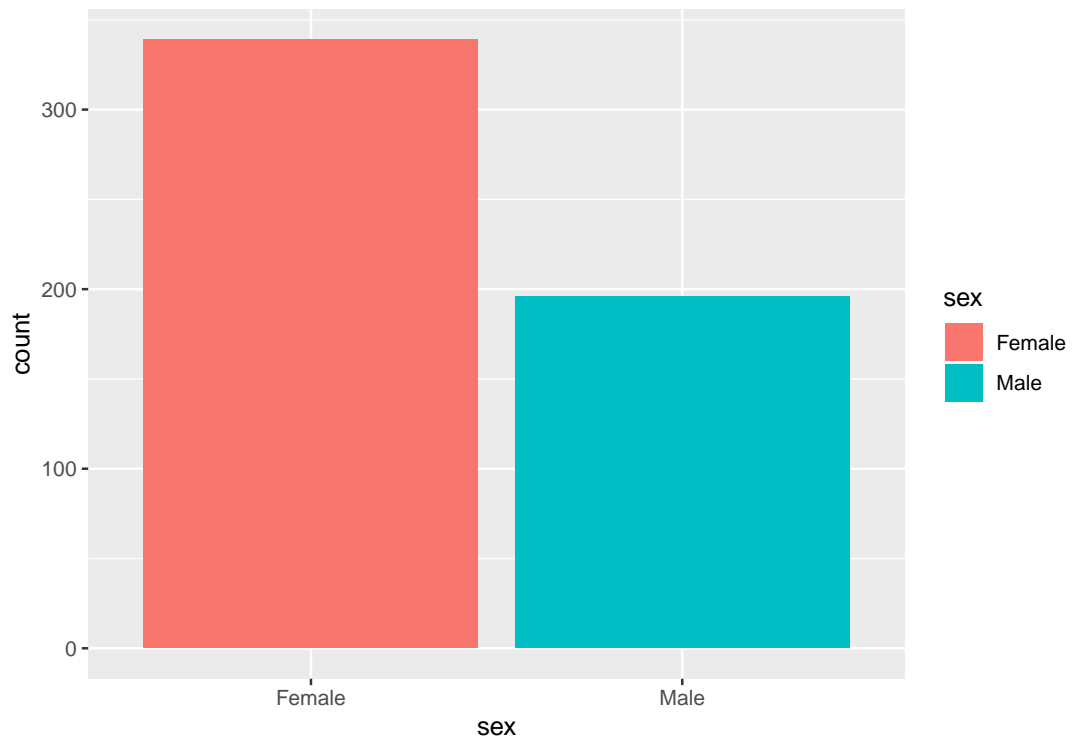


```
# subject by gender  
ggplot(data = dat) +  
  geom_bar(mapping = aes(x = sex, fill = subject))
```

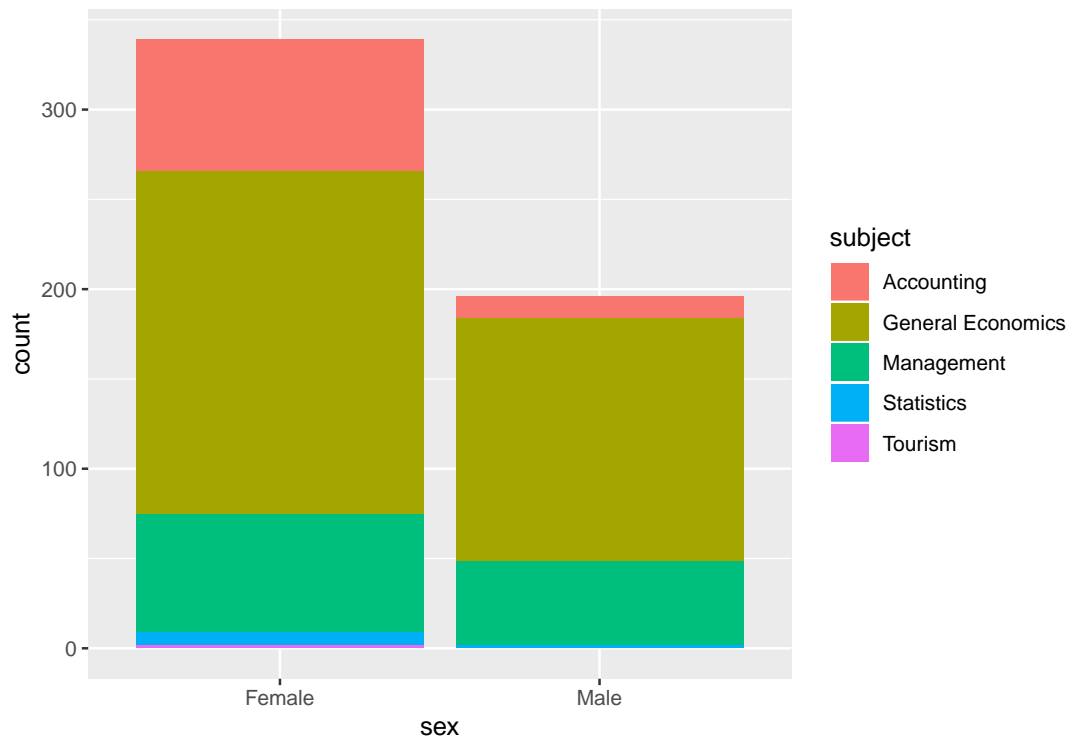


```
#subject by gender with alpha blending  
ggplot(data = dat) +  
  geom_bar(alpha = 0.85, mapping = aes(x = sex, fill = subject))
```




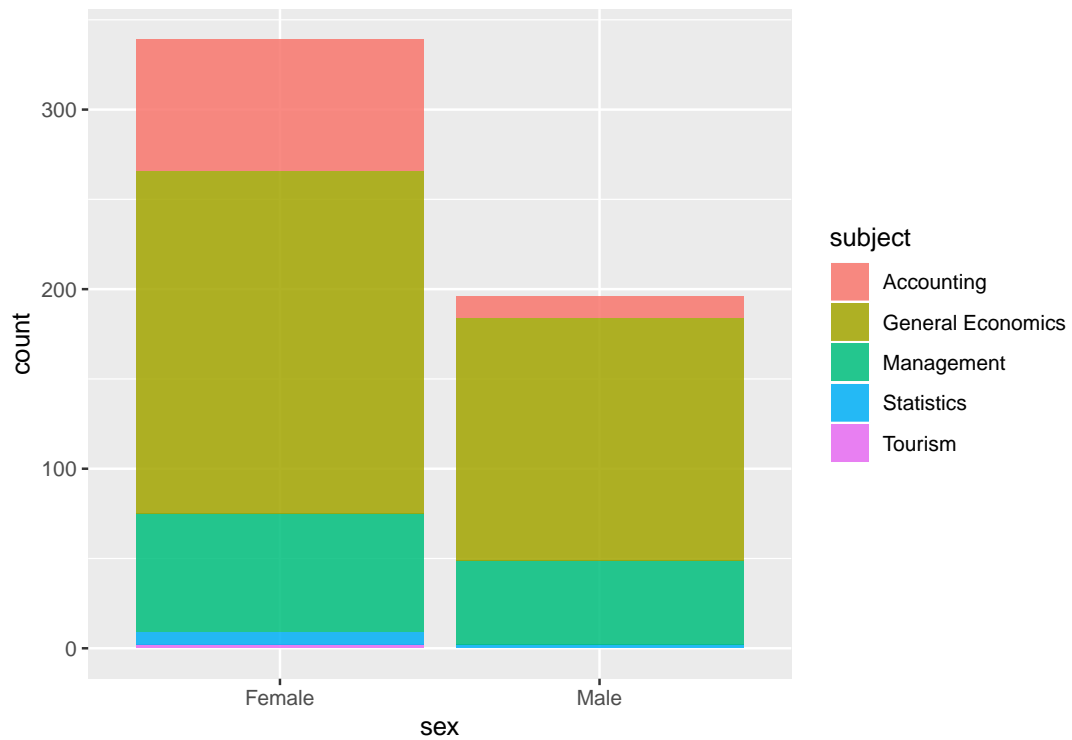


```
#subject by gender and normalizing using position = "fill"  
ggplot(data = dat) +  
  geom_bar(mapping = aes(x = sex, fill = subject), position = "fill")
```

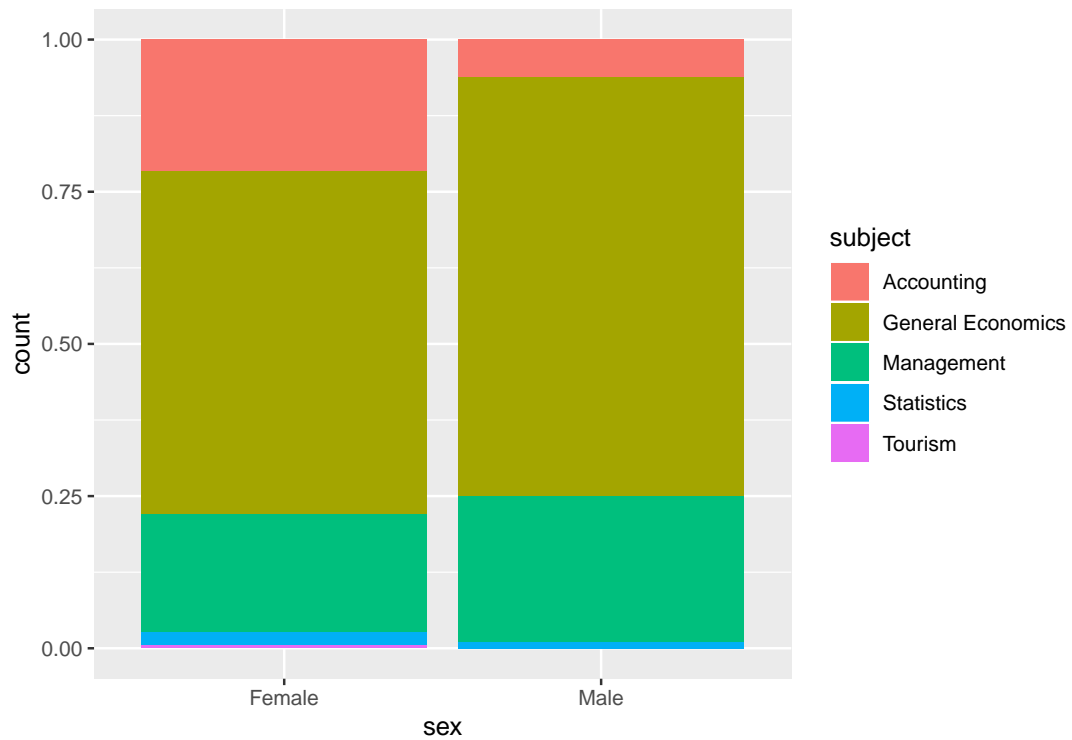


```
#subject by gender and normalizing using position = "dodge" to place overlapping objects directly  
ggplot(data = dat) +  
  geom_bar(mapping = aes(x = sex, fill = subject), position = "dodge")
```

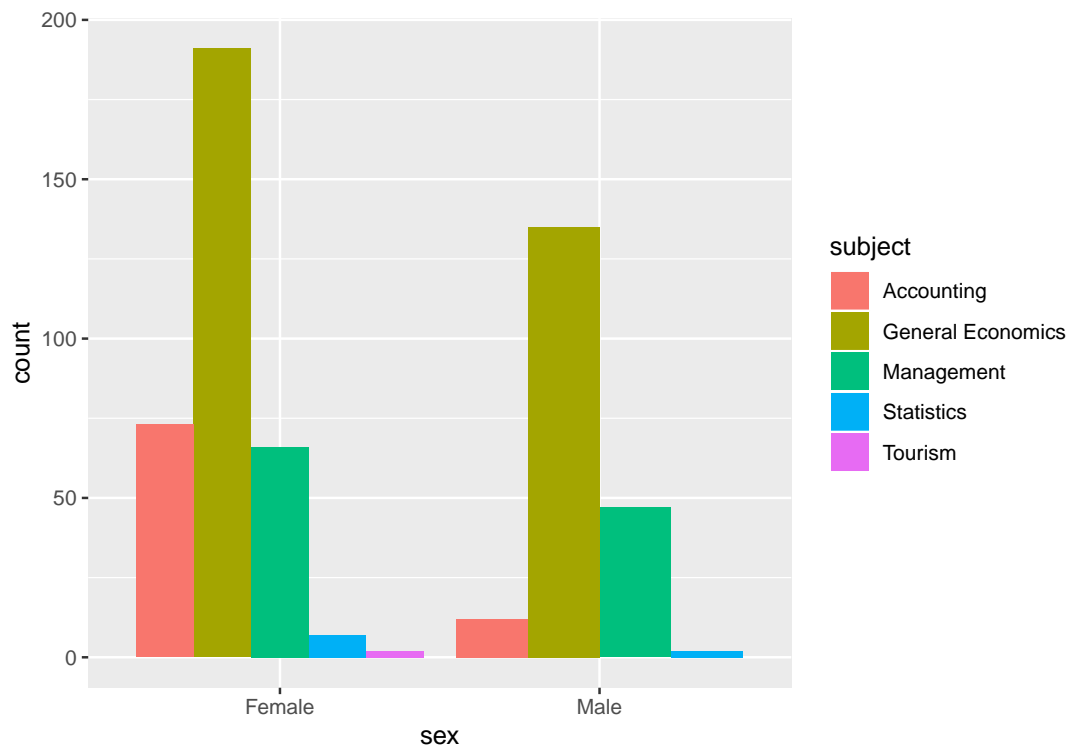


```
# age by gender
ggplot(data = dat) +
  geom_bar(mapping = aes(x = age, fill = sex))
```

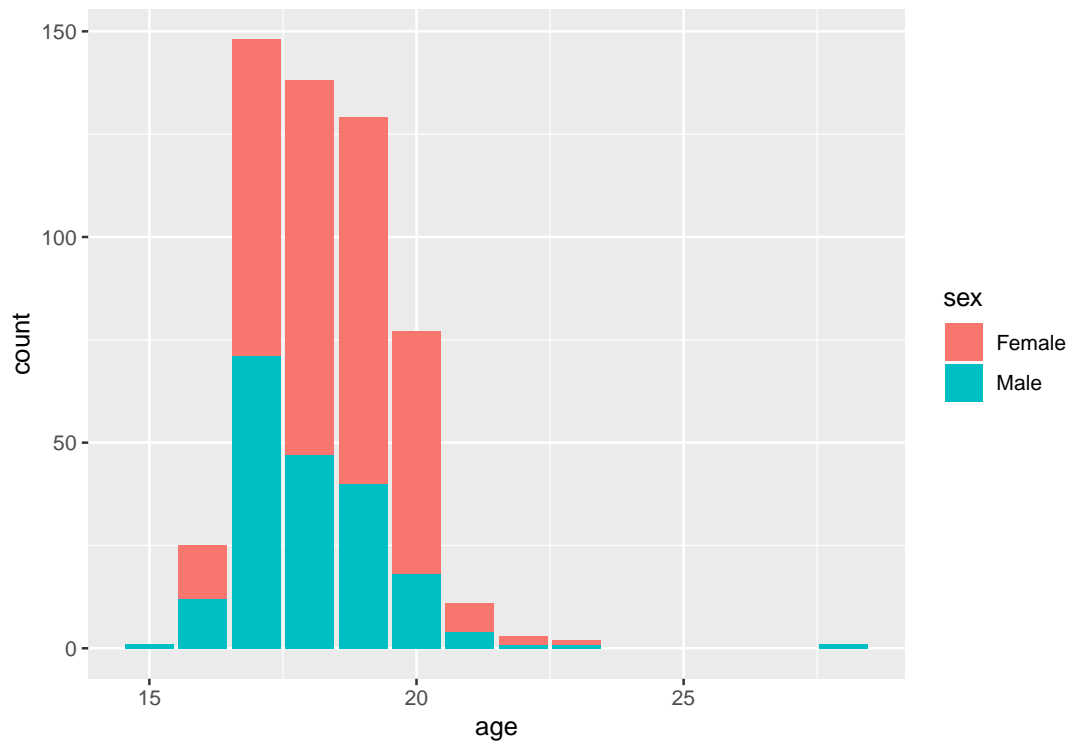


```
# age by subject  
ggplot(data = dat) +  
  geom_bar(mapping = aes(x = age, fill = subject))
```

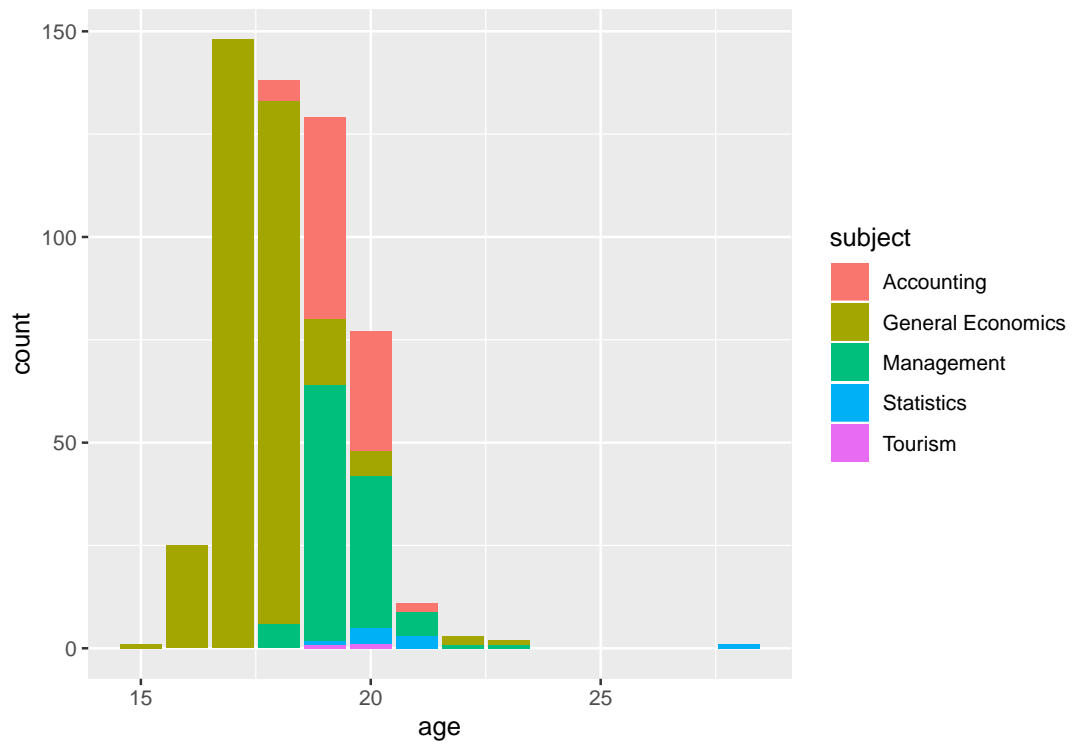


```
# course year by gender
ggplot(data = dat) +
  geom_bar(mapping = aes(x = year, fill = sex))
```

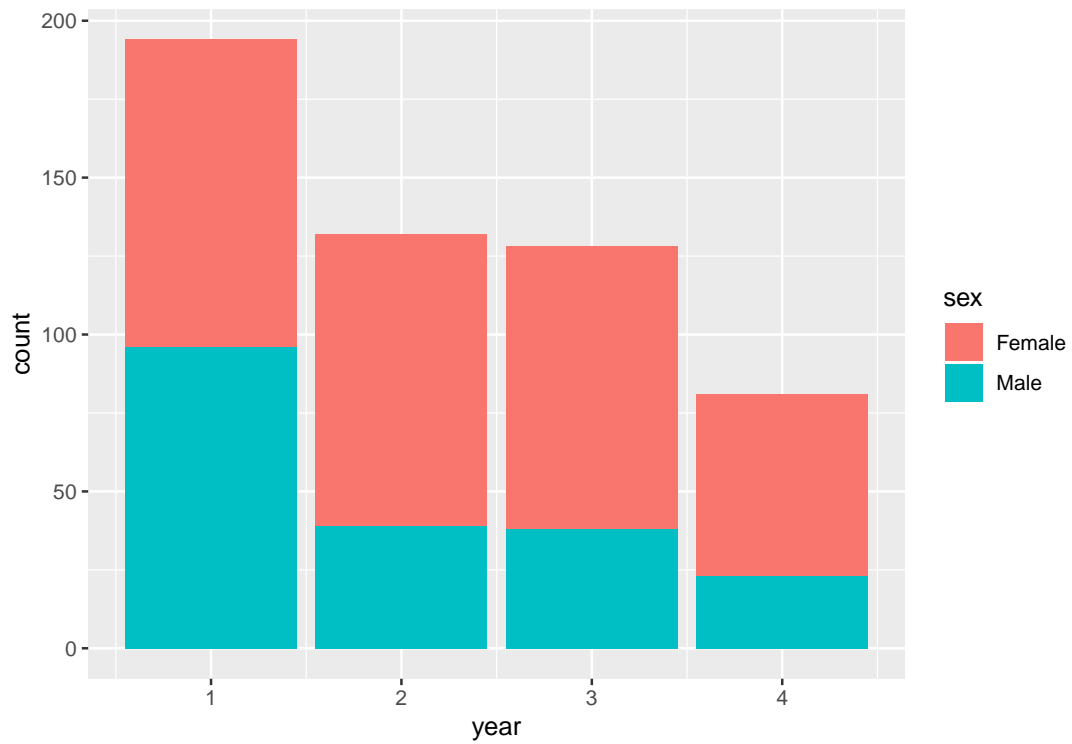

```
# "expect my courses this semester to be very interesting" by gender
ggplot(data = dat) +
  geom_bar(mapping = aes(x = interest, fill = sex))
```

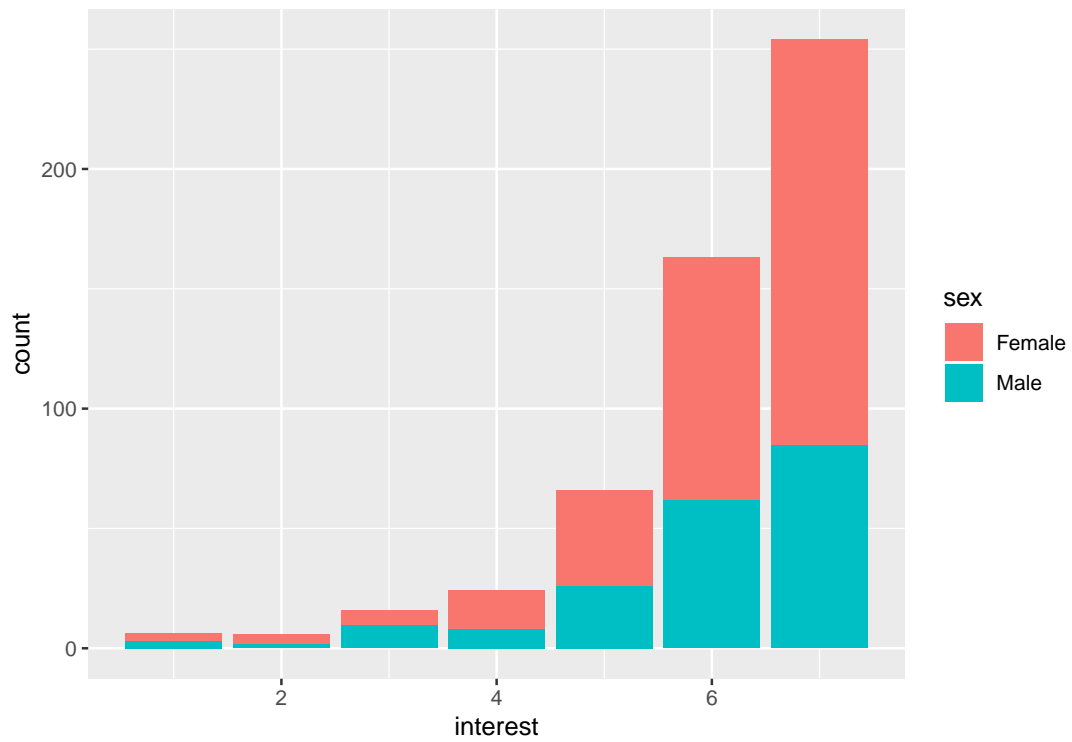


```
# "expect my courses this semester to be very enjoyable" by gender
ggplot(data = dat) +
  geom_bar(mapping = aes(x = enjoy, fill = sex))
```

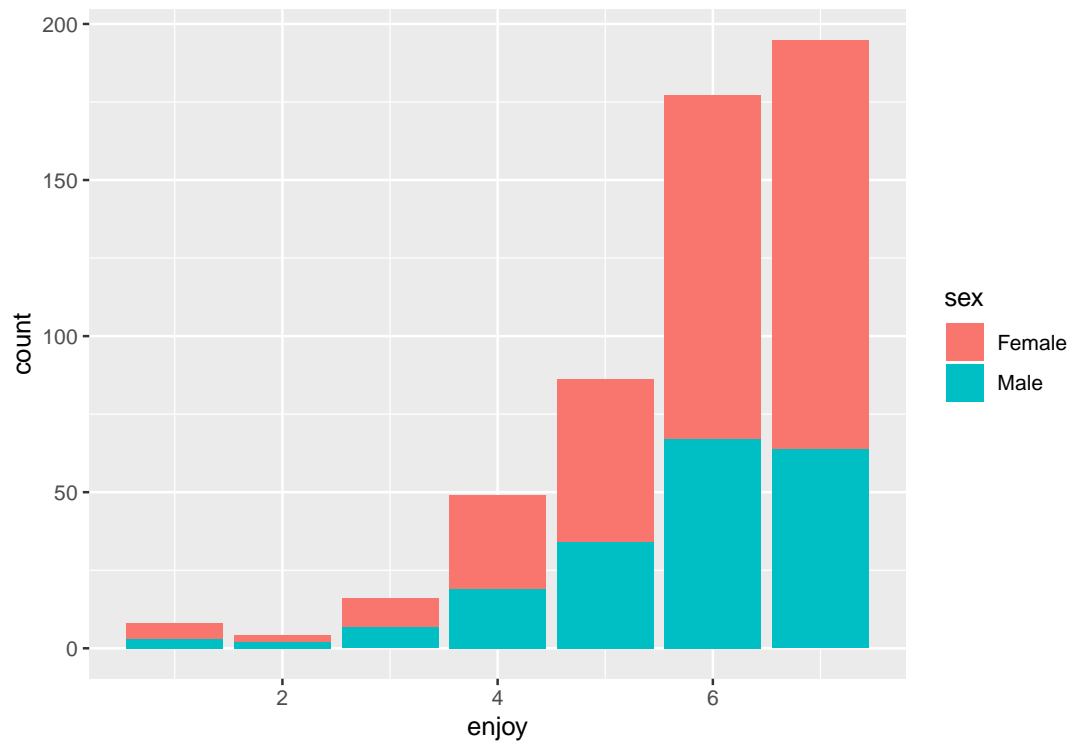


```
# relative importance by gender  
ggplot(data = dat) +  
  geom_bar(mapping = aes(x = mastgrad, fill = sex))
```




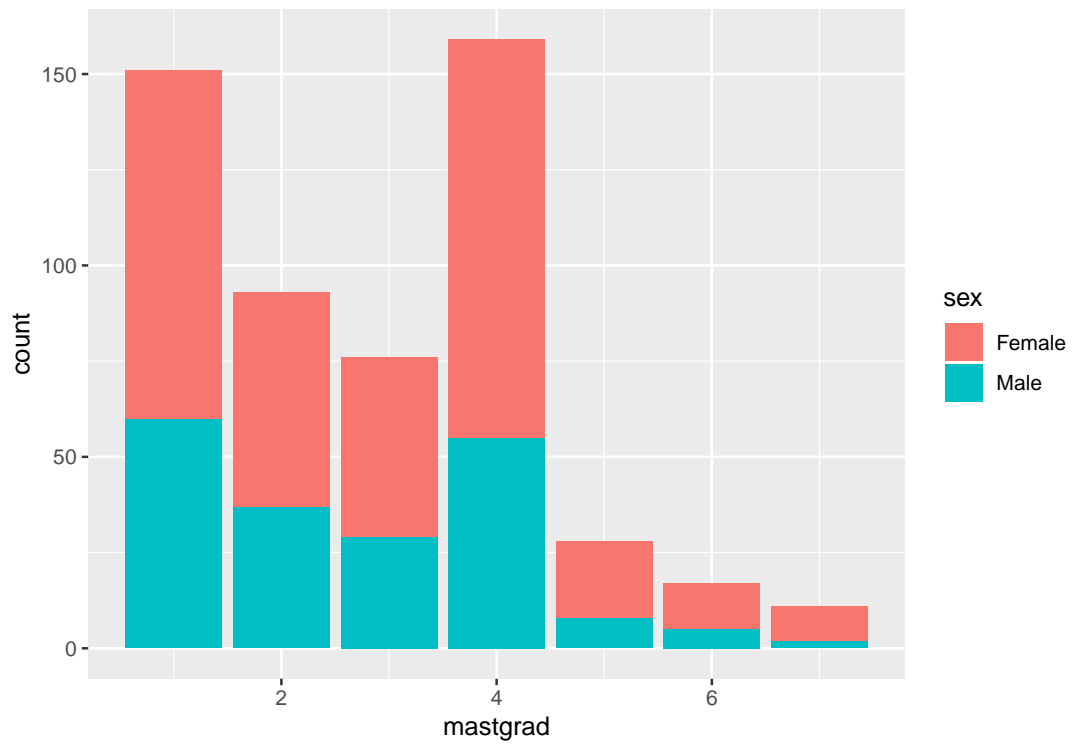

```
#subject by gender and normalizing using position = "dodge" to place overlapping objects directly  
ggplot(data = dat) +  
  geom_bar(mapping = aes(x = sex, fill = subject), position = "dodge")
```

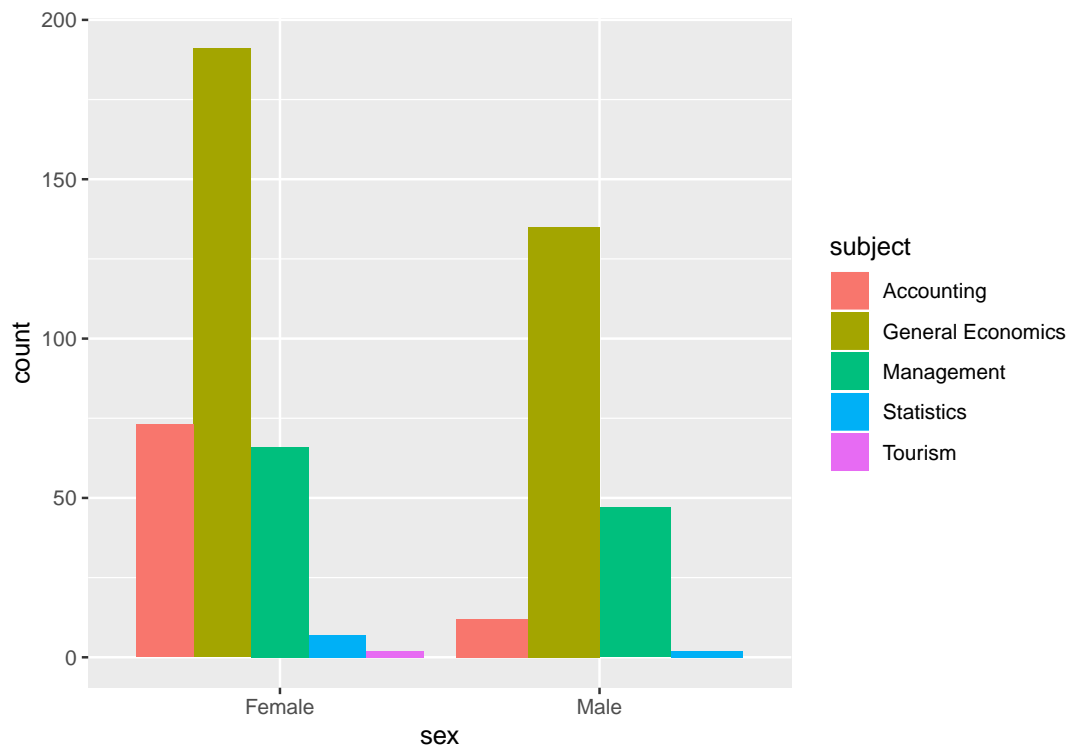

```
# plot answers to q1 with relation to the student's year  
ggplot(data = dat) +  
  geom_point(mapping = aes(x = year, y = q1, colour = year))
```

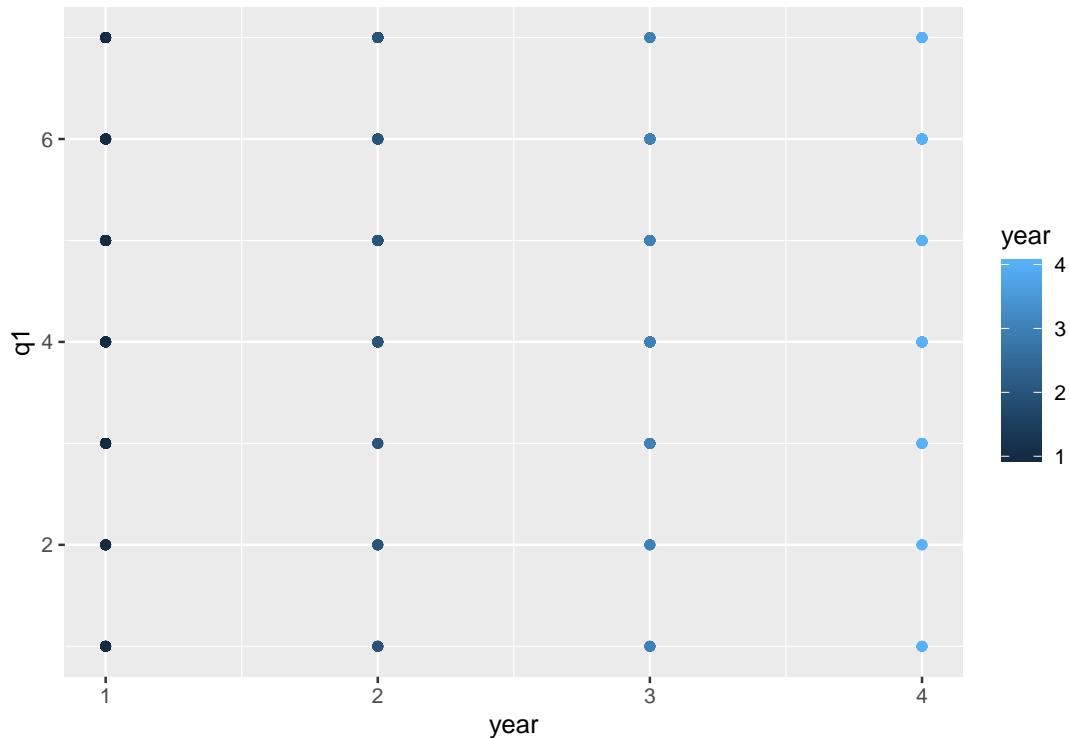

```
#####
```

```
## Calculate mean for 7 categories:
# across 7 categories:
# - q1, q2, q3 - Performance approach questions
# - q4, q5, q6 - Performance avoidance questions
# - q7, q8, q9 - Mastery-Approach
# - q10, q11, q12 - Mastery-Avoidance
# - Interest
# - Enjoyment
# - Understanding/Grades

mean_dat <- dat
# get mean from q1, q2, q3 columns (Performance approach questions) for all the students
# save the results in 'm1' column and add it to 'mean_dat' table
mean_dat <- mean_dat %>%
  mutate(m1 = pmap_dbl(select(., c("q1", "q2", "q3")), function(...) mean(c(...))))

# get mean from q4, q5, q6 columns (Performance avoidance questions) for all the students,
# save the results in 'm2' column and add it to 'mean_dat' table
mean_dat <- mean_dat %>%
  mutate(m2 = pmap_dbl(select(., c("q4", "q5", "q6")), function(...) mean(c(...))))

# get mean from q7, q8, q9 columns (Mastery approach questions) for all the students
```

```

# save the results in 'm3' column and add it to 'mean_dat' table
mean_dat <- mean_dat %>%
  mutate(m3 = pmap_dbl(select(., c("q7", "q8", "q9")), function(...) mean(c(...))))

# get mean from q10, q11, q12 columns (Mastery avoidance questions) for all the students
# save the results in 'm4' column and add it to 'mean_dat' table
mean_dat <- mean_dat %>%
  mutate(m4 = pmap_dbl(select(., c("q10", "q11", "q12")), function(...) mean(c(...))))

# get mean from 'interest' column (Course interestedness expectations) for all the students
# save the results in 'm_interest' column and add it to 'mean_dat' table
mean_dat <- mean_dat %>%
  mutate(m_interest = pmap_dbl(select(., c("interest")), function(...) mean(c(...))))

# get mean from 'enjoy' column (Course enjoyment expectations) for all the students
# save the results in 'm_interest' column and add it to 'mean_dat' table
mean_dat <- mean_dat %>%
  mutate(m_enjoy = pmap_dbl(select(., c("enjoy")), function(...) mean(c(...))))

# get mean from 'mastgrad' column (1 (Understanding) - 7 (Grades) Importance) for all the students
# save the results in 'm_interest' column and add it to 'mean_dat' table
mean_dat <- mean_dat %>%
  mutate(m_mastgrad = pmap_dbl(select(., c("mastgrad")), function(...) mean(c(...))))

# save final cleaned table
write_csv(mean_dat, "data/MeanCleanedStudentGoals.csv")
# save final cleaned table as tibble table
dat_tibble <- as_tibble(mean_dat)

# m1
# Plot mean results of performance approach questions
# for all students with relation to student's year, sex and subject
# data
d <- ggplot(data = dat, aes(mean_dat$year, mean_dat$m1))
# mapping data (use "jitter" to improve the graph and avoid gridding)
l <- d + geom_jitter(aes(colour = sex, shape = subject))
# smoothing
s <- l + geom_smooth(method = loess, formula = y ~ x, se = TRUE)
# adding theme
t <- s + theme_dark()
# adding colouring
c <- t + scale_colour_brewer(palette = "Pastel1")
# adding labels
c + labs(
  title = "Student's grade-orientation focus set on basis of:
different years of study, sexes and subjects.",
  subtitle = "How important it is to students to do better than others?",

```

```

caption = "Data source: Elliot, A. J. and McGregor, H. A. (2001)",
x = "Year (1-4)",
y = "Answer: 1 (Low) - 7 (High)",
colour = "Sex",
shape = "Subject"
)

```

```

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : pseudoinverse used at 0.985

```

```

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : neighborhood radius 2.015

```

```

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : reciprocal condition number 2.858e-16

```

```

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : There are other near singularities as well. 1

```

```

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : pseudoinverse used
## at 0.985

```

```

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : neighborhood radius
## 2.015

```

```

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : reciprocal
## condition number 2.858e-16

```


```

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : There are other
## near singularities as well. 1

```

Student's grade-orientation focus set on basis of:  
different years of study, sexes and subjects.

How important it is to students to do better than others?

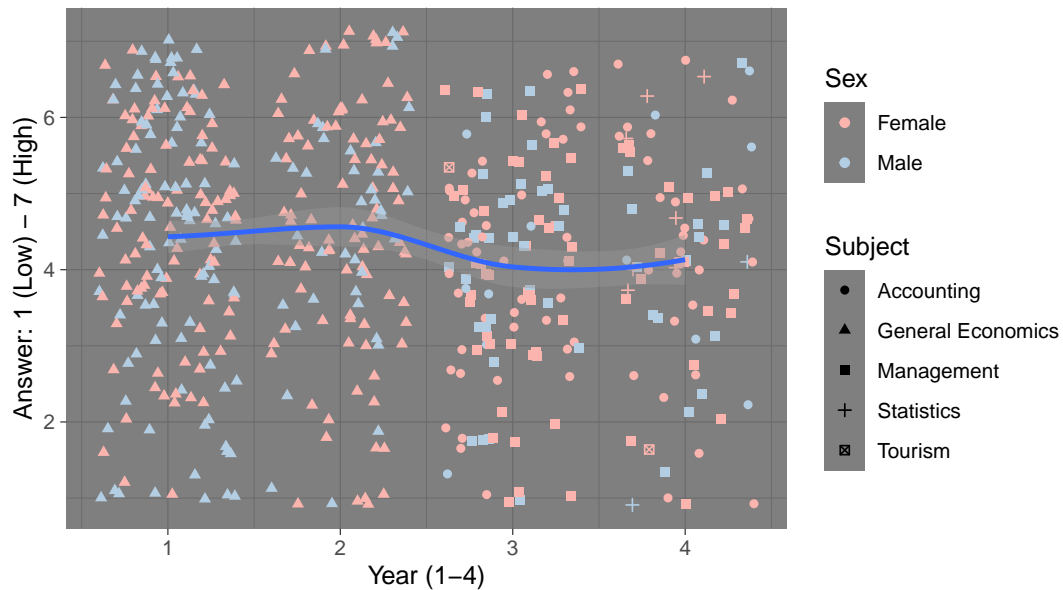

Data source: Elliot, A. J. and McGregor, H. A. (2001)

```
# m2
# Plot mean results of performance avoidance
# for all students with relation to student's year, sex and subject
# data
d <- ggplot(data = dat, aes(year, mean_dat$m2))
# mapping data (use "jitter" to improve the graph and avoid gridding)
l <- d + geom_jitter(aes(colour = sex, shape = subject))
# smoothing
s <- l + geom_smooth(method = loess, formula = y ~ log(x), se = TRUE)
# adding theme
t <- s + theme_dark()
# adding colouring
c <- t + scale_colour_brewer(palette = "Pastell1")
# adding labels
c + labs(
  title = "Students' grade-orientation focus set on basis of:
different years of study, sexes and subjects.",
  subtitle = "How motivated are students by fear of performing poorly?",
  caption = "Data source: Elliot, A. J. and McGregor, H. A. (2001)",
  x = "Year: 1 - 4",
  y = "Answer: 1 (Low) - 7 (High)",
  colour = "Sex",
  shape = "Subject"
)
```

```

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : pseudoinverse used at -0.0069315

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : neighborhood radius 1.1055

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : reciprocal condition number 2.8144e-16

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : There are other near singularities as well. 0.48045

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : pseudoinverse used
## at -0.0069315

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : neighborhood radius
## 1.1055


## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : reciprocal
## condition number 2.8144e-16

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : There are other
## near singularities as well. 0.48045

```

Students' grade-orientation focus set on basis of:  
different years of study, sexes and subjects.

How motivated are students by fear of performing poorly?

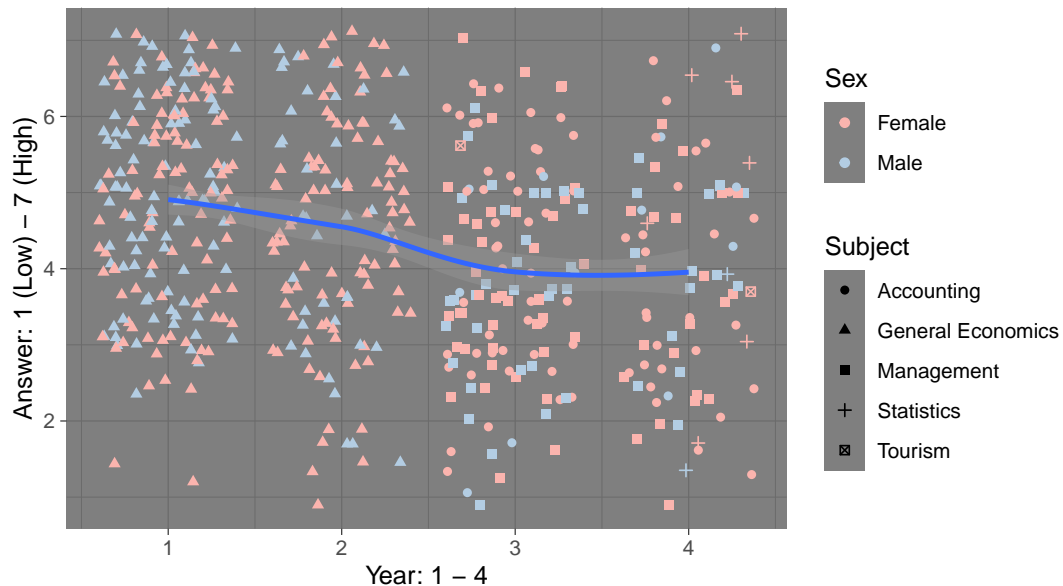

Data source: Elliot, A. J. and McGregor, H. A. (2001)

```
# m3
# Plot mean results of mastery approach questions
# for all students with relation to student's year, sex and subject
# data
d <- ggplot(data = dat, aes(year, mean_dat$m3))
# mapping data (use "jitter" to improve the graph and avoid gridding)
l <- d + geom_jitter(aes(colour = sex, shape = subject))
# smoothing
s <- l + geom_smooth(method = stats::loess, formula = y ~ log(x), se = TRUE)
# adding theme
t <- s + theme_dark()
# adding colouring
c <- t + scale_colour_brewer(palette = "Pastell1")
# adding labels
c + labs(
  title = "Students' focus on understanding set on basis of:
different years of study, sexes and subjects.",
  subtitle = "Prevalence of mastery approach.",
  caption = "Data source: Elliot, A. J. and McGregor, H. A. (2001)",
  x = "Year: 1 - 4",
  y = "Answer: 1 (Low) - 7 (High)",
  colour = "Sex",
  shape = "Subject"
)
```



```

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : pseudoinverse used at -0.0069315

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : neighborhood radius 1.1055

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : reciprocal condition number 2.8144e-16

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : There are other near singularities as well. 0.48045

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : pseudoinverse used
## at -0.0069315

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : neighborhood radius
## 1.1055


## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : reciprocal
## condition number 2.8144e-16

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : There are other
## near singularities as well. 0.48045

```

Students' focus on understanding set on basis of:  
different years of study, sexes and subjects.

Prevalence of mastery approach.

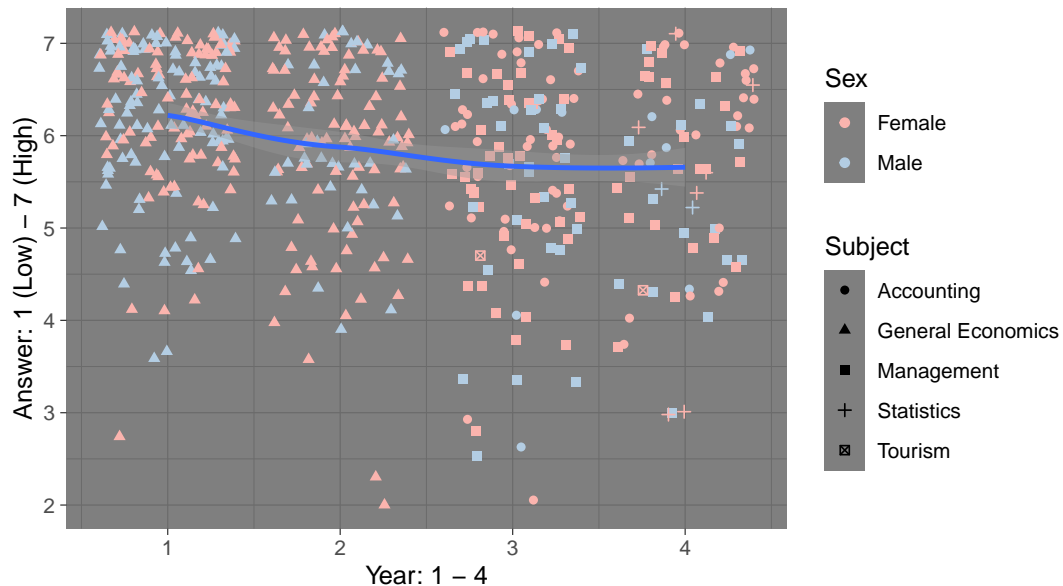

Data source: Elliot, A. J. and McGregor, H. A. (2001)

```
# m4
# Plot mean results of mastery avoidance questions
# for all students with relation to student's year, sex and subject
# data
d <- ggplot(data = dat, aes(year, mean_dat$m4))
# mapping data (use "jitter" to improve the graph and avoid gridding)
l <- d + geom_jitter(aes(colour = sex, shape = subject))
# smoothing
s <- l + geom_smooth(method = stats::loess, formula = y ~ log(x), se = TRUE)
# adding theme
t <- s + theme_dark()
# adding colouring
c <- t + scale_colour_brewer(palette = "Pastell1")
# adding labels
c + labs(
  title = "Students' focus on understanding set on basis of:
different years of study, sexes and subjects.",
  subtitle = "Students' fear of not mastering the course.",
  caption = "Data source: Elliot, A. J. and McGregor, H. A. (2001)",
  x = "Year: 1 - 4",
  y = "Answer: 1 (Low) - 7 (High)",
  colour = "Sex",
  shape = "Subject"
)
```

```

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : pseudoinverse used at -0.0069315

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : neighborhood radius 1.1055

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : reciprocal condition number 2.8144e-16

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : There are other near singularities as well. 0.48045

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : pseudoinverse used
## at -0.0069315

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : neighborhood radius
## 1.1055


## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : reciprocal
## condition number 2.8144e-16

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : There are other
## near singularities as well. 0.48045

```

Students' focus on understanding set on basis of:  
different years of study, sexes and subjects.

Students' fear of not mastering the course.

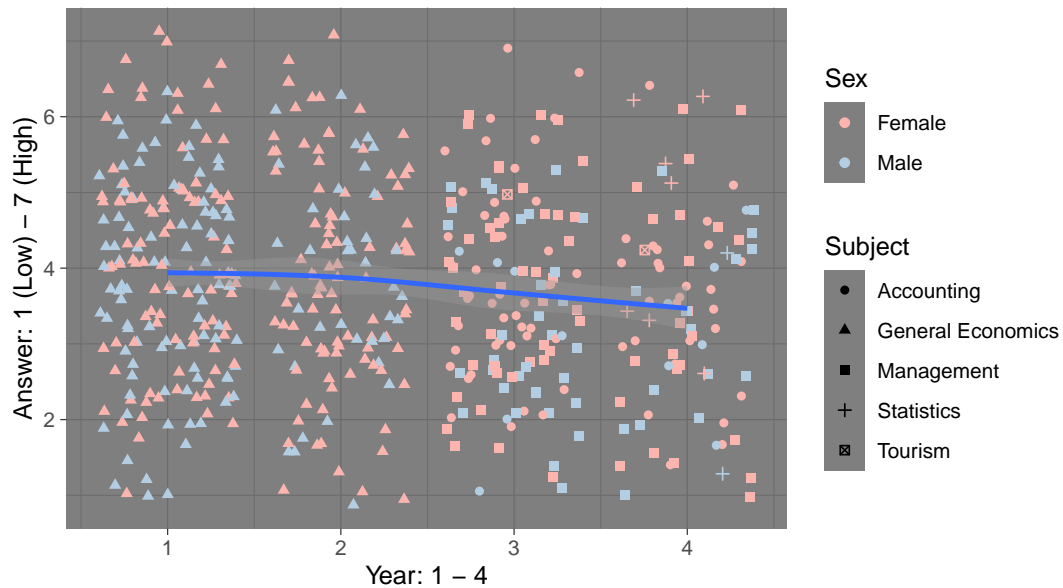

Data source: Elliot, A. J. and McGregor, H. A. (2001)

```
# interest
# Plot mean results of course interestedness expectations questions
# for all students with relation to student's year, sex and subject
# data
d <- ggplot(data = dat, aes(year, mean_dat$m_interest))
# mapping data (use "jitter" to improve the graph and avoid gridding)
l <- d + geom_jitter(aes(colour = sex, shape = subject))
# smoothing
s <- l + geom_smooth(method = stats::loess, formula = y ~ log(x), se = TRUE)
# adding theme
t <- s + theme_dark()
# adding colouring
c <- t + scale_colour_brewer(palette = "Pastell1")
# adding labels
c + labs(
  title = "Students' course interestedness expectations set on basis of:
different years of study, sexes and subjects.",
  subtitle = "\"I expect my courses this semester to be very interesting\"",
  caption = "Data source: Elliot, A. J. and McGregor, H. A. (2001)",
  x = "Year (1-4)",
  y = "Expectations: 1 (Low) - 7 (High)",
  colour = "Sex",
  shape = "Subject"
)
```

```

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : pseudoinverse used at -0.0069315

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : neighborhood radius 1.1055

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : reciprocal condition number 2.8144e-16

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : There are other near singularities as well. 0.48045

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : pseudoinverse used
## at -0.0069315

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : neighborhood radius
## 1.1055


## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : reciprocal
## condition number 2.8144e-16

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : There are other
## near singularities as well. 0.48045

```


Students' course interestedness expectations set on basis of:  
different years of study, sexes and subjects.

'I expect my courses this semester to be very interesting'

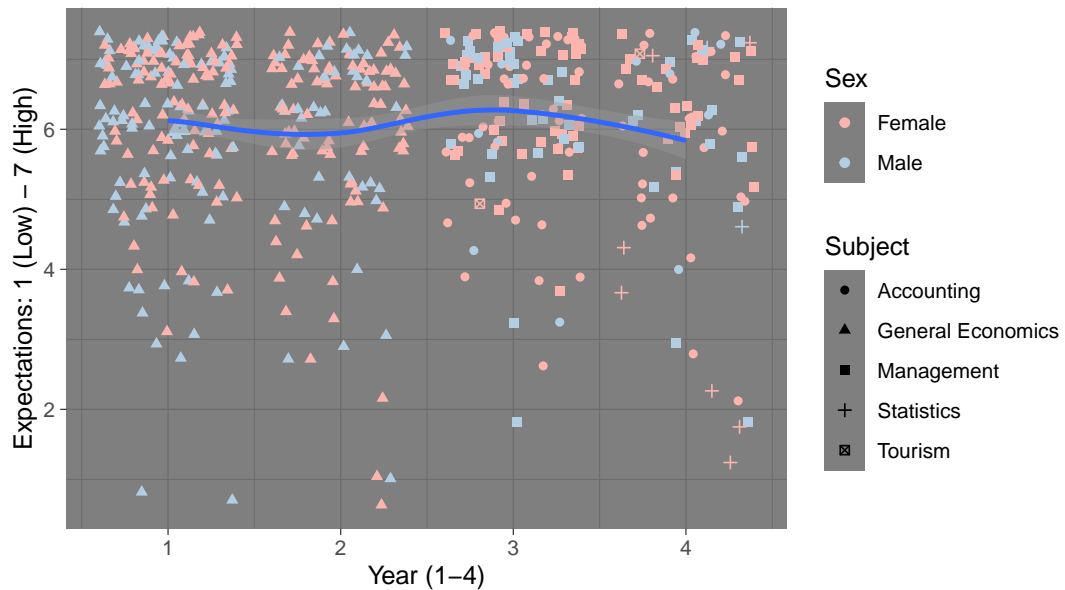

Data source: Elliot, A. J. and McGregor, H. A. (2001)

```
# chi-squared
chi_sqrt <- ggplot(data = dat, aes(year, mean_dat$m_interest)) +
  stat_function(fun = dchisq, args = list(df = 8))
chi_sqrt
```

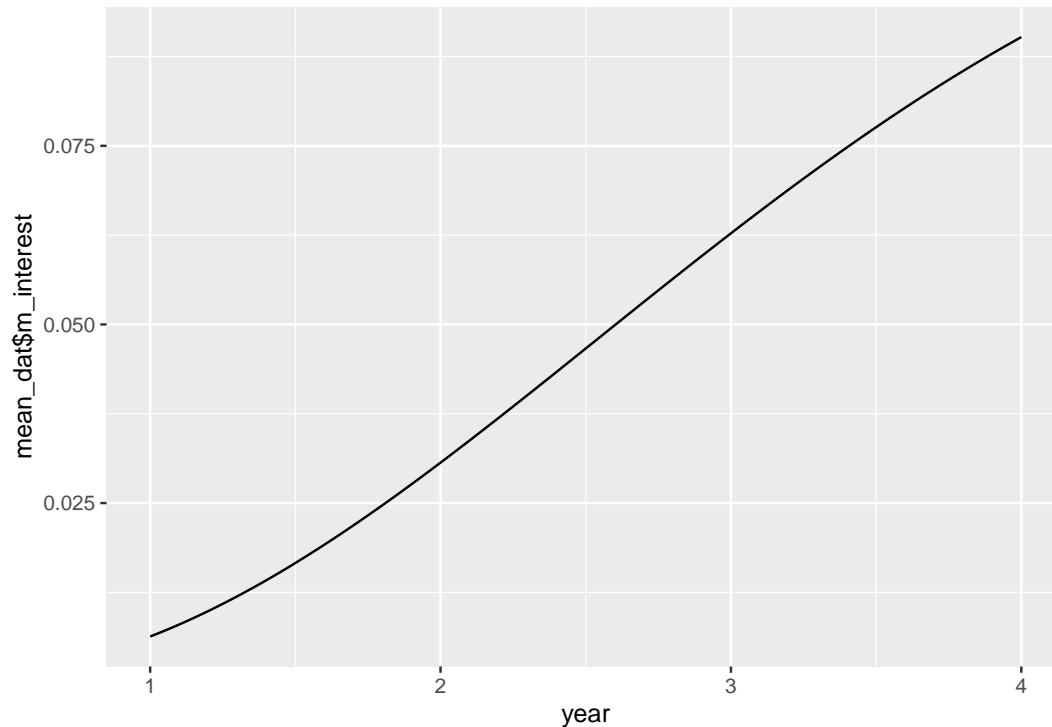

```
# enjoy
# Plot mean results of course enjoyment expectations questions
# for all students with relation to student's year, sex and subject
# data
d <- ggplot(data = dat, aes(year, mean_dat$m_enjoy))
# mapping data (use "jitter" to improve the graph and avoid gridding)
l <- d + geom_jitter(aes(colour = sex, shape = subject))
# smoothing
s <- l + geom_smooth(method = stats::loess, formula = y ~ log(x), se = TRUE)
# adding theme
t <- s + theme_dark()
# adding colouring
c <- t + scale_colour_brewer(palette = "Pastel1")
# adding labels
c + labs(
  title = "Students' course enjoyment expectations set on basis of:
different years of study, sexes and subjects.",
  subtitle = "'I expect my courses this semester to be very enjoyable'",
  caption = "Data source: Elliot, A. J. and McGregor, H. A. (2001)",
  x = "Year (1-4)",
  y = "Expectations: 1 (Low) - 7 (High)",
  colour = "Sex",
  shape = "Subject"
)
```

```

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : pseudoinverse used at -0.0069315

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : neighborhood radius 1.1055

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : reciprocal condition number 2.8144e-16

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : There are other near singularities as well. 0.48045

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : pseudoinverse used
## at -0.0069315

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : neighborhood radius
## 1.1055

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : reciprocal
## condition number 2.8144e-16


## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : There are other
## near singularities as well. 0.48045

```



Students' course enjoyment expectations set on basis of:  
different years of study, sexes and subjects.

'I expect my courses this semester to be very enjoyable'

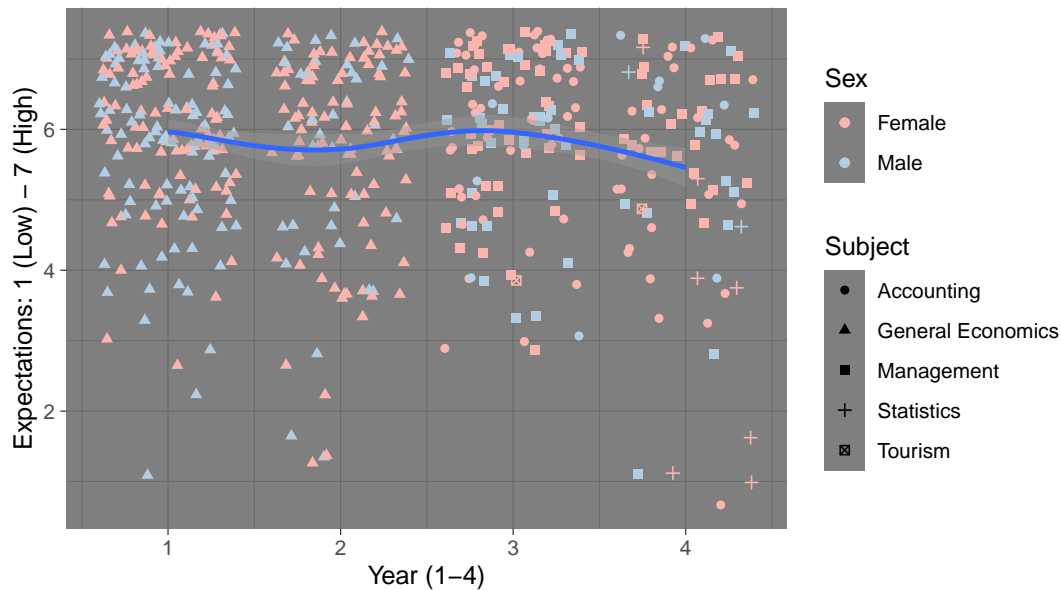

Data source: Elliot, A. J. and McGregor, H. A. (2001)

```
# mastgrad
# Plot mean results of (Primarily understanding/Equal Importance/Primarily grades)scale
# for all students with relation to student's year, sex and subject
# data
d <- ggplot(data = dat, aes(year, mean_dat$m_mastgrad))
# mapping data (use "jitter" to improve the graph and avoid gridding)
l <- d + geom_jitter(aes(colour = sex, shape = subject))
# smoothing
s <- l + geom_smooth(method = stats::loess, formula = y ~ log(x), se = TRUE)
# adding theme
t <- s + theme_dark()
# adding colouring
c <- t + scale_colour_brewer(palette = "Pastell1")
# adding labels
c + labs(
  title = "Students' importance scale between understanding and grades set on basis of:
different years of study, sexes and subjects.",
  subtitle = "Scale: Primarily understanding (1) / Equal Importance (4) / Primarily grades (7)",
  caption = "Data source: Elliot, A. J. and McGregor, H. A. (2001)",
  x = "Year (1-4)",
  y = "Scale: 1 (Understanding) - 4 (Equal) - 7 (Grades)",
  colour = "Sex",
  shape = "Subject"
)
```

```

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : pseudoinverse used at -0.0069315

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : neighborhood radius 1.1055

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : reciprocal condition number 2.8144e-16

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric =
## parametric, : There are other near singularities as well. 0.48045

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : pseudoinverse used
## at -0.0069315

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : neighborhood radius
## 1.1055


## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : reciprocal
## condition number 2.8144e-16

## Warning in predLoess(object$y, object$x, newx = if
## (is.null(newdata)) object$x else if (is.data.frame(newdata))
## as.matrix(model.frame(delete.response(terms(object))), : There are other
## near singularities as well. 0.48045

```

Students' importance scale between understanding and grades set on basis different years of study, sexes and subjects.

Scale: Primarily understanding (1) / Equal Importance (4) / Primarily grades (7)

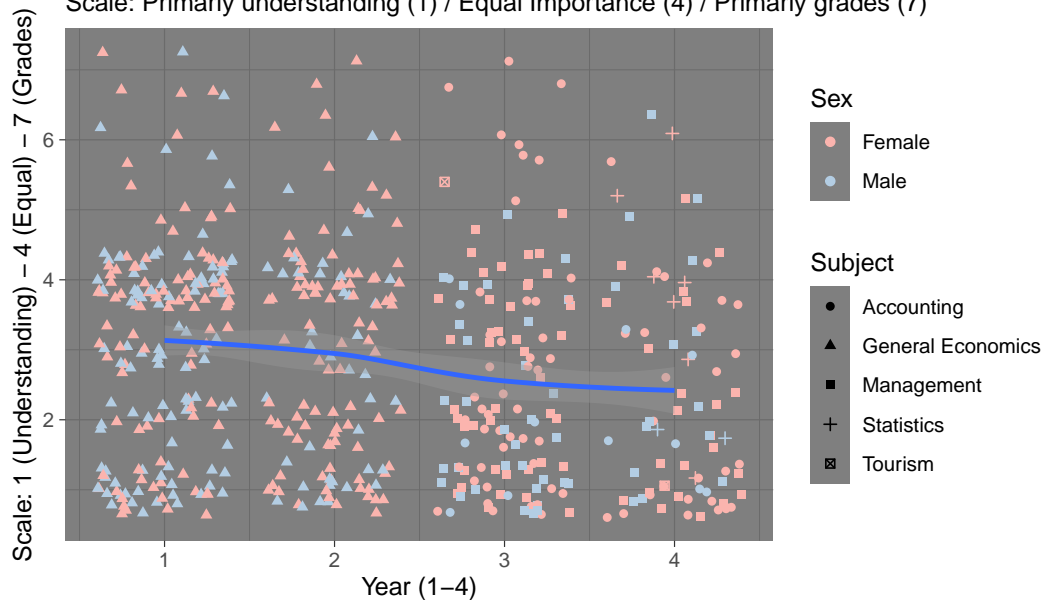

Data source: Elliot, A. J. and McGregor, H. A. (2001)

```
## CLASSIFICATION #####
# dat_tibble %>%
#   head() %>%
#   knitr::kable()

# get only answers that are greater or equal to 5
dat_tibble_m1 <- filter(dat_tibble, m1 >= 5)

n_m1 <- tally(dat_tibble_m1) # 212
beta <- n_m1 / n # 0.3392

ci <- beta * ((1 - beta)/(n)) # 0.0003586294
ci_sqrt <- sqrt(ci) # 0.0189
ci_margin_error <- ci_sqrt * 1.96 # 0.0371 or 3.71%

# Our 95% confidence interval for the percentage of times we will get a student with a mean of
# 5 or above for the set of m1 questions is 0.3392 (or 34%), plus or minus 0.03711 (or 3.7%).
# The lower end of the interval is 0.3392 - 0.03711 which is:
lower_end_of_interval <- beta - ci_margin_error # 0.3020825 or 30%
# The upper end of the interval is 0.3392
upper_end_of_interval <- beta + ci_margin_error # 0.3763175 or 37%

# To interpret these results we could say that with 95% confidence the percentage of the times
# we should expect to find a student with a mean score of 5 or above to m1 is somewhere
```

*# between 30% and 37%, based on our sample.*  
#####