
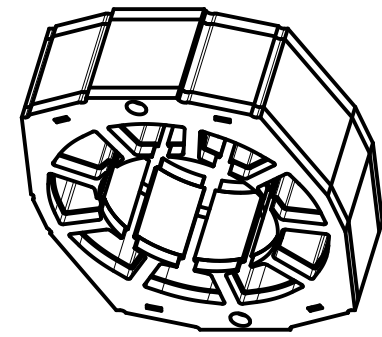
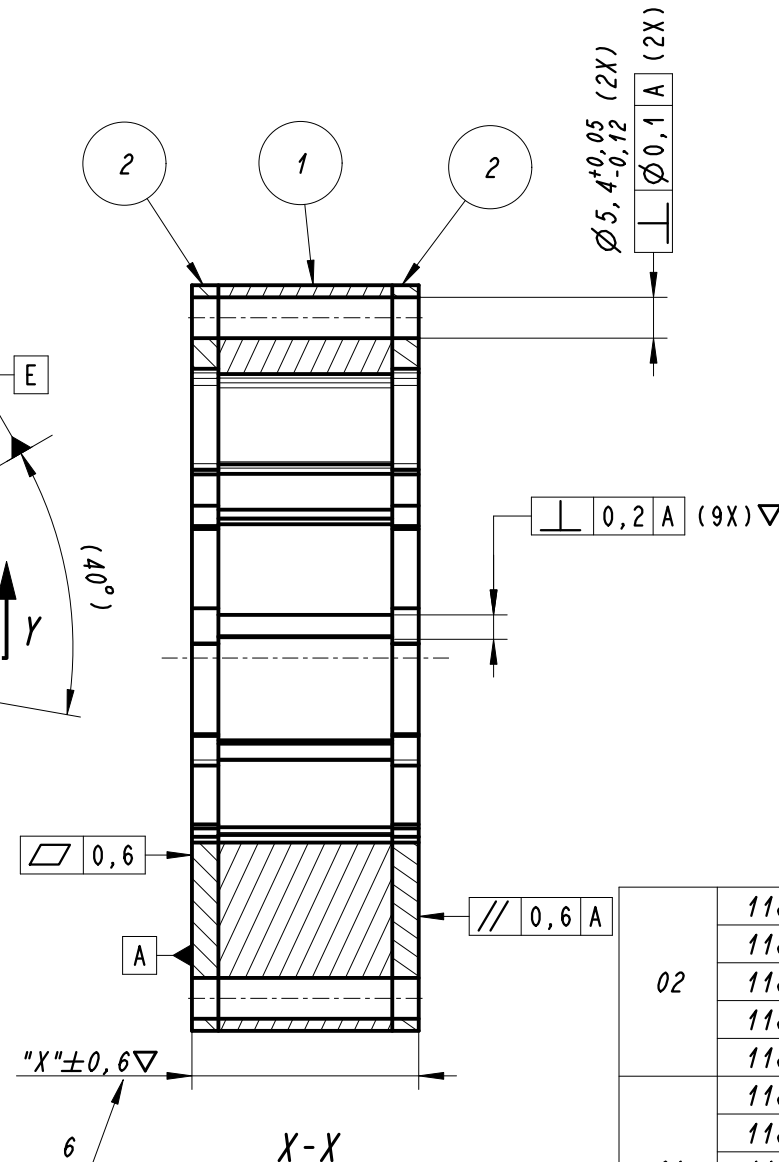


E
D
C
B
A

ECM	REVISION	LO	BY	DATE
---	REMOVED CODE 218023007. TOLERANCE WAS $\pm 0,1$. CHANGED MATERIAL.	TAB. D3	FHS	2020.FEB.04
---	3. $5 \pm 0,8$ WAS 3. 5 INCL. CODE 218023007 INCL. NOTE 7	E5 TAB.	IND	2020.APR.16
---	REMOVED ∇ FROM	C6	IND	2020.APR.16
CR18314 01	INCLUDED LAMINATIONS: 118043011 / 118043012 UPDATED STACK MATERIAL: 218023007	TAB. IND	---	---
CR22814 02	INCL. LAM. 118043013/3014 INCL. CODE 218023016 INCL. STACK CODES: 218023014 218023015	TAB. EDD	---	---
CR24561 03	REMOVED STACK CODES: 218023004 218023007	TAB. EDD	---	---
CR27815 04	INCL. CODE 218023017	TAB. TIVA	---	---
CR31833 05	ADDED NOTE 8	NOTE DSR	---	---

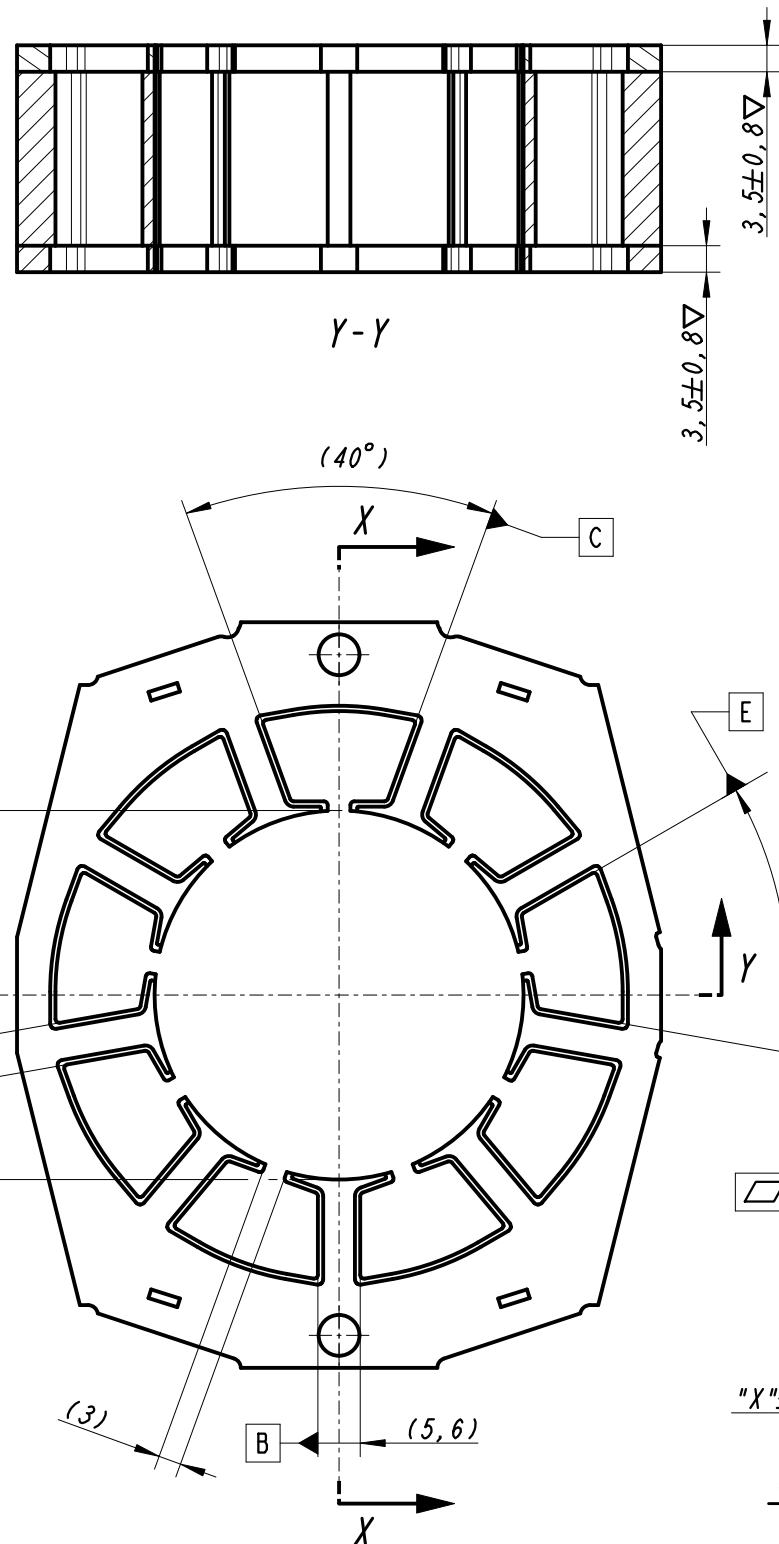

1:2

- NOTES:
- 1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
 - 2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH $\nabla \nabla \oplus$, SEE TSS 002470.
 - 3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420. $\oplus$
 - 4 - HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369. ∇
 - 5 - SUGGESTION AREA TO INTERLOCK POSITION.
 - 6 - HEIGHT MEASUREMENT WITH FORCE MINIMUM 6 TON.
 - 7 - AFTER STAMPING, THE LAMINATION MUST BE SUBJECTED TO STRESS-RELIEF ANNEALING AT 810°C WITH A NON-OXIDIZING ATMOSPHERE.
 - 8 - FOR STATOR WITH A STACK HEIGHT OF 30 mm ($X = 30 \pm 0,6$ mm), THE VALID PERPENDICULARITY TOLERANCE IS: $\perp 0,2 A$

			STACK CODE					
			218023017	218023002	218023014	218023015	218023008	218023016
DIMENSION "X"			30,0	20,0	15,5			
02	118043014	60900	-	-	-	-	-	X
	118043012	U230	-	-	X	-	-	-
	118043009	50CS1300	-	-	-	-	X	-
	118043008	E145	-	-	-	X	-	-
	118043007	E125	X	X	-	-	-	-
01	118043013	60900	-	-	-	-	-	X
	118043011	U230	-	-	X	-	-	-
	118043006	50CS1300	-	-	-	-	X	-
	118043005	E145	-	-	-	X	-	-
	118043004	E125	X	X	-	-	-	-
POS.	CODE	MATERIAL	LAMINATION TYPE					
			FMS-2					
			FMS-1					
MATERIAL :			NON GRAIN ORIENTED ELECTRICAL STEEL					
CODE :								
DRAWN :			EMERSON MOREIRA					
APP. :			TIAGO STAUDT					
ECM :			CR01452					
DATE :			2018.DEC.14					
			THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO, AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION					
			GEN. TOL. : $\pm 0,5$					
			ANG. TOL. : $\pm 1^\circ$					
			SCALE : 1:1					
			UNIT: mm A3					
			REPLACE:					
			No. 218023000					
			SHEET NUMBER: 1 OF 1					

embraco
Nidec

STATOR - STACK