TroubleShooting - Deployment Issues

Created by Johnson, Maurice, last modified about 2 hours ago

Scope of Page

Provides the EIS Team Resources the means for tracking Deployment Issues and their designated Resolutions.

Deployment Issues

	Deployment Issue	Description	Log Example / Observation	Resolution Link
1	Mussel Build Vended Docker Image Error W/O Cataloging it First	Deployment Pipeline fails with a Mussel Error. The Vended Docker Image has not been Catalogued against the EIS Project Barometer IT ID Number.	**Error**: Image eis-central-remote.artifactory.allstate.com/ab-cssr-app:b401dd11 cannot be associated to a non-vended application built with Mussel. Potential Solution: Please use Mussel to either catalog your vended image or build your custom image. Docs can be found here: https://github.com/IS-COMPOZED-DEPLOYER/mussel/wiki/Mussel-Documentation	Catalogue A New Vended Docker Image
2	Kubernetes Namespace Pods are not properly purged or flushed.	The Deployment Pipelines themselves have a Clean-Up Step/Jenkins Pipeline Stage that allows for the purging of each Docker Image Containers or in the Kubernetes World Pods. it has been observed that either at time of Deployment Failure or during Deployment Failure that the clean-up either completes successfully or is missed/skipped. The following will allow the cleanup of those Kubernetes Namespace Pods.	Presently it is an observation within the "***KUBECTL***" Client after executing the following command line statement (Unique to Kubernetes Namespace - example follows) kubectl get pods -n ab-eis (this is for dev) kubectl get pods -n ab-eis-int kubectl get pods -n ab-eis-uat kubectl get pods -n ab-eis-staging kubectl get pods -n ab-eis-dev1 kubectl get pods -n ab-eis-dev2 kubectl get pods -n ab-eis-commit kubectl get pods -n ab-eis-manualtest	Kubernetes Namespace Pod Cleanup

	Deployment Issue	Description	Log Example / Observation	Resolution Link
3	ZooKeeper and or SoLR Fail at the Core Dependency Configurations	The failure simply states a Completed with a Status of Failure. Upon drilling down to the "ab-eis-genesis-configmap-deployer" build logs, it logs a secondary error message stating it "Failed to allocate a service IP Address", that the range was full. In other words, blocks of IP Addresses are allocated for our Kubernetes Subnet Cluster. Our application has currently consumed all IP Addresses that are currently allocated. The resolution is allocate another block of IP Addresses.	**Error**: `AB-EIS » core-dependency » ab-eis-genesis-configmap-deployer completed with status FAILURE (propagate: false to ignore)` Internal error occurred: failed to allocate a serviceIP: range is full	Reach out to **CaaS Group Members:** • *Kathy Maher,* • *Achuthankutty Pramod,* • *Charles Quinn IV,* • *Stephen Snow* Request the allocation of another block of IP Addresses for our Kubernetes Subnet Cluster. **(202100817) CaaS Group Response:** I've let the Platform team know - will let you know what options we have when we find out. ***In the meantime hopefully you can delete any pods that aren't being actively used to free up their resources for others that are!***
4				

Resolutions to Deployment Issues

Issue: Mussel Build Vended Image W/O Cataloging it First - Resolution Steps Follow

Step	Step Name	Step Description	Comments
1	Open POSTMan Utility	Postman is an API platform for building and using APIs. It can also be leveraged to SUBMIT the following HTTP Method Types (*POST, PUT, GET, DELETE*) plus many more. These are simply the most commonly used. If you do not have POSTMan, please navigate to the "Allstate Software Center" and download the latest version(Refence the Screenshot within the Comments Column)	

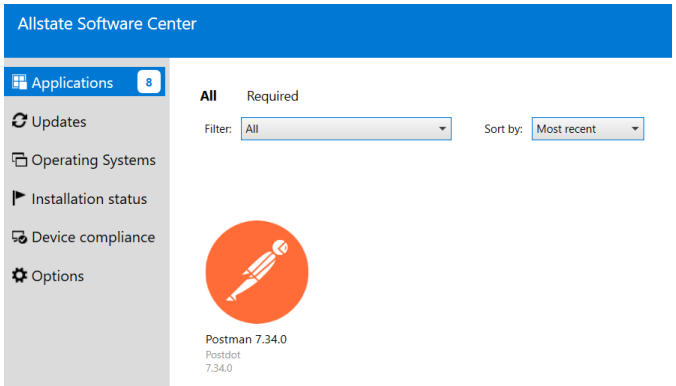

2	Create a New HTTP Request	Within POSTMan, Either Click the **New** Button or the **+** Button found within your POSTMan's Workspace. Also depicted within the Screenshot of the PostMan Header Below; 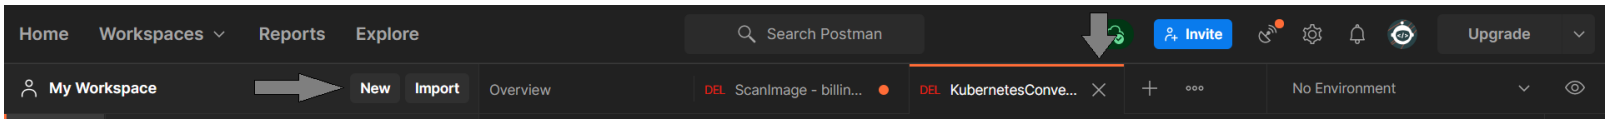
3	Update the HTTP Method to "**POST**"	Select "**POST**" from the HTTP Method Dropdown as shown in the Screen Shot that follows; 
4	Update the HTTP Request URL	Update the Request URL to the following Allstate's Kubernetes Conveyor URL dedicated to the EIS Project; https://mussel.apps.csts-eks-pr-modr-1.caas.allstate.com/api/v1/catalog-image 
5	Update the HTTP Request Title	Update the HTTP Request Title, to anything you wish. It would be nice to be able to save this POSTMAN HTTP Request for Future Reference(Reference the Screen Shot Below). Dont be afraid to click the **Save** Button as many time as you wish. Also it may ask you to save it to a "Collection". This is simply Unique to POSTMAN, and all you must do is provide a Collection Name and Click Save.
6	Create your HTTP Request Authorization	Navigate to the "**Authorization**" Tab as shown in the Screen Shot Below. Enter your Allstate **NTID** & **Password** . Also make certain that the "**Type**" of Authorization is "Basic Authorization". Also shown below. As always do not forget to click the **Save** button.

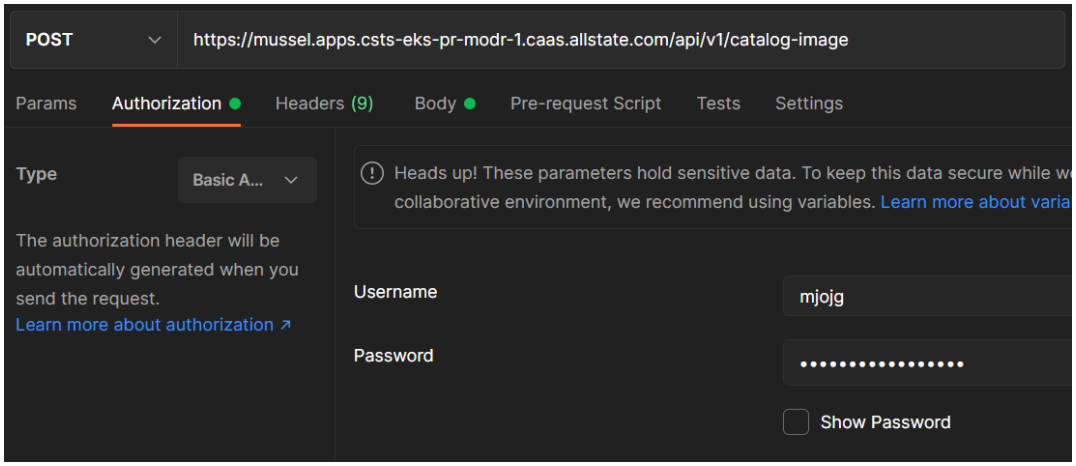

7	Navigate to the HTTP Request Body Tab	Navigate to the HTTP Request Body Tab as shown in the screen shot below. 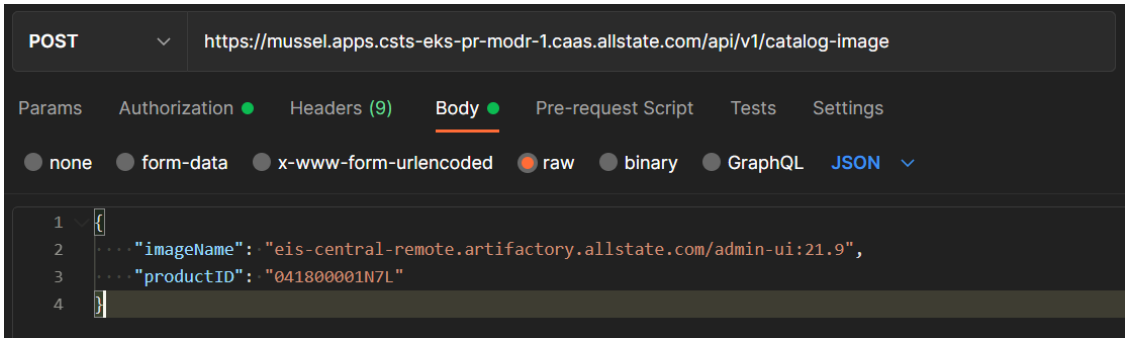
8	Update the following Text with your Application Docker Image Name	The following code snippet, ***found within the Collapsible Code Block Below***, is specific to the "admin-ui" docker image name and it's tag. Dependent upon what Docker Image you are working with and it's designated tag you will wish to alter these specific to your needs. Expand source
9	Update your HTTP Request Body	Cut and Paste the previously altered Code Snippet, from **Step #8**, and paste it into the HTTP Request Body. It should resemble something similar to the screen shot below. Take note the Body "**Type**" is considered "**Raw**" and that is ok. As always Dont forget to Click the Button. And example can be seen in **Step #7**
10	If you have not already done So, Click the  Button.	I know, Im crazy about that Save Button.
11	Send the HTTP Request to Allstate Conveyor	Click the  Button. This will submit the **HTTP DELETE REQUEST** against the Allstate Conveyor, for Kubernetes, and process the request. An average this will take under a minute at most two minutes.
12	Validate Successful Completion of	This can be accomplished one of two ways. The easiest is that upon Success, Conveyor will return a Server HTTP RESPONSE Status of 200. Which dictates Success. This is shown below.

	the HTTP POST REQUEST	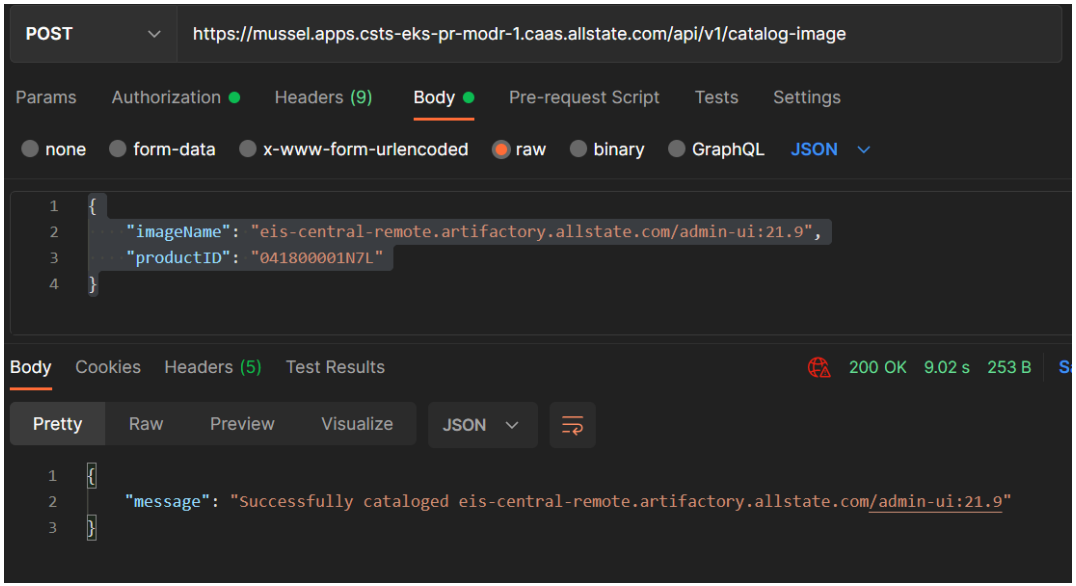	
14	Next Steps...	This truly is dependent upon where the failure occurred. If the Deployment Failure Occurred either within the **Core-Dependency** and OR the **Static Reference Components**. You will have to "**Abort**" the remaining Deployment Stages, perform the Kubernetes Namespace Pod Cleanup, and schedule a Redeployment of the Orchestration Pipeline. If however you are fortunate, and the Deployment Error occurs within the **Base Components,** simply schedule a re-deployment for the individual Components that failed. If unsure, reference the User Manual Introduction Section for a Sequence or Order of Precedence for Docker Image Deployments. There could be Docker Deployment Dependencies. For example both "**Admin-UI**" and "**Cssr-App**" will require the redeployment of "**Dxp-gateway**", because they dependencies upon it.	

Issue: Kubernetes NameSpace Pod Cleanup - Resolution Steps Follow

Step	Step Name	Step Description	Comments
1	Open POSTMan Utility	Postman is an API platform for building and using APIs. It can also be leveraged to SUBMIT the following HTTP Method Types (*POST, PUT, GET, DELETE*) plus many more. These are simply the most commonly used. If you do not have POSTMan, please navigate to the "Allstate Software Center" and download the latest version(Refence the Screenshot within the Comments Column) 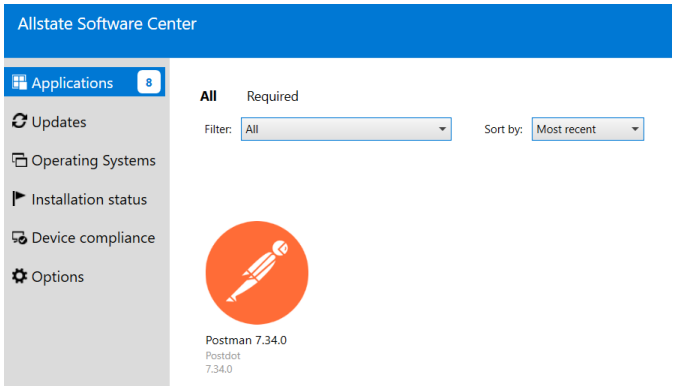	
2	Create a New HTTP Request	Within POSTMan, Either Click the  Button or the Button found within your POSTMan's Workspace. Also depicted within the Screenshot of the PostMan Header Below;	

		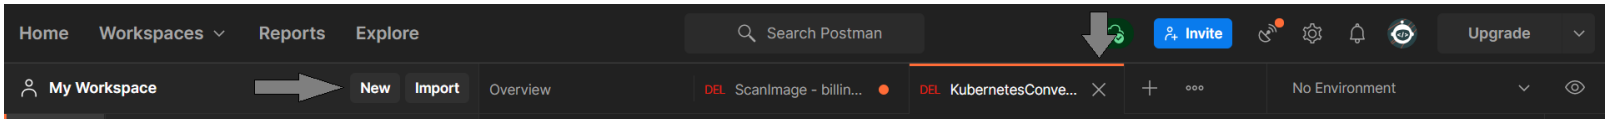
3	Update the HTTP Method to "**DELETE**"	Select "**Delete**" from the HTTP Method Dropdown as shown in the Screen Shot that follows; 
4	Update the HTTP Request URL	Update the Request URL to the following Allstate's Kubernetes Conveyor URL dedicated to the EIS Project; https://conveyor.mgmt.allstate.com/v1/kubernetes/apps/caas-tkgi-nonprod/ab-eis 
5	Update the HTTP Request Title	Update the HTTP Request Title, to anything you wish. It would be nice to be able to save this POSTMAN HTTP Request for Future Reference(Reference the Screen Shot Below). Dont be afraid to click the  Button as many time as you wish. Also it may ask you to save it to a "Collection". This is simply Unique to POSTMAN, and all you must do is provide a Collection Name and Click Save.
6	Create your HTTP Request Authorization	Navigate to the "**Authorization**" Tab as shown in the Screen Shot Below. Enter your Allstate **NTID** & **Password** . Also make certain that the "**Type**" of Authorization is "Basic Authorization". Also shown below. As always do not forget to click the  button. 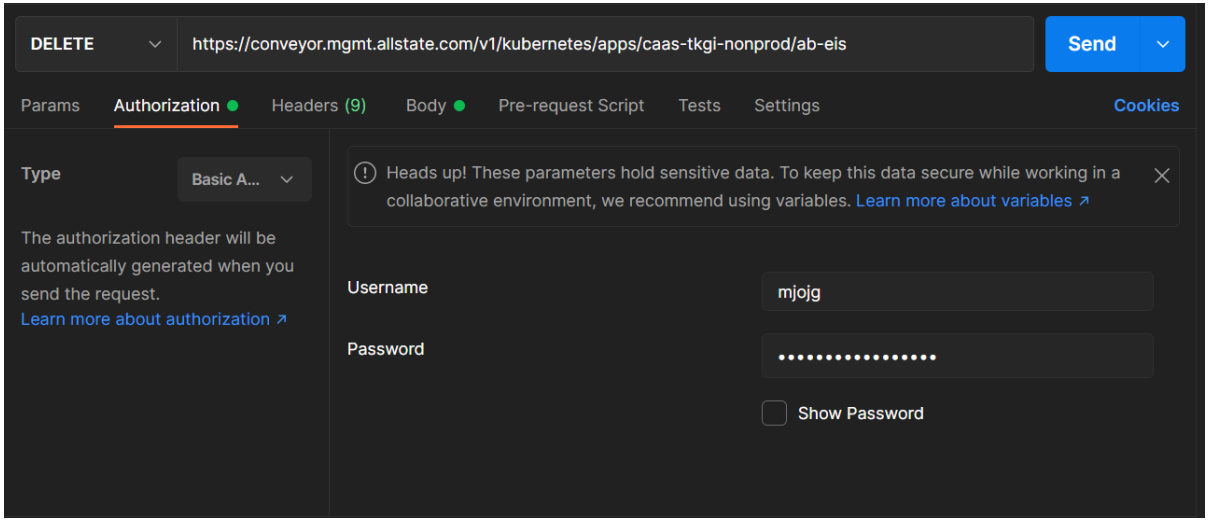
7	Navigate to the HTTP Request Body Tab	Navigate to the HTTP Request Body Tab as shown in the screen shot below.

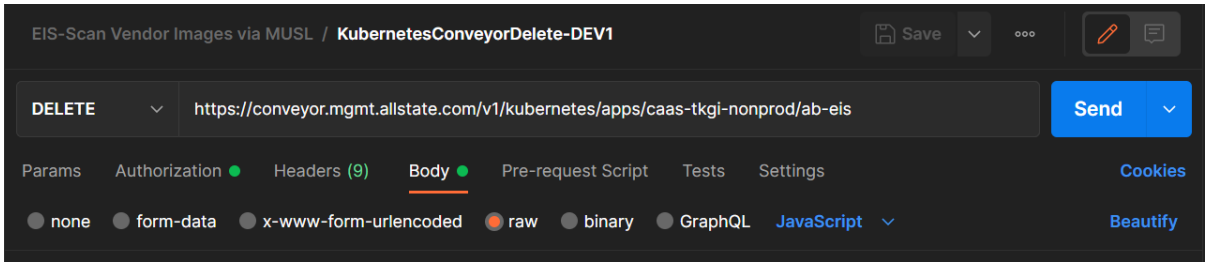

8	Update the following Text with your Kubernetes Namespace	The following code snippet, ***found within the Collapsible Code Block Below***, is specific to the "DEV1" Kubernetes Namespace. Dependent upon where your Deploy Failure took place. You will need to update the code snippet with that Kubernetes Namespace. ***(ie: dev1, dev, int, uat, staging et cetera)*** Expand source	
9	Update your HTTP Request Body	Cut and Paste the previously altered Code Snippet, from **Step #8**, and paste it into the HTTP Request Body. It should resemble something similar to the screen shot below. Take note the Body "**Type**" is considered "**Raw**" and that is ok. As always Dont forget to Click the Save Button. 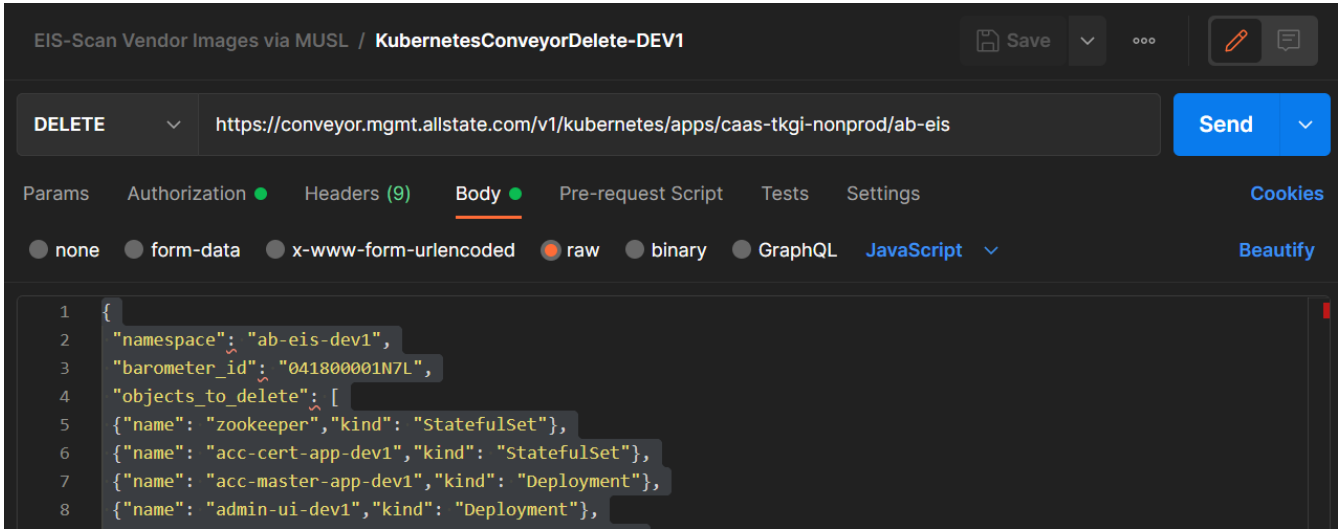 	
10	If you have not already done So, Click the Save Button.	I know, Im crazy about that Save Button.	
11	Send the HTTP Request to Allstate Conveyor	Click the Send Button. This will submit the **HTTP DELETE REQUEST** against the Allstate Conveyor, for Kubernetes, and process the request. An average this will take under a minute at most two minutes.	
12	Validate Successful Completion of the HTTP DELETE REQUEST	This can be accomplished one of two ways. The easiest is that upon Success, Conveyor will return a Server HTTP RESPONSE Status of 200. Which dictates Success. This is shown below. The other is to leverage the Command Line "**KUBECTL**" CLI. This is left for a later time however. POSTMan Validation should be sufficient.	

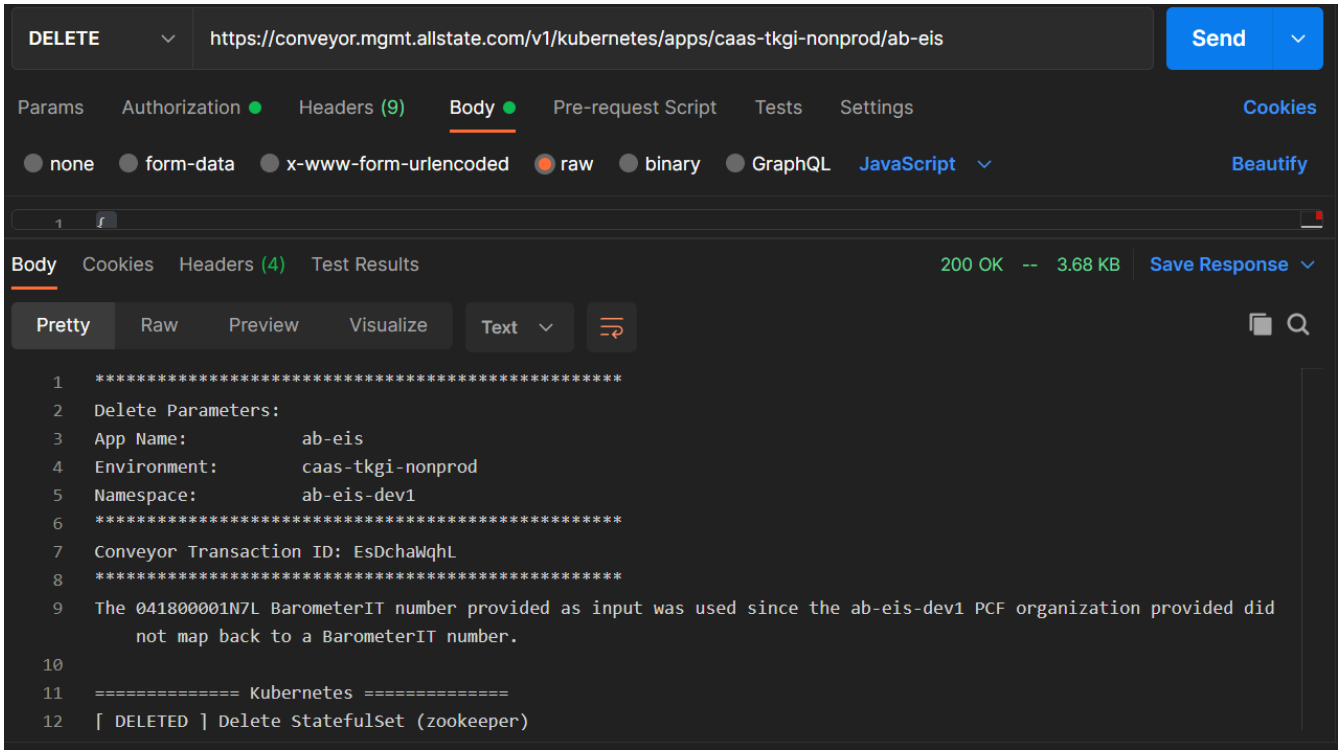
DELETE
https://conveyor.mgmt.allstate.com/v1/kubernetes/apps/caas-tkgi-nonprod/ab-eis
Send
Params
Authorization
Headers (9)
Body
Pre-request Script
Tests
Settings
Cookies
none
form-data
x-www-form-urlencoded
raw
binary
GraphQL
JavaScript
Beautify
Body
Cookies
Headers (4)
Test Results
200 OK -- 3.68 KB
Save Response
Pretty
Raw
Preview
Visualize
Text
****
Delete Parameters:
App Name: ab-eis
Environment: caas-tkgi-nonprod
Namespace: ab-eis-dev1
****
Conveyor Transaction ID: EsDchaWqhL
****
The 041800001N7L BarometerIT number provided as input was used since the ab-eis-dev1 PCF organization provided did not map back to a BarometerIT number.
========== Kubernetes ==========
[DELETED] Delete StatefulSet (zookeeper)

No labels