log3

ALL SUBJ NEW RANGE AND LN DC-COV

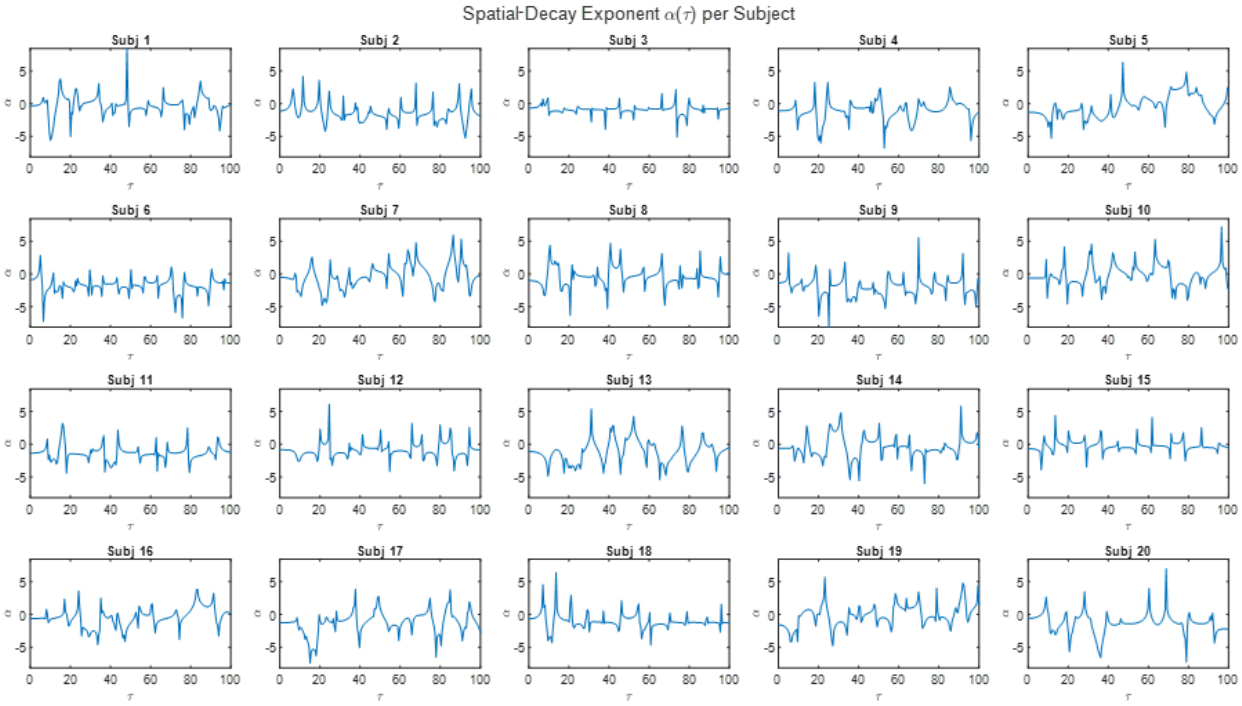

ALL SUBJ NEW RANGE AND LN FULL MATRIX

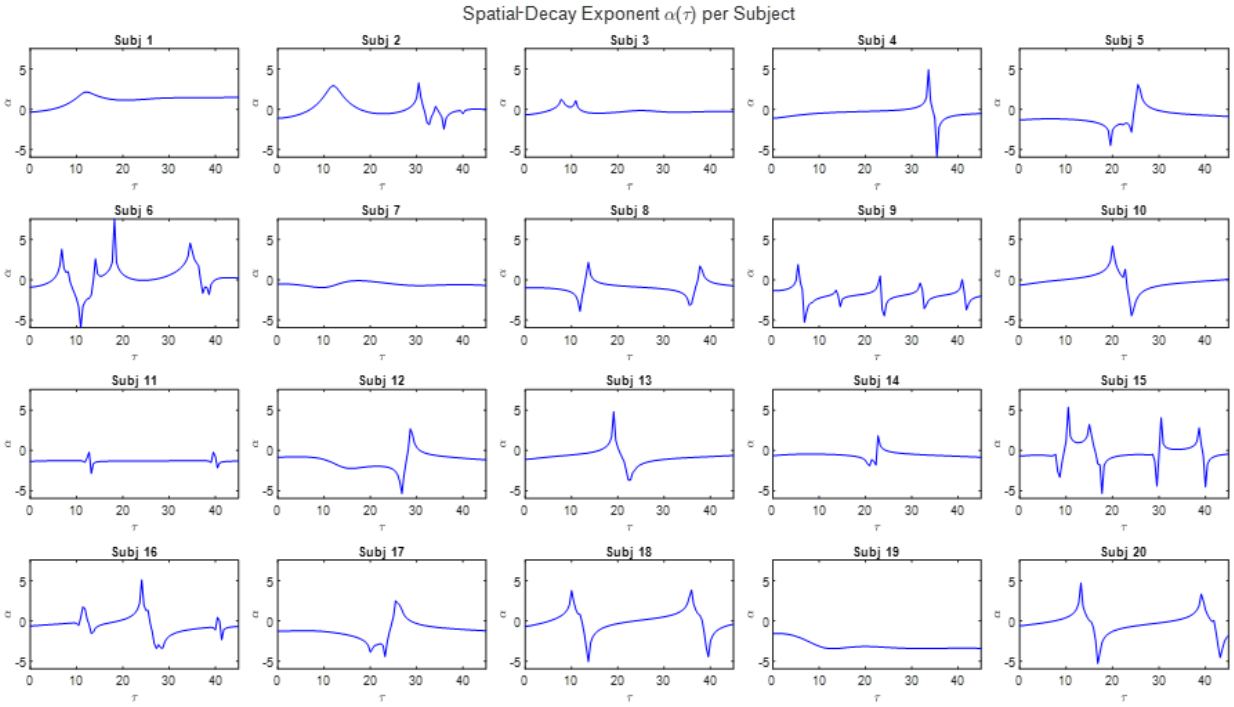

Different ranges:

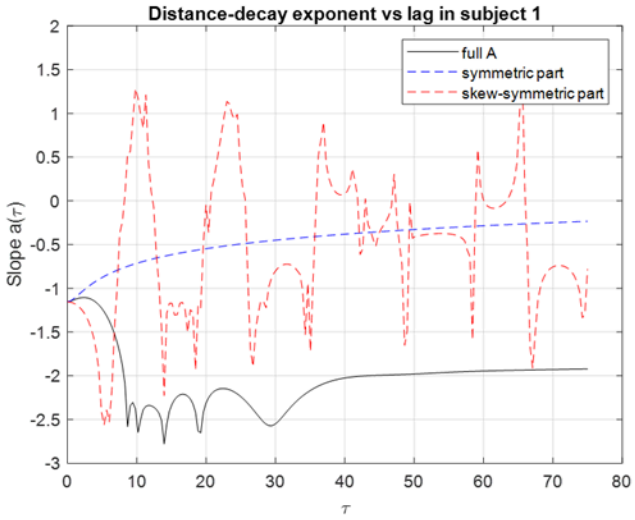

[8.13 33.82]

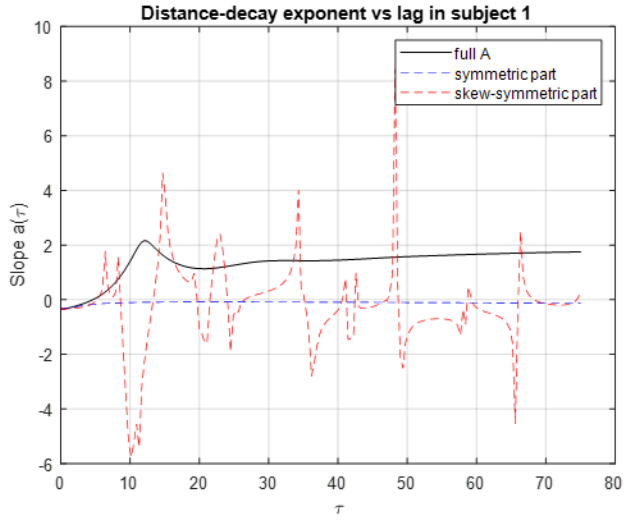

[4.48, 12.18]

Problem with shorter range for single node.

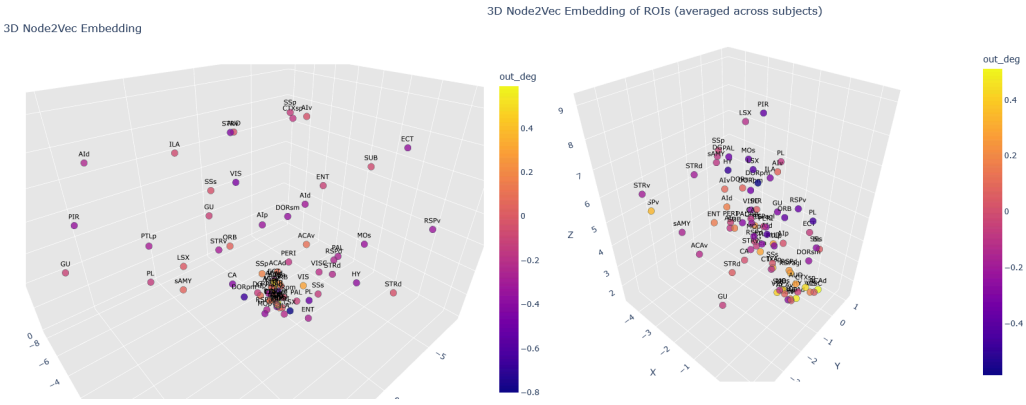

Node embeddings wrt effective connectivity A. Interesting to analyze what type of information encodes an unsupervised learning technique forced to compress graph structure in a three-dimensional embedding space:

- **Proximity**: Co-occurrence in random walks i.e. any two regions that freuently appear near one another along directed wandom-walk paths end up close in Euclidean space. These paths respect the arrow of influence, therefor eembedding proximity reflects similarity in both "who you send signals to" and "who you receive signals from". Regions that have similar patterns of incoming and outgoing connections will cluster together. Hence, clutsers capturing functional roles.
- **Color**: Color encodes for out-degree (summing across columns of each row). High out-degree implies that a region projects strongly to man others. Often found on periphery because distinct walk-profiles. Lower out-degree implies more constrained projections, hence tight clusters. Warmest occupy different subspaces from coolest, hence sensitivity to directional influence. Averaged less tight since low-pass.

It will be interesting to see how the embeddings translate to when considering only dC-Cov instead the full A matrix.