
Apache2 Install and status

```
rmavani@LAPTOP-RD44A66A:/etc/nginx/sites-enabled$ sudo systemctl status ap
apache-htcacheclean.service  apport-autoreport.path       apport-forward.socket        apt-daily-upgrade.timer      apt-news.servic
apache2.service              apport-autoreport.service    apport.service               apt-daily.service
apparmor.service             apport-autoreport.timer      apt-daily-upgrade.service    apt-daily.timer
rmavani@LAPTOP-RD44A66A:/etc/nginx/sites-enabled$ sudo systemctl status apache2
● apache2.service - The Apache HTTP Server
     Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled)
     Active: active (running) since Fri 2026-09-18 15:08:36 CEST; 28s ago
 Invocation: 4b4a38288ce24d6e89eb94f93f32efb6
       Docs: https://httpd.apache.org/docs/2.4/
   Main PID: 3665 (apache2)
     Status: "Total requests: 0; Idle/Busy workers 100/0;Requests/sec: 0; Bytes served/sec:   0 B/sec"
      Tasks: 55 (limit: 9161)
     Memory: 7.7M (peak: 8.5M)
        CPU: 125ms
     CGroup: /system.slice/apache2.service
             ├─3665 /usr/sbin/apache2 -k start -DFOREGROUND
             ├─3681 /usr/sbin/apache2 -k start -DFOREGROUND
             └─3682 /usr/sbin/apache2 -k start -DFOREGROUND

Sep 18 15:08:35 LAPTOP-RD44A66A systemd[1]: Starting apache2.service - The Apache HTTP Server...
Sep 18 15:08:36 LAPTOP-RD44A66A systemd[1]: Started apache2.service - The Apache HTTP Server.
```

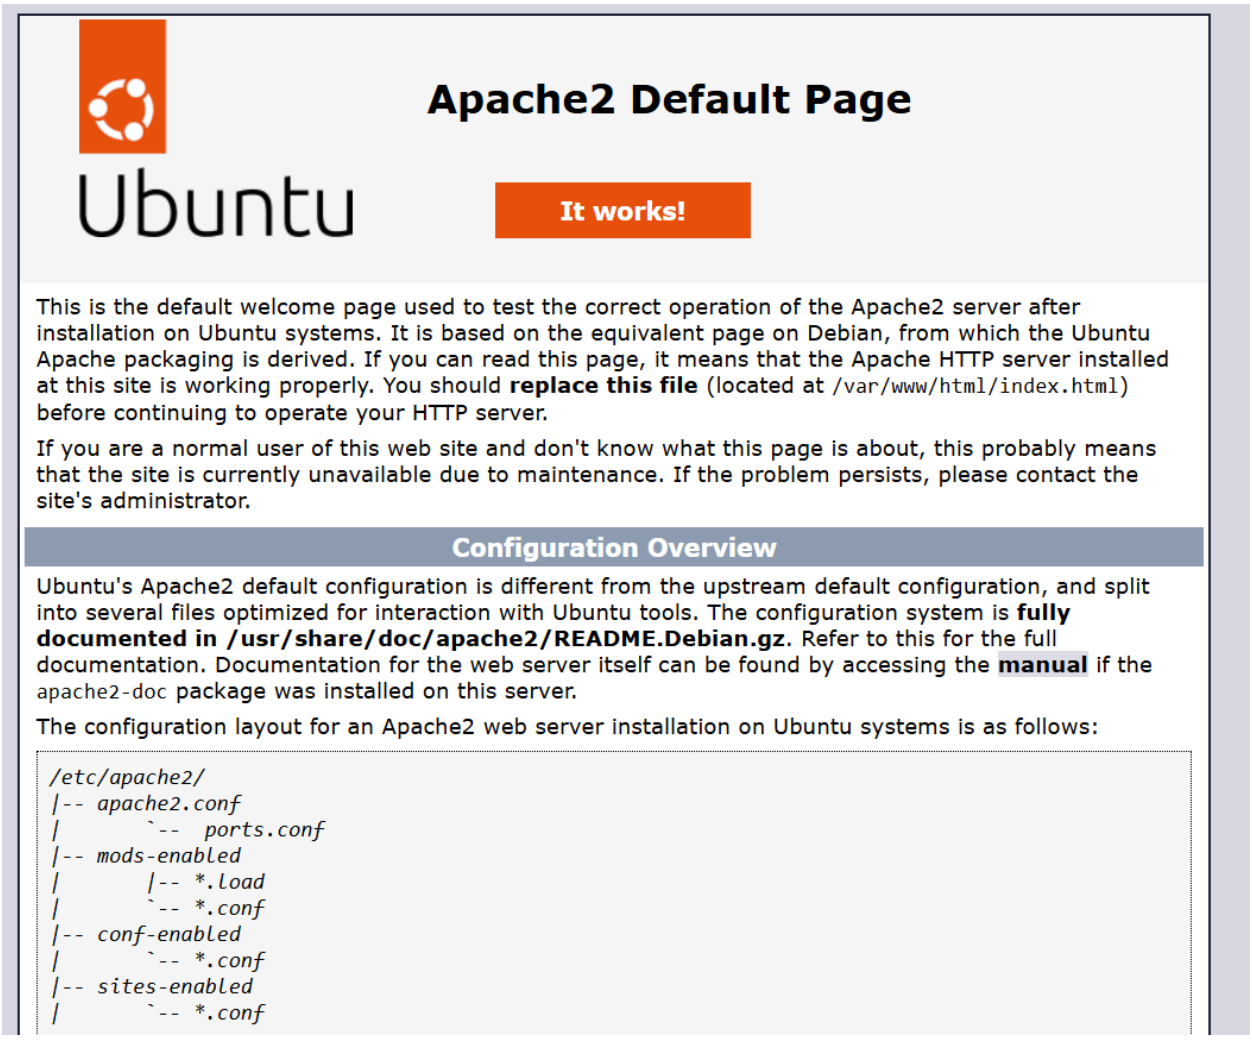

Confgi test:

```
rmavani@LAPTOP-RD44A66A:/var/www/apache2$ sudo a2ensite apache2.conf
Enabling site apache2.
To activate the new configuration, you need to run:
  systemctl reload apache2
rmavani@LAPTOP-RD44A66A:/var/www/apache2$ sudo a2dissite 000-default.conf
Site 000-default disabled.
To activate the new configuration, you need to run:
  systemctl reload apache2
rmavani@LAPTOP-RD44A66A:/var/www/apache2$ sudo apache2ctl configtest
Syntax OK
```