Operators are overloaded by means of **operator functions**, which are regular functions with **special names** — their name begins by the `operator` keyword followed by the **operator sign** that is overloaded.

```
type operator sign (parameters) { /*... body ...*/ }
```

**Overloadable operators**

```
+    -    *    /    =
     >    +=   -=   *=   /=

     >>

=   >>=  ==   !=
=   >=   ++   --   %    &    ^    !    |

~    &=   ^=   |=   &&   ||   %=   []   ()   ,    ->*  ->   new

delete    new[]    delete[]
```

followed by the **operator sign** that is overloaded.

```
type operator sign (parameters) { /*... body ...*/ }
```

**Overloadable operators**

```
+   -   *   /   =
    >   +=  -=  *=  /=

    >>

=   >>=  ==  !=
=   >=   ++  --  %   &   ^   !   |

-   &=   ^=  |=  &&  ||  %=  []  ()  ,   ->*  ->  new

delete   new[]   delete[]
```

Abhishek Srivastava

01:30.27 / 02.58.35

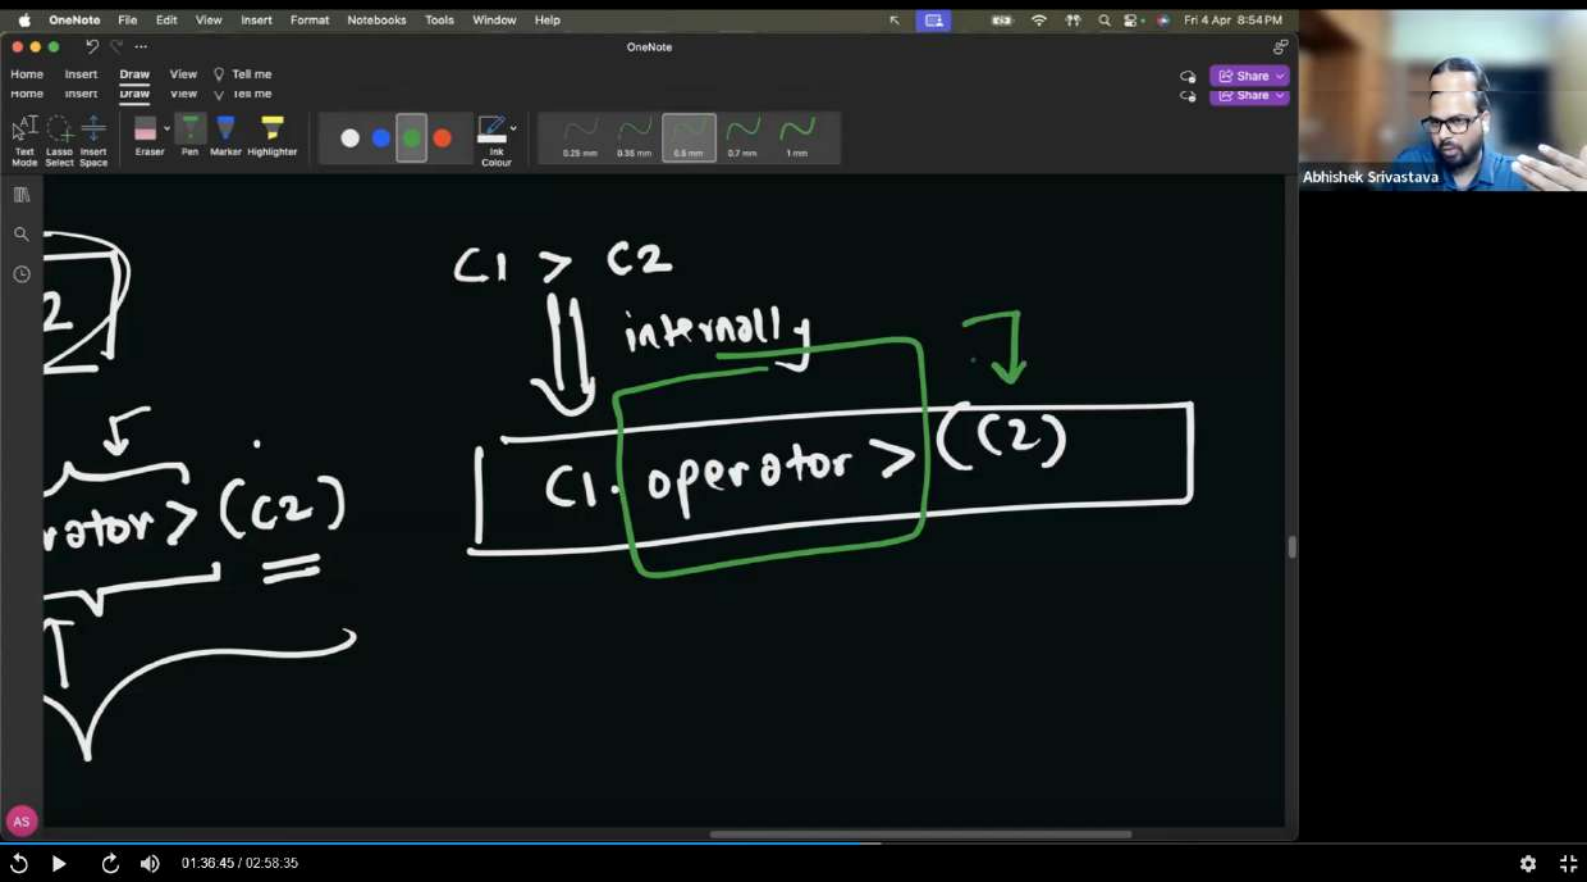
OneNote
Abhishek Srivastava
C1 > C2
internally
C1.operator>(C2)
rator>(C2)
01:36.45 / 02.58.35

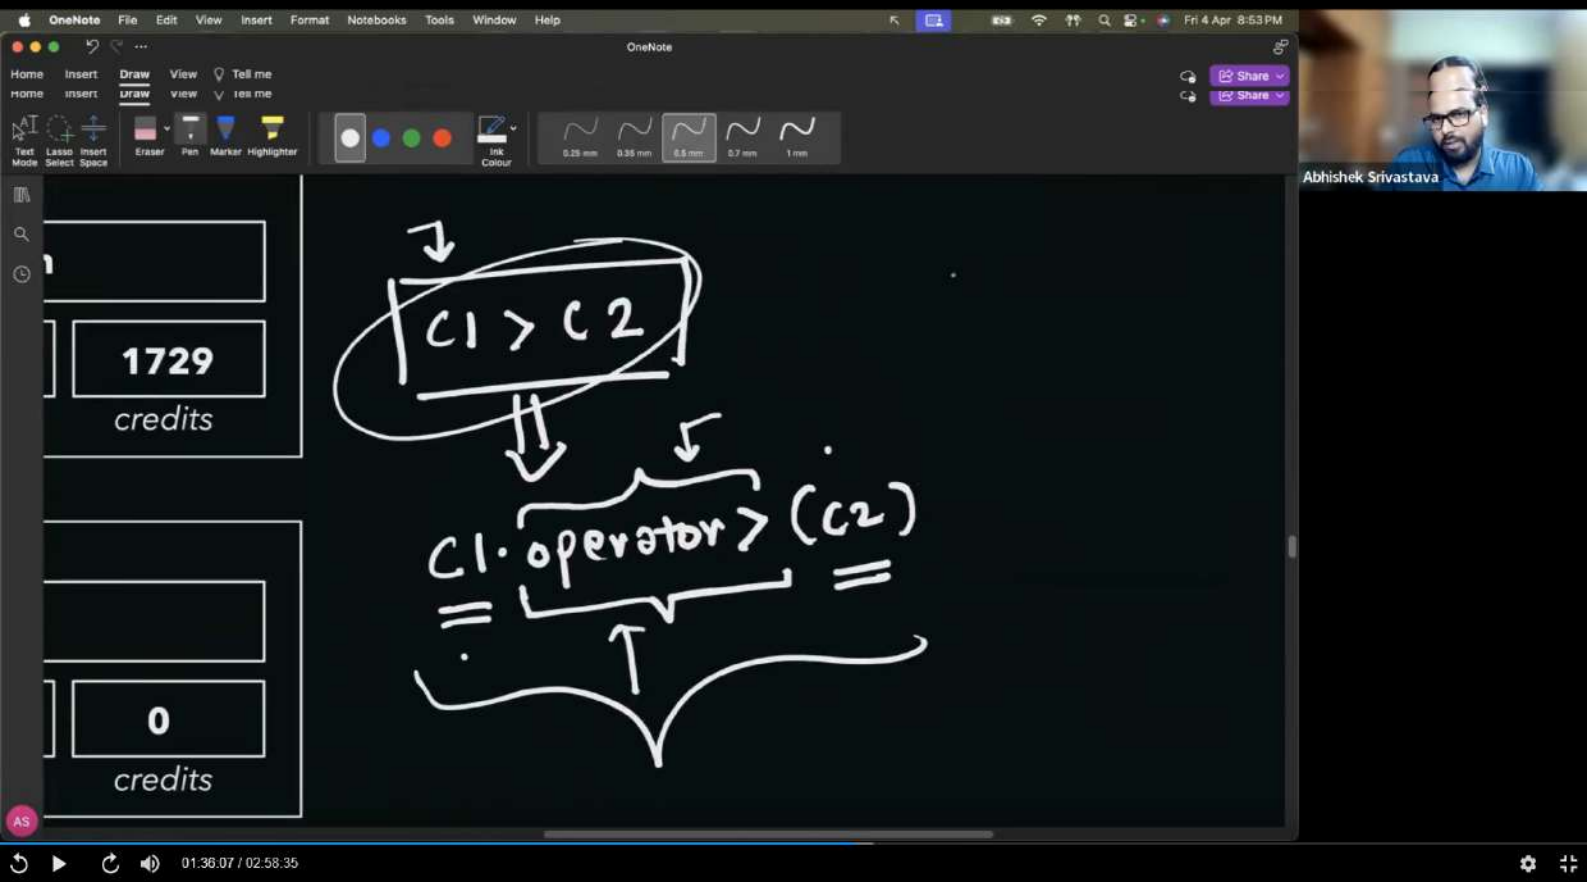
OneNote
Abhishek Srivastava
1729
credits
0
credits
c1 > c2
c1.operator>(c2)
01:36.07 / 02.58.35

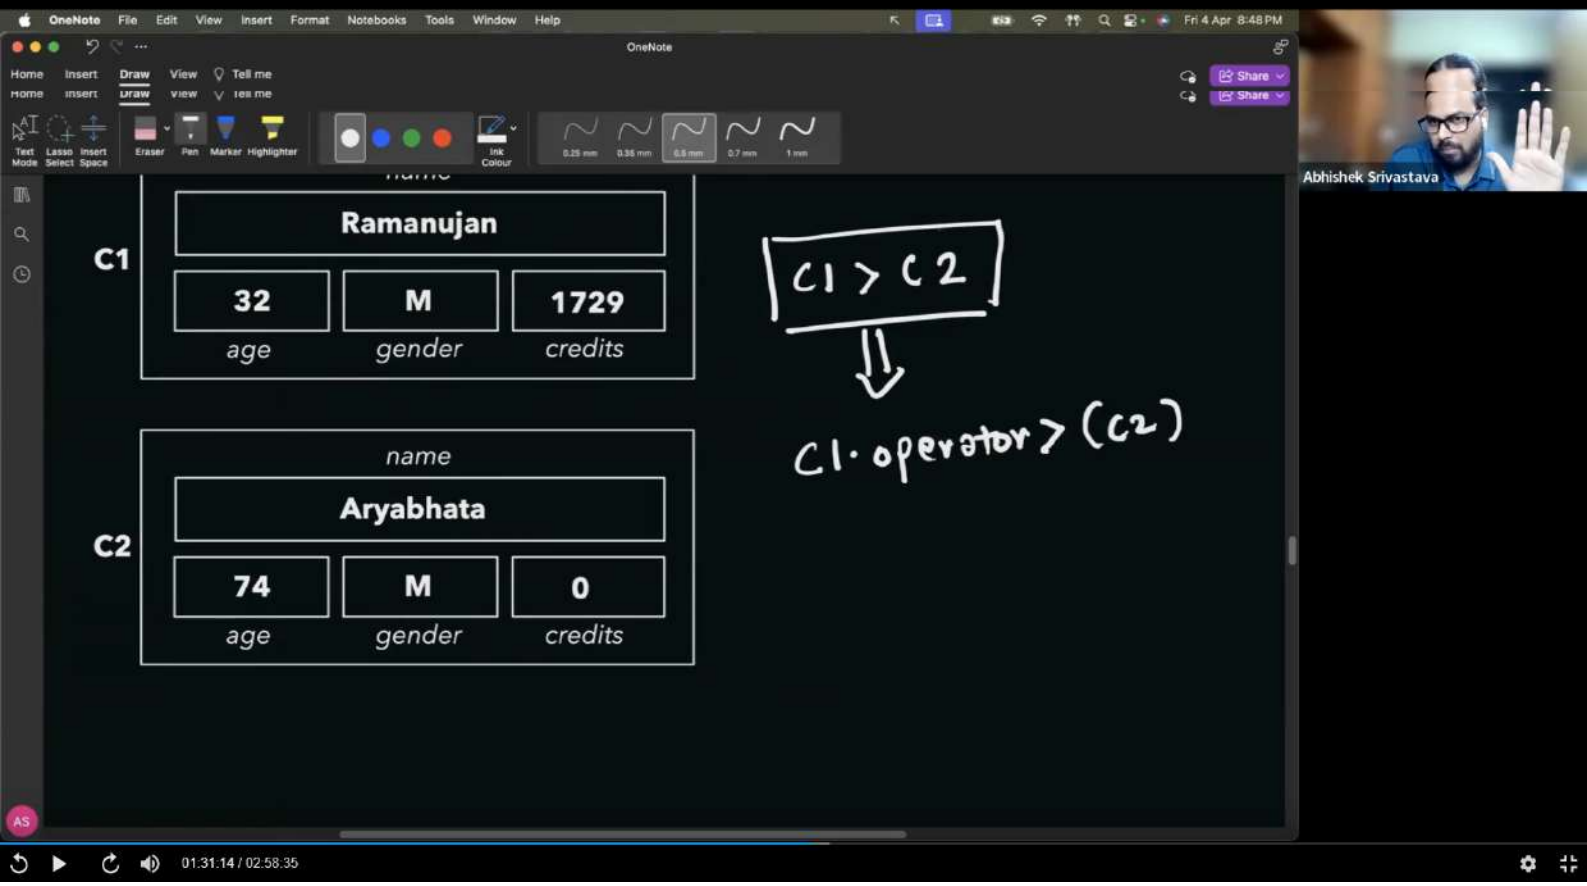
OneNote
Abhishek Srivastava
C1
Ramanujan
32
M
1729
age
gender
credits
C2
name
Aryabhata
74
M
0
age
gender
credits
C1 > C2
C1.operator> (C2)
01:31.14 / 02.58.35

```
bool operator>(const customer& c) {
  return age > c.age;
}
```

```
customer c1("Ramanujan", 32, 'M', 1729);
customer c2("Aryabhata", 74, 'M', 0);

c1 > c2 ? cout << "c1 > c2" : cout << "c1 < c2";
```

c1.operator>(c2)

vishnishreeyam@gmail.com

01:33:27 / 02:58:35

customer c

```
bool operator>(customer c) {
  return age > c.age;
}
```

c1.age  c2.age

```
customer c1("Ramanujan", 32, 'M', 1729);
customer c2("Aryabhata", 74, 'M', 0);

c1 > c2 ? cout << "c1 > c2" : cout << "c1 < c2";
```

c1.operator>(c2)

| | | |
|---|---|---|
| C1 | Rama | |
| | 32 | M |
| | age | gen |
| C2 | nar | |
| | Aryab | |
| | 74 | M |
| | age | gen |

Abhishek Srivastava

```
bool operator>(const customer& c) {
    return age > c.age;
}
```

c1.age  c2.age

```
customer c1("Ramanujan", 32, 'M', 1729);
customer c2("Aryabhata", 74, 'M', 0);

c1 > c2 ? cout << "c1 > c2" : cout << "c1 < c2";
```

c1.operator>(c2)

C1: Rama, 32, M, age, gen

c, C2: nar, Aryab, 74, M, age, gen

Abhishek Srivastava