
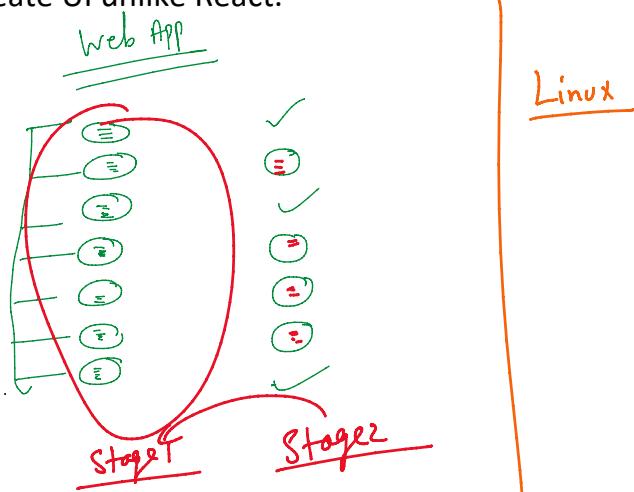





Why react is called a library and not a framework?

Because react does not come with almost all the pre installed libraries, which you would require for development.




Whereas angular comes with almost all the pre installed libraries that you would require for development purposes and you have to follow some set of rules to create UI unlike React.



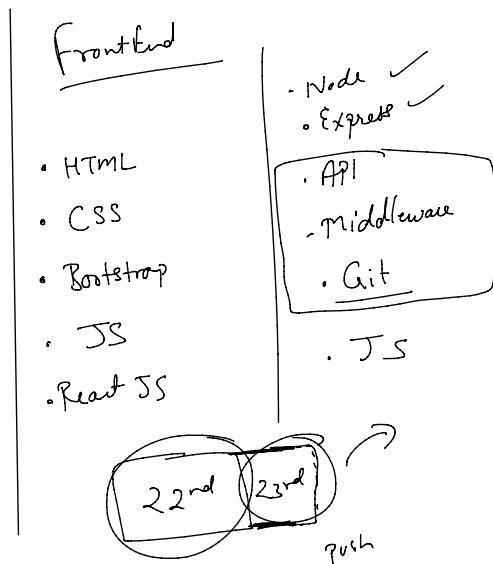



StageT StageZ

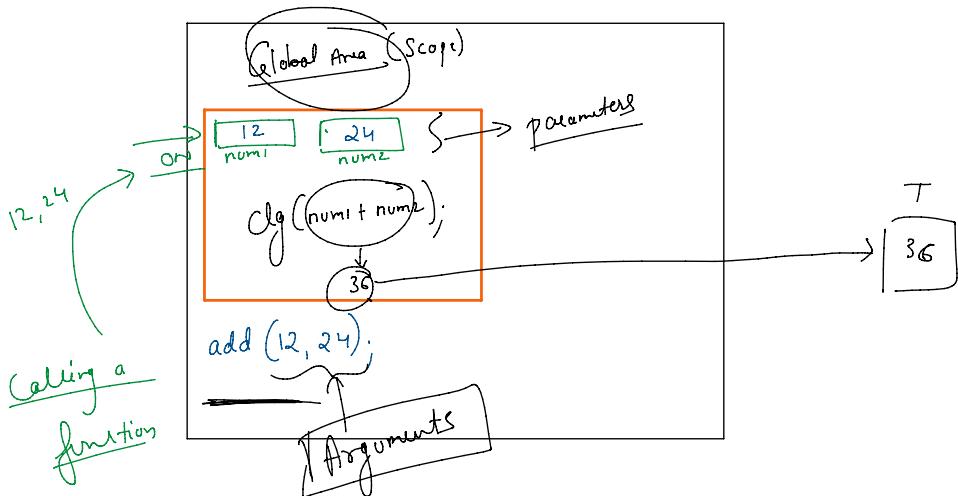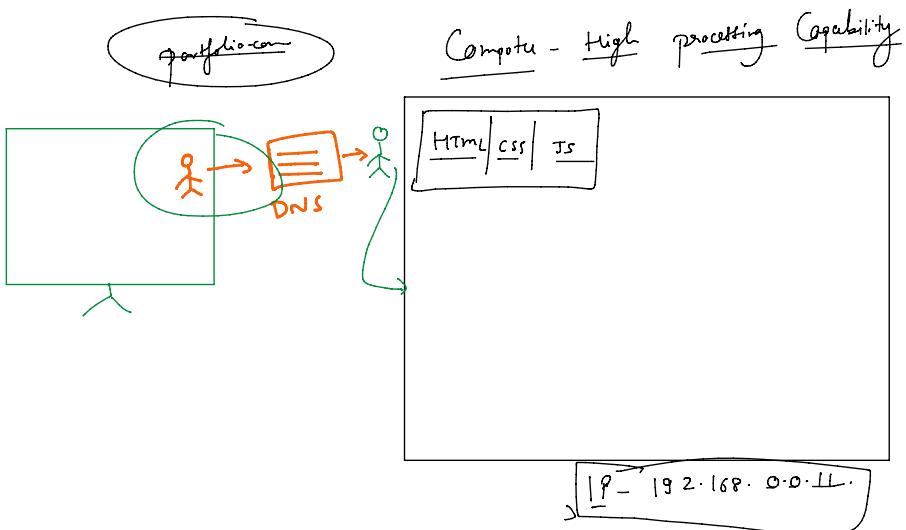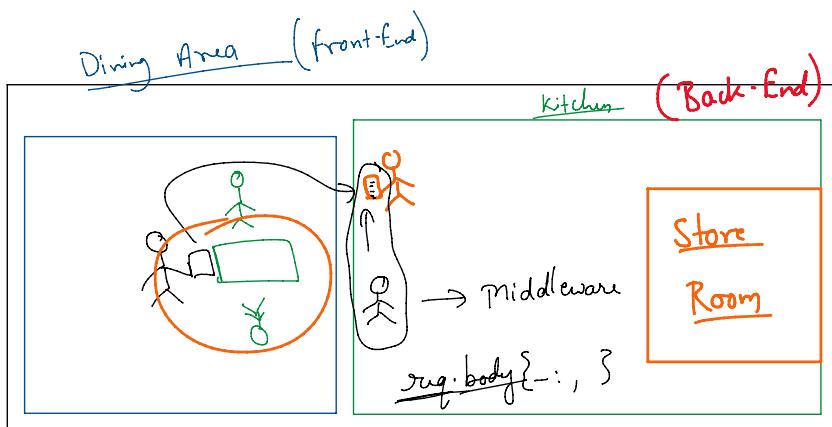

Camel Case Example

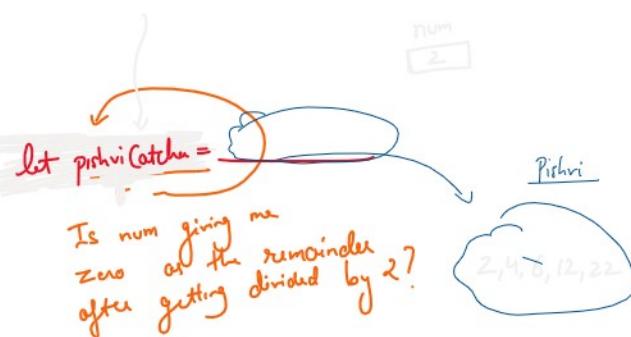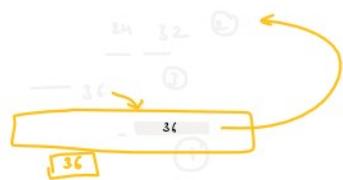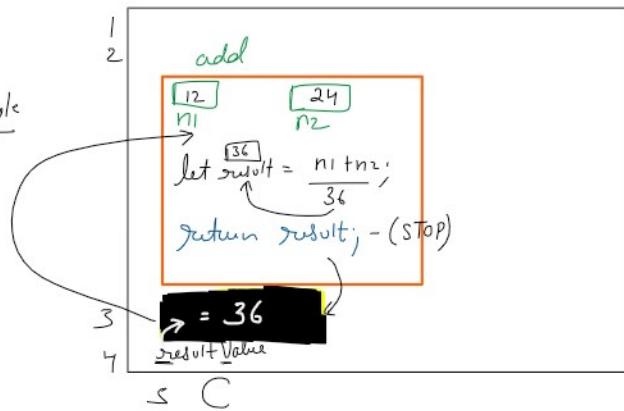

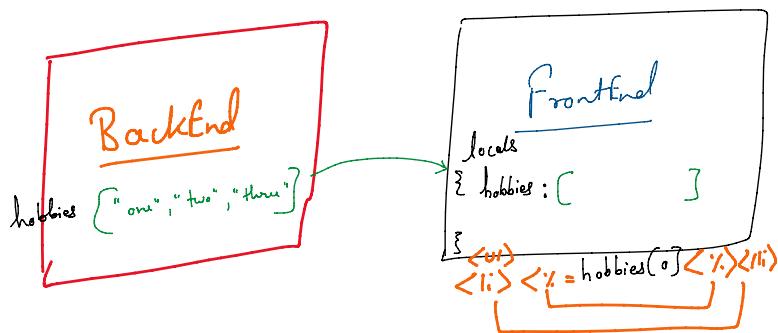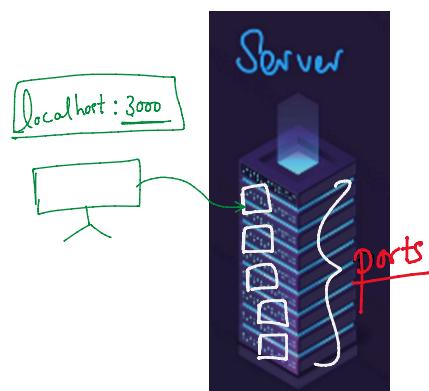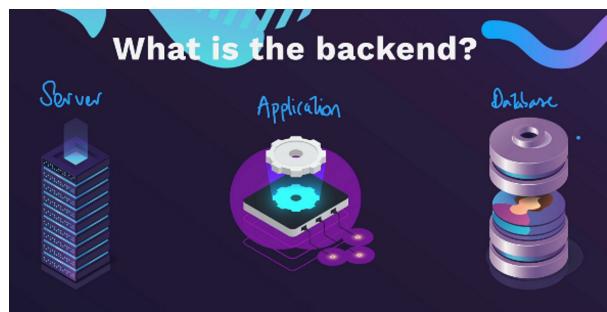

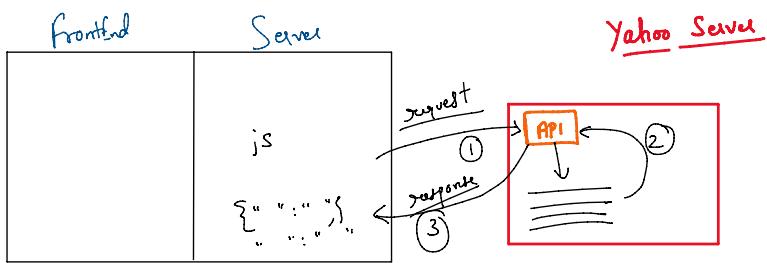

Workspaces Overview GET https://bored... GET ISS Current... GET ViMeet + No Environment

HTTP VIMEET / ViMeet

Endpoint: `GET https://bored-api.appbrewery.com/filter?type=education`

base URL: `https://bored-api.appbrewery.com/filter?`

Params: `type=education`

Auth: `Basic auth`

Headers: `(7)`

Body: `200 OK 750 ms 7.51 KB`

Tests: `Passed`

Settings: `Runners`

Cookies: `None`

Body (Pretty):

```

109     [
110       {
111         "activity": "Learn how to write in shorthand",
112         "availability": 0.1,
113         "type": "education",
114         "participants": 1,
115         "price": 0,
116         "accessibility": "Minor challenges",
117         "duration": "1 hour"
118       }
119     ]
  
```

Postbot Runner Console

Workspaces Overview GET https://bored... GET ISS Current... GET ViMeet + No Environment

HTTP VIMEET / ViMeet

Endpoint: `GET https://bored-api.appbrewery.com/filter?type=education`

base URL: `https://bored-api.appbrewery.com/filter?`

Params: `type=education`

Auth: `Basic auth`

Headers: `(7)`

Body: `200 OK 750 ms 7.51 KB`

Tests: `Passed`

Settings: `Runners`

Cookies: `None`

Body (Pretty):

```

109     [
110       {
111         "activity": "Learn how to write in shorthand",
112         "availability": 0.1,
113         "type": "education",
114         "participants": 1,
115         "price": 0,
116         "accessibility": "Minor challenges",
117         "duration": "1 hour"
118       }
119     ]
  
```

Postbot Runner Console

Workspaces Overview GET https://bored... GET ISS Current... GET ViMeet + No Environment

HTTP VIMEET / ViMeet

Endpoint: `GET https://bored-api.appbrewery.com/filter?type=education`

base URL: `https://bored-api.appbrewery.com/filter?`

Params: `type=education`

Auth: `Basic auth`

Headers: `(7)`

Body: `200 OK 750 ms 7.51 KB`

Tests: `Passed`

Settings: `Runners`

Cookies: `None`

Body (Pretty):

```

109     [
110       {
111         "activity": "Learn how to write in shorthand",
112         "availability": 0.1,
113         "type": "education",
114         "participants": 1,
115         "price": 0,
116         "accessibility": "Minor challenges",
117         "duration": "1 hour"
118       }
119     ]
  
```

Postbot Runner Console

Workspaces Overview GET https://bored... GET ISS Current... GET ViMeet + No Environment

HTTP VIMEET / ViMeet

Endpoint: `GET https://bored-api.appbrewery.com/filter?type=education`

base URL: `https://bored-api.appbrewery.com/filter?`

Params: `type=education`

Auth: `Basic auth`

Headers: `(7)`

Body: `200 OK 750 ms 7.51 KB`

Tests: `Passed`

Settings: `Runners`

Cookies: `None`

Body (Pretty):

```

109     [
110       {
111         "activity": "Learn how to write in shorthand",
112         "availability": 0.1,
113         "type": "education",
114         "participants": 1,
115         "price": 0,
116         "accessibility": "Minor challenges",
117         "duration": "1 hour"
118       }
119     ]
  
```


Postbot Runner Console

```


    "activity": "Learn how to write in shorthand",
    "availability": 0.1,
    "type": "education",
    "participants": 1,
    "price": 0,
    "accessibility": "Minor challenges",
    "duration": "above"
  
```

★ Request Terminology ★


- ① GET - Get me Something
- ② POST - Take Something (this thing) from me.
- ③ PUT - Replace Something Completely

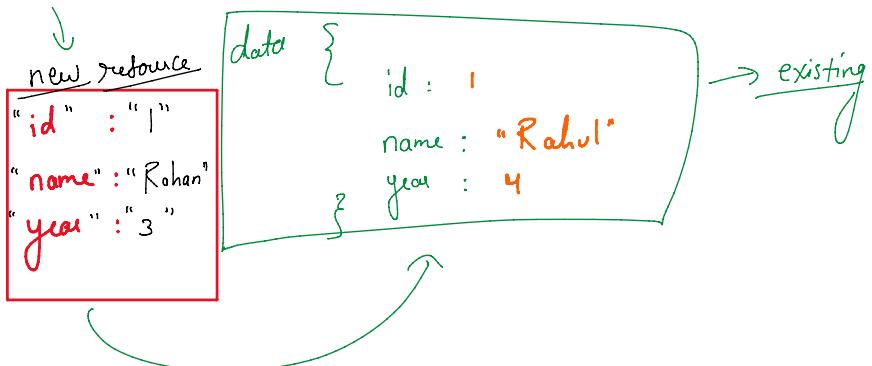

④ PATCH

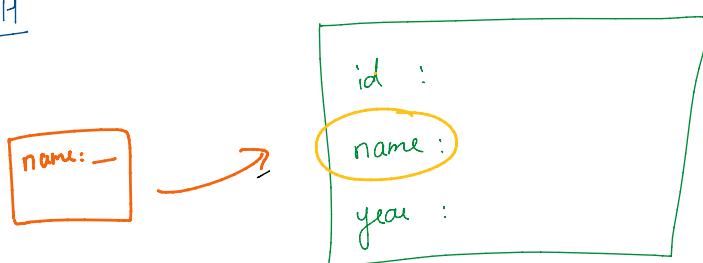


⑤ DELETE

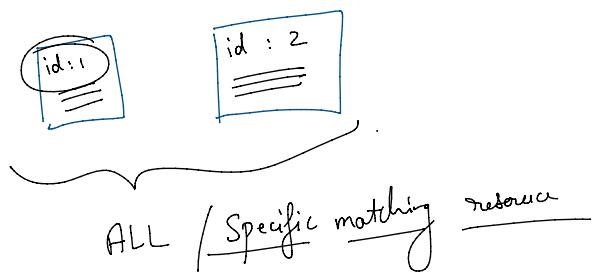

① Zero Authentication

② Basic Auth : Username & pass

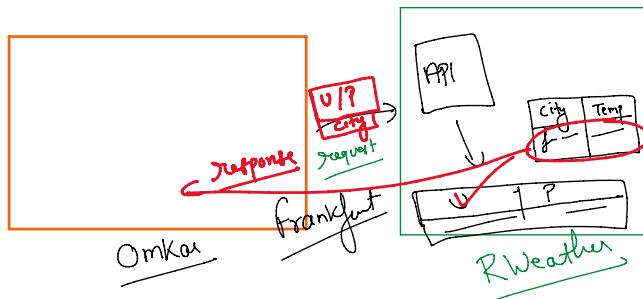


Screenshots of the Postman application interface. The left screenshot shows a "VIMEET / ViMeet" collection with a GET request to https://secrets-api.appbrewery.com/all?page=1. The "Auth" tab is selected, showing "Basic Auth" type with fields for "Username" (rahul@123) and "Password" (rahul@123). The right screenshot shows a similar setup for the same endpoint, also using "Basic Auth" with the same credentials.

③ API Key Authorization:



Authentication


- To check whether a user is registered



Authorization

- To check whether user is allowed to use an API

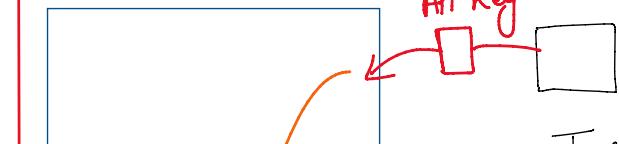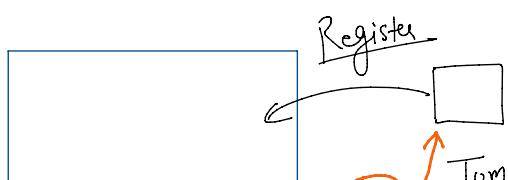

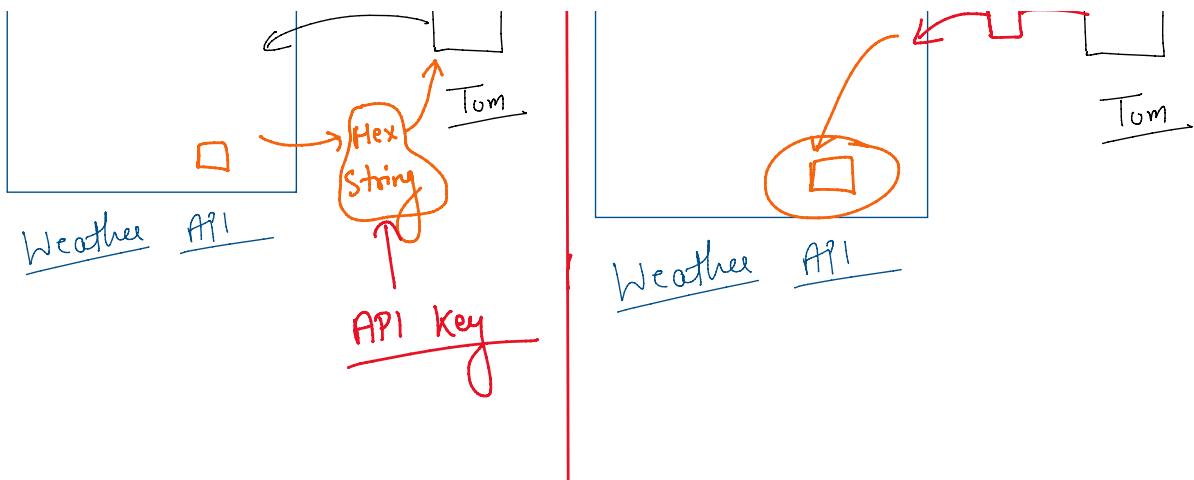

GET /generate-api-key

Generates a new API key.

Example Request:

```
GET https://secrets-api.appbrewery.com/generate-api-key
```

Example Response:

```
{
  "apiKey": "generated-api-key"
}
```

GET /generate-api-key

Generates a new API key.

Example Request:

```
GET https://secrets-api.appbrewery.com/generate-api-key
```

Example Response:

```
{
  "apiKey": "generated-api-key"
}
```

VIMEET / ViMeet

GET https://secrets-api.appbrewery.com/generate-api-key

Auth

Type: Basic Auth

Params: 429 Too Many Requests 314 ms 763 B

Body: 1 Too many requests, please try again later.

GET /generate-api-key

Generates a new API key.

Example Request:

```
GET https://secrets-api.appbrewery.com/generate-api-key
```

Example Response:

```
{
  "apiKey": "generated-api-key"
}
```

GET /filter

Returns a random secret with a particular embarrassment score or higher. API key authentication is required.

Query Parameters:

- **apiKey:** Your API Key generated from the `/generate-api-key` endpoint.
- **score:** The minimum embarrassment score to filter by.

Example Request:

```
GET https://secrets-api.appbrewery.com/filter?score=5&apiKey=b886c845-9989-43aa-8c60-ea4a669bb587
```

Example Response:

```
[{"id": "1", "secret": "This is a secret with embarrassment score 5 or higher.", "emScore": 5, "username": "user123", "timestamp": "2022-10-01T12:34:56Z"}, {"id": "2", "secret": "Another secret with embarrassment score 5 or higher.", "emScore": 5, "username": "user123", "timestamp": "2022-10-02T10:11:12Z"} // ... more secrets ...]
```

GET /filter

Returns a random secret with a particular embarrassment score or higher. API key authentication is required.

Query Parameters:

- **apiKey:** Your API Key generated from the `/generate-api-key` endpoint.
- **score:** The minimum embarrassment score to filter by.

Example Request:

```
GET https://secrets-api.appbrewery.com/filter?score=5&apiKey=b886c845-9989-43aa-8c60-ea4a669bb587
```

Example Response:

```
[{"id": "1", "secret": "This is a secret with embarrassment score 5 or higher.", "emScore": 5, "username": "user123", "timestamp": "2022-09-30T23:00:00Z"}, {"id": "2", "secret": "Another secret with embarrassment score 5 or higher.", "emScore": 5, "username": "user123", "timestamp": "2022-09-30T23:00:00Z"} // ... more secrets ...]
```

Workspaces More ▾

Overview GET https://bon... GET ISS Current GET ViMeet + No Environment

Collections

HTTP VIIMEET / ViMeet

GET https://secrets-api.appbrewery.com/generate-api-key Send

Params Auth Headers (9) Body Pre-req. Tests Settings

API Key

The authorization header will be automatically generated when you send the request. Learn more about [API Key](#) authorization.

Key	apiKey
Value	
Add to	Query Params

Body 429 Too Many Requests 314 ms 763 B Save as example

Environments

History

Postbot Runner

Workspaces More ▾

Overview GET https://bon... GET ISS Current GET ViMeet + No Environment

Collections

VIIMEET / ViMeet

GET https://secrets-api.appbrewery.com/generate-api-key Send

Params Auth Headers (9) Body Pre-req. Tests Settings

Auth

The authorization header will be automatically generated when you send the request. Learn more about [API Key](#) authorization.

Key	apiKey
Value	
Add to	Query Params

Body 429 Too Many Requests 314 ms 763 B Save as example

Console

Postbot Runner