

# Building your Deep Neural Network: Step by Step

Welcome to your week 4 assignment (part 1 of 2)! You have previously trained a 2-layer Neural Network (with a single hidden layer). This week, you will build a deep neural network, with as many layers as you want!

- In this notebook, you will implement all the functions required to build a deep neural network.
- In the next assignment, you will use these functions to build a deep neural network for image classification.

**After this assignment you will be able to:**

- Use non-linear units like ReLU to improve your model
- Build a deeper neural network (with more than 1 hidden layer)
- Implement an easy-to-use neural network class

**Notation:**

- Superscript  $[l]$  denotes a quantity associated with the  $l^{th}$  layer.
  - Example:  $a^{[L]}$  is the  $L^{th}$  layer activation.  $W^{[L]}$  and  $b^{[L]}$  are the  $L^{th}$  layer parameters.
- Superscript  $(i)$  denotes a quantity associated with the  $i^{th}$  example.
  - Example:  $x^{(i)}$  is the  $i^{th}$  training example.
- Lowerscript  $i$  denotes the  $i^{th}$  entry of a vector.
  - Example:  $a_i^{[l]}$  denotes the  $i^{th}$  entry of the  $l^{th}$  layer's activations).

Let's get started!

## 1 - Packages

Let's first import all the packages that you will need during this assignment.

- [numpy \(www.numpy.org\)](http://www.numpy.org) is the main package for scientific computing with Python.
- [matplotlib \(http://matplotlib.org\)](http://matplotlib.org) is a library to plot graphs in Python.
- `dnn_utils` provides some necessary functions for this notebook.
- `testCases` provides some test cases to assess the correctness of your functions
- `np.random.seed(1)` is used to keep all the random function calls consistent. It will help us grade your work. Please don't change the seed.

```
In [1]: import numpy as np
import h5py
import matplotlib.pyplot as plt
from testCases_v3 import *
from dnn_utils_v2 import sigmoid, sigmoid_backward, relu, relu_backward

%matplotlib inline
plt.rcParams['figure.figsize'] = (5.0, 4.0) # set default size of plots
plt.rcParams['image.interpolation'] = 'nearest'
plt.rcParams['image.cmap'] = 'gray'

%load_ext autoreload
%autoreload 2


np.random.seed(1)
```



## 2 - Outline of the Assignment

To build your neural network, you will be implementing several "helper functions". These helper functions will be used in the next assignment to build a two-layer neural network and an  $L$ -layer neural network. Each small helper function you will implement will have detailed instructions that will walk you through the necessary steps. Here is an outline of this assignment, you will:

- Initialize the parameters for a two-layer network and for an  $L$ -layer neural network.
- Implement the forward propagation module (shown in purple in the figure below).
  - Complete the LINEAR part of a layer's forward propagation step (resulting in  $z^{[l]}$ ).
  - We give you the ACTIVATION function (relu/sigmoid).
  - Combine the previous two steps into a new [LINEAR->ACTIVATION] forward function.
  - Stack the [LINEAR->RELU] forward function  $L-1$  time (for layers 1 through  $L-1$ ) and add a [LINEAR->SIGMOID] at the end (for the final layer  $L$ ). This gives you a new `L_model_forward` function.
- Compute the loss.
- Implement the backward propagation module (denoted in red in the figure below).
  - Complete the LINEAR part of a layer's backward propagation step.
  - We give you the gradient of the ACTIVATE function (relu\_backward/sigmoid\_backward)
  - Combine the previous two steps into a new [LINEAR->ACTIVATION] backward function.
  - Stack [LINEAR->RELU] backward  $L-1$  times and add [LINEAR->SIGMOID] backward in a new `L_model_backward` function
- Finally update the parameters.

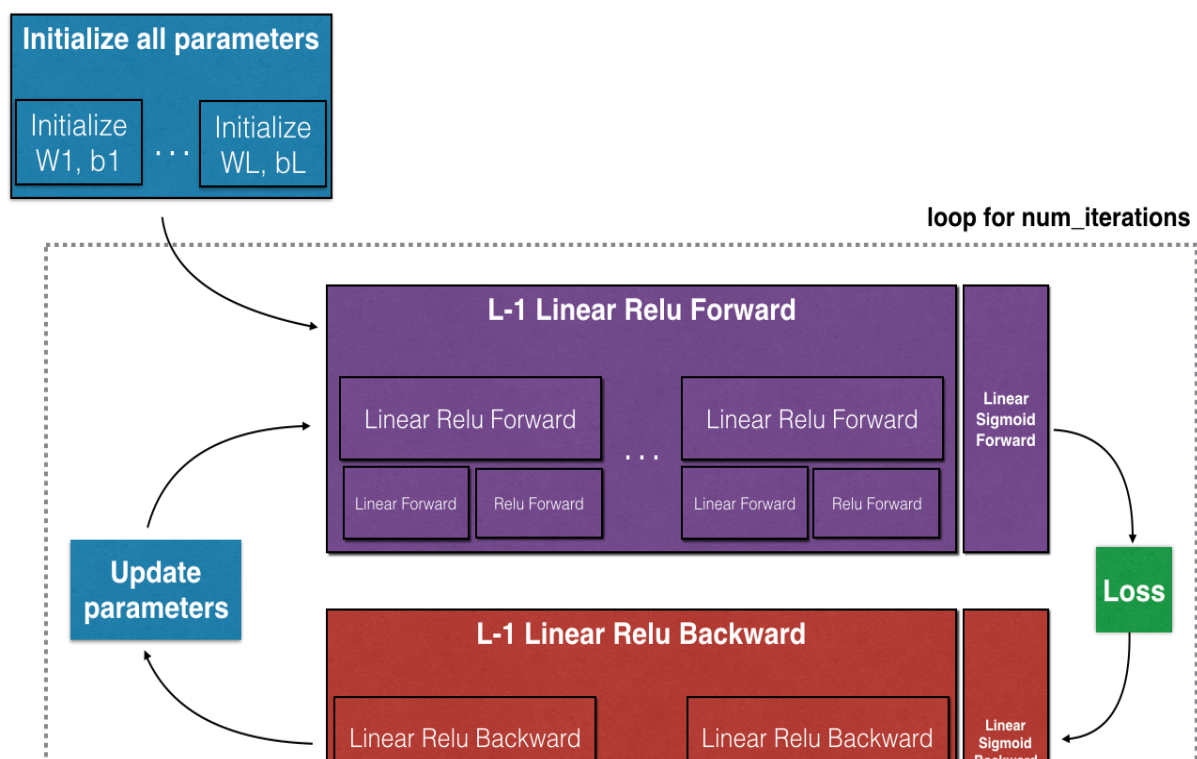

## 3 - Initialization

You will write two helper functions that will initialize the parameters for your model. The first function will be used to initialize parameters for a two layer model. The second one will generalize this initialization process to  $L$  layers.

### 3.1 - 2-layer Neural Network

**Exercise:** Create and initialize the parameters of the 2-layer neural network.

**Instructions:**

- The model's structure is: *LINEAR* -> *RELU* -> *LINEAR* -> *SIGMOID*.
- Use random initialization for the weight matrices. Use `np.random.randn(shape)*0.01` with the correct shape.
- Use zero initialization for the biases. Use `np.zeros(shape)`.

```

In [2]: # GRADED FUNCTION: initialize_parameters

def initialize_parameters(n_x, n_h, n_y):
    """
    Argument:
    n_x -- size of the input layer
    n_h -- size of the hidden layer
    n_y -- size of the output layer

    Returns:
    parameters -- python dictionary containing your par
ameters:

                    W1 -- weight matrix of shape (n_h,
n_x)
                    b1 -- bias vector of shape (n_h, 1)
                    W2 -- weight matrix of shape (n_y,
n_h)
                    b2 -- bias vector of shape (n_y, 1)
    """

    np.random.seed(1)

    ### START CODE HERE ### (≈ 4 lines of code)
    W1 = np.random.randn(n_h, n_x) * 0.01
    b1 = np.zeros(shape = (n_h, 1))
    W2 = np.random.randn(n_y, n_h) * 0.01
    b2 = np.zeros(shape = (n_y, 1))
    ### END CODE HERE ###

    assert(W1.shape == (n_h, n_x))
    assert(b1.shape == (n_h, 1))
    assert(W2.shape == (n_y, n_h))
    assert(b2.shape == (n_y, 1))

    parameters = {"W1": W1,
                  "b1": b1,
                  "W2": W2,
                  "b2": b2}

    return parameters

```

```

In [3]: parameters = initialize_parameters(3,2,1)
print("W1 = " + str(parameters["W1"]))
print("b1 = " + str(parameters["b1"]))
print("W2 = " + str(parameters["W2"]))
print("b2 = " + str(parameters["b2"]))

W1 = [[ 0.01624345 -0.00611756 -0.00528172]
      [-0.01072969  0.00865408 -0.02301539]]
b1 = [[ 0.]
      [ 0.]]
W2 = [[ 0.01744812 -0.00761207]]
b2 = [[ 0.]]

```

**Expected output:**

<b>**W1**</b>	[[ 0.01624345 -0.00611756 -0.00528172] [-0.01072969 0.00865408 -0.02301539]]
<b>**b1**</b>	[[ 0.] [ 0.]]
<b>**W2**</b>	[[ 0.01744812 -0.00761207]]
<b>**b2**</b>	[[ 0.]]

### 3.2 - L-layer Neural Network

The initialization for a deeper L-layer neural network is more complicated because there are many more weight matrices and bias vectors. When completing the `initialize_parameters_deep`, you should make sure that your dimensions match between each layer. Recall that  $n^{[l]}$  is the number of units in layer  $l$ . Thus for example if the size of our input  $X$  is (12288, 209) (with  $m = 209$  examples) then:

	**Shape of W**	**Shape of b**	**Activation**	**Shape of Activation**
**Layer 1**	$(n^{[1]}, 12288)$	$(n^{[1]}, 1)$	$Z^{[1]} = W^{[1]}X + b^{[1]}$	$(n^{[1]}, 209)$
**Layer 2**	$(n^{[2]}, n^{[1]})$	$(n^{[2]}, 1)$	$Z^{[2]} = W^{[2]}A^{[1]} + b^{[2]}$	$(n^{[2]}, 209)$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
**Layer L-1**	$(n^{[L-1]}, n^{[L-2]})$	$(n^{[L-1]}, 1)$	$Z^{[L-1]} = W^{[L-1]}A^{[L-2]} + b^{[L-1]}$	$(n^{[L-1]}, 209)$
**Layer L**	$(n^{[L]}, n^{[L-1]})$	$(n^{[L]}, 1)$	$Z^{[L]} = W^{[L]}A^{[L-1]} + b^{[L]}$	$(n^{[L]}, 209)$

Remember that when we compute  $WX + b$  in python, it carries out broadcasting. For example, if:

$$W = \begin{bmatrix} j & k & l \\ m & n & o \\ p & q & r \end{bmatrix} \quad X = \begin{bmatrix} a & b & c \\ d & e & f \\ g & h & i \end{bmatrix} \quad b = \begin{bmatrix} s \\ t \\ u \end{bmatrix}$$

Then  $WX + b$  will be:

$$WX + b = \begin{bmatrix} (ja + kd + lg) + s & (jb + ke + lh) + s & (jc + kf + li) + s \\ (ma + nd + og) + t & (mb + ne + oh) + t & (mc + nf + oi) + t \\ (pa + qd + rg) + u & (pb + qe + rh) + u & (pc + qf + ri) + u \end{bmatrix}$$



**Exercise:** Implement initialization for an L-layer Neural Network.

**Instructions:**

- The model's structure is  $[LINEAR \rightarrow RELU] \times (L-1) \rightarrow LINEAR \rightarrow SIGMOID$ . I.e., it has  $L - 1$  layers using a ReLU activation function followed by an output layer with a sigmoid activation function.
- Use random initialization for the weight matrices. Use `np.random.randn(shape) * 0.01`.
- Use zeros initialization for the biases. Use `np.zeros(shape)`.
- We will store  $n^{[l]}$ , the number of units in different layers, in a variable `layer_dims`. For example, the `layer_dims` for the "Planar Data classification model" from last week would have been `[2,4,1]`: There were two inputs, one hidden layer with 4 hidden units, and an output layer with 1 output unit. Thus means  $W1$ 's shape was  $(4,2)$ ,  $b1$  was  $(4,1)$ ,  $W2$  was  $(1,4)$  and  $b2$  was  $(1,1)$ . Now you will generalize this to  $L$  layers!
- Here is the implementation for  $L = 1$  (one layer neural network). It should inspire you to implement the general case (L-layer neural network).

```
if L == 1:
    parameters["W" + str(L)] = np.random.randn(layer_d
ims[1], layer_dims[0]) * 0.01
    parameters["b" + str(L)] = np.zeros((layer_dims[1]
, 1))
```

```

In [6]: # GRADED FUNCTION: initialize_parameters_deep

def initialize_parameters_deep(layer_dims):
    """
    Arguments:
        layer_dims -- python array (list) containing the dimensions of each layer in our network

    Returns:
        parameters -- python dictionary containing your parameters "W1", "b1", ..., "WL", "bL":
            Wl -- weight matrix of shape (layer_dims[l], layer_dims[l-1])
            bl -- bias vector of shape (layer_dims[l], 1)
    """

    np.random.seed(3)
    parameters = {}
    L = len(layer_dims)            # number of layers in the network

    for l in range(1, L):
        ### START CODE HERE ### (~ 2 lines of code)
        parameters['W' + str(l)] = np.random.randn(layer_dims[l], layer_dims[l-1]) * 0.01
        parameters['b' + str(l)] = np.zeros(shape = (layer_dims[l],1))
        ### END CODE HERE ###

        assert(parameters['W' + str(l)].shape == (layer_dims[l], layer_dims[l-1]))
        assert(parameters['b' + str(l)].shape == (layer_dims[l], 1))

    return parameters

```

```
In [7]: parameters = initialize_parameters_deep([5,4,3])
print("W1 = " + str(parameters["W1"]))
print("b1 = " + str(parameters["b1"]))
print("W2 = " + str(parameters["W2"]))
print("b2 = " + str(parameters["b2"]))

W1 = [[ 0.01788628  0.0043651  0.00096497 -0.01863493 -
0.00277388]
 [-0.00354759 -0.00082741 -0.00627001 -0.00043818 -0.004
77218]
 [-0.01313865  0.00884622  0.00881318  0.01709573  0.000
50034]
 [-0.00404677 -0.0054536  -0.01546477  0.00982367 -0.011
01068]]
b1 = [[ 0.]
 [ 0.]
 [ 0.]
 [ 0.]]
W2 = [[-0.01185047 -0.0020565  0.01486148  0.00236716]
 [-0.01023785 -0.00712993  0.00625245 -0.00160513]
 [-0.00768836 -0.00230031  0.00745056  0.01976111]]
b2 = [[ 0.]
 [ 0.]
 [ 0.]]
```

**Expected output:**

<b>**W1**</b>	[[ 0.01788628 0.0043651 0.00096497 -0.01863493 -0.00277388] [-0.00354759 -0.00082741 -0.00627001 -0.00043818 -0.00477218] [-0.01313865 0.00884622 0.00881318 0.01709573 0.00050034] [-0.00404677 -0.0054536 -0.01546477 0.00982367 -0.01101068]]
<b>**b1**</b>	[[ 0.] [ 0.] [ 0.] [ 0.]]
<b>**W2**</b>	[[[-0.01185047 -0.0020565 0.01486148 0.00236716] [-0.01023785 -0.00712993 0.00625245 -0.00160513] [-0.00768836 -0.00230031 0.00745056 0.01976111]]
<b>**b2**</b>	[[ 0.] [ 0.] [ 0.]]

## 4 - Forward propagation module

### 4.1 - Linear Forward

Now that you have initialized your parameters, you will do the forward propagation module. You will start by implementing some basic functions that you will use later when implementing the model. You will complete three functions in this order:

- LINEAR
- LINEAR -> ACTIVATION where ACTIVATION will be either ReLU or Sigmoid.
- [LINEAR -> RELU]  $\times$  (L-1) -> LINEAR -> SIGMOID (whole model)

The linear forward module (vectorized over all the examples) computes the following equations:

$$Z^{[l]} = W^{[l]}A^{[l-1]} + b^{[l]}$$

where  $A^{[0]} = X$ .

**Exercise:** Build the linear part of forward propagation.

**Reminder:** The mathematical representation of this unit is  $Z^{[l]} = W^{[l]}A^{[l-1]} + b^{[l]}$ . You may also find `np.dot()` useful. If your dimensions don't match, printing `W.shape` may help.

```

In [10]: # GRADED FUNCTION: linear_forward

def linear_forward(A, W, b):
    """
    Implement the linear part of a layer's forward prop
    agation.

    Arguments:
    A -- activations from previous layer (or input data
    ): (size of previous layer, number of examples)
    W -- weights matrix: numpy array of shape (size of
    current layer, size of previous layer)
    b -- bias vector, numpy array of shape (size of the
    current layer, 1)

    Returns:
    Z -- the input of the activation function, also cal
    led pre-activation parameter
    cache -- a python dictionary containing "A", "W" an
    d "b" ; stored for computing the backward pass efficien
    tly
    """

    ### START CODE HERE ### (~ 1 line of code)
    Z = np.dot(W, A) + b
    ### END CODE HERE ###

    assert(Z.shape == (W.shape[0], A.shape[1]))
    cache = (A, W, b)

    return Z, cache

```

```

In [11]: A, W, b = linear_forward_test_case()

Z, linear_cache = linear_forward(A, W, b)
print("Z = " + str(Z))

Z = [[ 3.26295337 -1.23429987]]

```

Expected output:

<b>**Z**</b>	[[ 3.26295337 -1.23429987]]
--------------	--------------------------------

## 4.2 - Linear-Activation Forward

In this notebook, you will use two activation functions:

- **Sigmoid:**  $\sigma(Z) = \sigma(WA + b) = \frac{1}{1 + e^{-(WA+b)}}$ . We have provided you with the `sigmoid` function. This function returns **two** items: the activation value "a" and a "cache" that contains "Z" (it's what we will feed in to the corresponding backward function). To use it you could just call:

```
A, activation_cache = sigmoid(Z)
```

- **ReLU:** The mathematical formula for ReLU is  $A = \text{RELU}(Z) = \max(0, Z)$ . We have provided you with the `relu` function. This function returns **two** items: the activation value "A" and a "cache" that contains "Z" (it's what we will feed in to the corresponding backward function). To use it you could just call:

```
A, activation_cache = relu(Z)
```

For more convenience, you are going to group two functions (Linear and Activation) into one function (LINEAR->ACTIVATION). Hence, you will implement a function that does the LINEAR forward step followed by an ACTIVATION forward step.

**Exercise:** Implement the forward propagation of the *LINEAR->ACTIVATION* layer. Mathematical relation is:  $A^{[l]} = g(Z^{[l]}) = g(W^{[l]}A^{[l-1]} + b^{[l]})$  where the activation "g" can be `sigmoid()` or `relu()`. Use `linear_forward()` and the correct activation function.

```
In [12]: # GRADED FUNCTION: linear_activation_forward

def linear_activation_forward(A_prev, W, b, activation)
:
    """
    Implement the forward propagation for the LINEAR->A
    CTIVATION layer

    Arguments:
    A_prev -- activations from previous layer (or input
    data): (size of previous layer, number of examples)
    W -- weights matrix: numpy array of shape (size of
    current layer, size of previous layer)
    b -- bias vector, numpy array of shape (size of the
    current layer, 1)
    activation -- the activation to be used in this lay
    er, stored as a text string: "sigmoid" or "relu"

    Returns:
    A -- the output of the activation function, also ca
    lled the post-activation value
    cache -- a python dictionary containing "linear_cac
    he" and "activation_cache";
           stored for computing the backward pass eff
    iciently
    """

    if activation == "sigmoid":
        # Inputs: "A_prev, W, b". Outputs: "A, activati
        on_cache".
        ### START CODE HERE ### (~ 2 lines of code)
        Z, linear_cache = linear_forward(A_prev, W, b)
        A, activation_cache = sigmoid(Z)
        ### END CODE HERE ###

    elif activation == "relu":
        # Inputs: "A_prev, W, b". Outputs: "A, activati
        on_cache".
        ### START CODE HERE ### (~ 2 lines of code)
        Z, linear_cache = linear_forward(A_prev, W, b)
        A, activation_cache = relu(Z)
        ### END CODE HERE ###

    assert (A.shape == (W.shape[0], A_prev.shape[1]))
    cache = (linear_cache, activation_cache)

    return A, cache
```

```
In [13]: A_prev, W, b = linear_activation_forward_test_case()

A, linear_activation_cache = linear_activation_forward(
    A_prev, W, b, activation = "sigmoid")
print("With sigmoid: A = " + str(A))

A, linear_activation_cache = linear_activation_forward(
    A_prev, W, b, activation = "relu")
print("With ReLU: A = " + str(A))

With sigmoid: A = [[ 0.96890023  0.11013289]]
With ReLU: A = [[ 3.43896131  0.          ]]
```

**Expected output:**


<b>**With sigmoid: A **</b>	<b>[[ 0.96890023 0.11013289]]</b>
<b>**With ReLU: A **</b>	<b>[[ 3.43896131 0. ]]</b>

**Note:** In deep learning, the "[LINEAR->ACTIVATION]" computation is counted as a single layer in the neural network, not two layers.



## d) L-Layer Model

For even more convenience when implementing the  $L$ -layer Neural Net, you will need a function that replicates the previous one (`linear_activation_forward` with RELU)  $L - 1$  times, then follows that with one `linear_activation_forward` with SIGMOID.

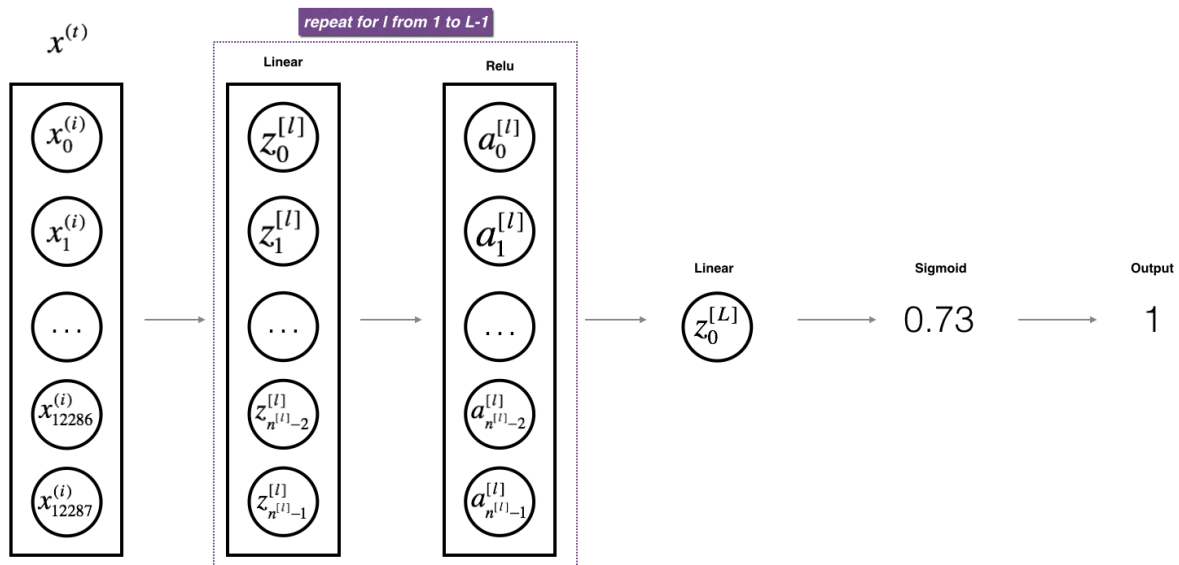

**Figure 2** :  $[\text{LINEAR} \rightarrow \text{RELU}] \times (L-1) \rightarrow \text{LINEAR} \rightarrow \text{SIGMOID}$  model

**Exercise:** Implement the forward propagation of the above model.

**Instruction:** In the code below, the variable `AL` will denote

$$A^{[L]} = \sigma(Z^{[L]}) = \sigma(W^{[L]}A^{[L-1]} + b^{[L]}). \text{ (This is sometimes also called } \hat{Y} \text{, i.e., this is } \hat{Y}.)$$

**Tips:**

- Use the functions you had previously written
- Use a for loop to replicate `[LINEAR->RELU]`  $(L-1)$  times
- Don't forget to keep track of the caches in the "caches" list. To add a new value `c` to a list, you can use `list.append(c)`.

```

In [20]: # GRADED FUNCTION: L_model_forward

def L_model_forward(X, parameters):
    """
    Implement forward propagation for the [LINEAR->RELU]
    *(L-1)->LINEAR->SIGMOID computation

    Arguments:
    X -- data, numpy array of shape (input size, number
    of examples)
    parameters -- output of initialize_parameters_deep(
    )

    Returns:
    AL -- last post-activation value
    caches -- list of caches containing:
        every cache of linear_relu_forward() (t
        here are L-1 of them, indexed from 0 to L-2)
        the cache of linear_sigmoid_forward() (
        there is one, indexed L-1)
    """

    caches = []
    A = X
    L = len(parameters) // 2 # number
    of layers in the neural network

    # Implement [LINEAR -> RELU]*(L-1). Add "cache" to
    the "caches" list.
    for l in range(1, L):
        A_prev = A
        ### START CODE HERE ### (~ 2 lines of code)
        A, cache = linear_activation_forward(A_prev, pa
        rameters['W' + str(l)], parameters['b' + str(l)], activ
        ation='relu')
        caches.append(cache)
        ### END CODE HERE ###

    # Implement LINEAR -> SIGMOID. Add "cache" to the "
    caches" list.
    ### START CODE HERE ### (~ 2 lines of code)
    AL, cache = linear_activation_forward(A, parameters
    ['W' + str(L)], parameters['b' + str(L)], activation='s
    igmoid')
    caches.append(cache)
    ### END CODE HERE ###

    assert(AL.shape == (1,X.shape[1]))

    return AL, caches

```

```
In [21]: X, parameters = L_model_forward_test_case_2hidden()
AL, caches = L_model_forward(X, parameters)
print("AL = " + str(AL))
print("Length of caches list = " + str(len(caches)))

AL = [[ 0.03921668  0.70498921  0.19734387  0.04728177]]
Length of caches list = 3
```

<b>**AL**</b>	[[ 0.03921668 0.70498921 0.19734387 0.04728177]]
<b>**Length of caches list **</b>	3

Great! Now you have a full forward propagation that takes the input  $X$  and outputs a row vector  $A^{[L]}$  containing your predictions. It also records all intermediate values in "caches". Using  $A^{[L]}$ , you can compute the cost of your predictions.

## 5 - Cost function

Now you will implement forward and backward propagation. You need to compute the cost, because you want to check if your model is actually learning.

**Exercise:** Compute the cross-entropy cost  $J$ , using the following formula:

$$-\frac{1}{m} \sum_{i=1}^m (y^{(i)} \log(a^{[L](i)}) + (1 - y^{(i)}) \log(1 - a^{[L](i)}))$$

```
In [24]: # GRADED FUNCTION: compute_cost

def compute_cost(AL, Y):
    """
    Implement the cost function defined by equation (7)

    Arguments:
    AL -- probability vector corresponding to your label predictions, shape (1, number of examples)
    Y -- true "label" vector (for example: containing 0 if non-cat, 1 if cat), shape (1, number of examples)

    Returns:
    cost -- cross-entropy cost
    """

    m = Y.shape[1]

    # Compute loss from aL and y.
    ### START CODE HERE ### (~ 1 lines of code)
    cost = (-1 / m) * np.sum(np.multiply(Y, np.log(AL)) + np.multiply(1 - Y, np.log(1 - AL)))
    ### END CODE HERE ###

    cost = np.squeeze(cost) # To make sure your cost's shape is what we expect (e.g. this turns [[17]] in to 17).
    assert(cost.shape == ())

    return cost
```

```
In [25]: Y, AL = compute_cost_test_case()

print("cost = " + str(compute_cost(AL, Y)))

cost = 0.414931599615
```


**Expected Output:**

<b>**cost**</b>	0.41493159961539694
-----------------	---------------------

## 6 - Backward propagation module

Just like with forward propagation, you will implement helper functions for backpropagation. Remember that back propagation is used to calculate the gradient of the loss function with respect to the parameters.

**Reminder:**

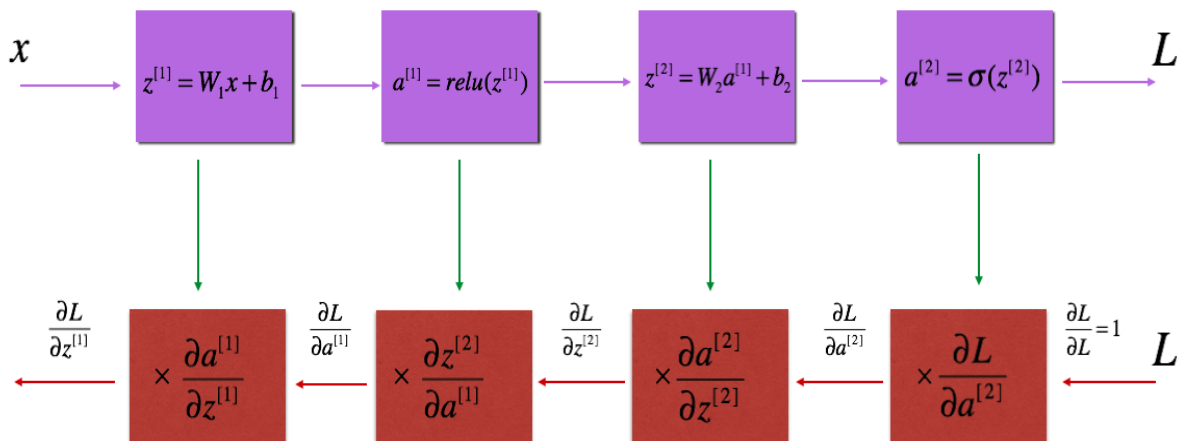

**\*\*Figure 3\*\*** : Forward and Backward propagation for \*LINEAR->RELU->LINEAR->SIGMOID\*  
 \*The purple blocks represent the forward propagation, and the red blocks represent the backward propagation.\*


Now, similar to forward propagation, you are going to build the backward propagation in three steps:

- LINEAR backward
- LINEAR -> ACTIVATION backward where ACTIVATION computes the derivative of either the ReLU or sigmoid activation
- [LINEAR -> RELU]  $\times$  (L-1) -> LINEAR -> SIGMOID backward (whole model)

## 6.1 - Linear backward

For layer  $l$ , the linear part is:  $Z^{[l]} = W^{[l]}A^{[l-1]} + b^{[l]}$  (followed by an activation).

Suppose you have already calculated the derivative  $dZ^{[l]} = \frac{\partial \mathcal{L}}{\partial Z^{[l]}}$ . You want to get  $(dW^{[l]}, db^{[l]}, dA^{[l-1]})$ .

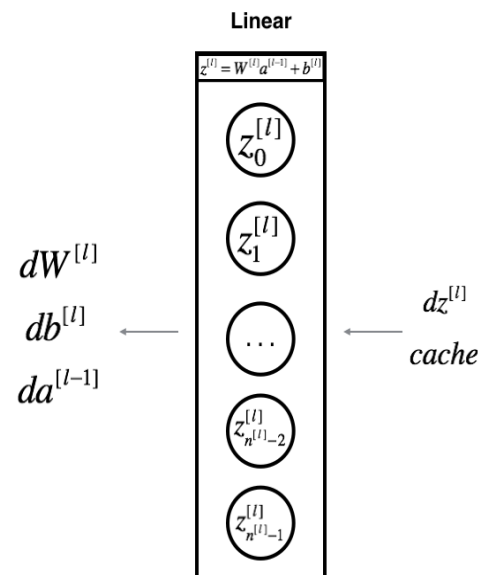

**\*\*Figure 4\*\***

The three outputs  $(dW^{[l]}, db^{[l]}, dA^{[l-1]})$  are computed using the input  $dZ^{[l]}$ . Here are the formulas you need:

$$dW^{[l]} = \frac{\partial \mathcal{L}}{\partial W^{[l]}} = \frac{1}{m} dZ^{[l]} A^{[l-1]T}$$

$$db^{[l]} = \frac{\partial \mathcal{L}}{\partial b^{[l]}} = \frac{1}{m} \sum_{i=1}^m dZ^{[l]}(i)$$

$$dA^{[l-1]} = \frac{\partial \mathcal{L}}{\partial A^{[l-1]}} = W^{[l]T} dZ^{[l]}$$

**Exercise:** Use the 3 formulas above to implement `linear_backward()`.

```
In [36]: # GRADED FUNCTION: linear_backward

def linear_backward(dZ, cache):
    """
    Implement the linear portion of backward propagation
    for a single layer (layer l)

    Arguments:
    dZ -- Gradient of the cost with respect to the line
ar output (of current layer l)
    cache -- tuple of values (A_prev, W, b) coming from
the forward propagation in the current layer

    Returns:
    dA_prev -- Gradient of the cost with respect to the
activation (of the previous layer l-1), same shape as A
_prev
    dW -- Gradient of the cost with respect to W (curre
nt layer l), same shape as W
    db -- Gradient of the cost with respect to b (curre
nt layer l), same shape as b
    """
    A_prev, W, b = cache
    m = A_prev.shape[1]

    ### START CODE HERE ### (~ 3 lines of code)
    dW = np.dot(dZ, cache[0].T) / m
    db = np.squeeze(np.sum(dZ, axis=1, keepdims=True))
    / m
    dA_prev = np.dot(cache[1].T, dZ)
    ### END CODE HERE ###

    assert (dA_prev.shape == A_prev.shape)
    assert (dW.shape == W.shape)
    assert (isinstance(db, float))

    return dA_prev, dW, db
```

```
In [37]: # Set up some test inputs
dZ, linear_cache = linear_backward_test_case()

dA_prev, dW, db = linear_backward(dZ, linear_cache)
print ("dA_prev = " + str(dA_prev))
print ("dW = " + str(dW))
print ("db = " + str(db))

dA_prev = [[ 0.51822968 -0.19517421]
 [-0.40506361  0.15255393]
 [ 2.37496825 -0.89445391]]
dW = [[-0.10076895  1.40685096  1.64992505]]
db = 0.506294475007
```

**Expected Output:**

<b>**dA_prev**</b>	[[ 0.51822968 -0.19517421] [-0.40506361 0.15255393] [ 2.37496825 -0.89445391]]
<b>**dW**</b>	[[ -0.10076895 1.40685096 1.64992505]]
<b>**db**</b>	[[ 0.50629448]]

**6.2 - Linear-Activation backward**

Next, you will create a function that merges the two helper functions: **linear\_backward** and the backward step for the activation **linear\_activation\_backward**.

To help you implement `linear_activation_backward`, we provided two backward functions:

- **sigmoid\_backward**: Implements the backward propagation for SIGMOID unit. You can call it as follows:

```
dZ = sigmoid_backward(dA, activation_cache)
```

- **relu\_backward**: Implements the backward propagation for RELU unit. You can call it as follows:

```
dZ = relu_backward(dA, activation_cache)
```

If  $g(\cdot)$  is the activation function, `sigmoid_backward` and `relu_backward` compute

$$dZ^{[l]} = dA^{[l]} * g'(Z^{[l]})$$

.

**Exercise:** Implement the backpropagation for the *LINEAR->ACTIVATION* layer.



```

In [40]: # GRADED FUNCTION: linear_activation_backward

def linear_activation_backward(dA, cache, activation):
    """
    Implement the backward propagation for the LINEAR->
    ACTIVATION layer.

    Arguments:
    dA -- post-activation gradient for current layer l
    cache -- tuple of values (linear_cache, activation_
    cache) we store for computing backward propagation effi-
    ciently
    activation -- the activation to be used in this lay-
    er, stored as a text string: "sigmoid" or "relu"

    Returns:
    dA_prev -- Gradient of the cost with respect to the
    activation (of the previous layer l-1), same shape as A
    _prev
    dW -- Gradient of the cost with respect to W (curre-
    nt layer l), same shape as W
    db -- Gradient of the cost with respect to b (curre-
    nt layer l), same shape as b
    """
    linear_cache, activation_cache = cache

    if activation == "relu":
        ### START CODE HERE ### (~ 2 lines of code)
        dZ = relu_backward(dA, activation_cache)
        dA_prev, dW, db = linear_backward(dZ, linear_ca-
che)
        ### END CODE HERE ###

    elif activation == "sigmoid":
        ### START CODE HERE ### (~ 2 lines of code)
        dZ = sigmoid_backward(dA, activation_cache)
        dA_prev, dW, db = linear_backward(dZ, linear_ca-
che)
        ### END CODE HERE ###

    return dA_prev, dW, db

```

```

In [41]: AL, linear_activation_cache = linear_activation_backward
         d_test_case()

         dA_prev, dW, db = linear_activation_backward(AL, linear
         _activation_cache, activation = "sigmoid")
         print ("sigmoid:")
         print ("dA_prev = " + str(dA_prev))
         print ("dW = " + str(dW))
         print ("db = " + str(db) + "\n")

         dA_prev, dW, db = linear_activation_backward(AL, linear
         _activation_cache, activation = "relu")
         print ("relu:")
         print ("dA_prev = " + str(dA_prev))
         print ("dW = " + str(dW))
         print ("db = " + str(db))

sigmoid:
dA_prev = [[ 0.11017994  0.01105339]
 [ 0.09466817  0.00949723]
 [-0.05743092 -0.00576154]]
dW = [[ 0.10266786  0.09778551 -0.01968084]]
db = -0.0572962221763

relu:
dA_prev = [[ 0.44090989  0.          ]
 [ 0.37883606  0.          ]
 [-0.2298228  0.          ]]
dW = [[ 0.44513824  0.37371418 -0.10478989]]
db = -0.208378923703

```

**Expected output with sigmoid:**


dA_prev	[[ 0.11017994 0.01105339] [ 0.09466817 0.00949723] [-0.05743092 -0.00576154]]
dW	[[ 0.10266786 0.09778551 -0.01968084]]
db	[[ -0.05729622]]

**Expected output with relu:**

dA_prev	[[ 0.44090989 0. ] [ 0.37883606 0. ] [-0.2298228 0. ]]
dW	[[ 0.44513824 0.37371418 -0.10478989]]
db	[[ -0.20837892]]

### 6.3 - L-Model Backward

Now you will implement the backward function for the whole network. Recall that when you implemented the `L_model_forward` function, at each iteration, you stored a cache which contains  $(X, W, b, \text{ and } z)$ . In the back propagation module, you will use those variables to compute the gradients. Therefore, in the `L_model_backward` function, you will iterate through all the hidden layers backward, starting from layer  $L$ . On each step, you will use the cached values for layer  $l$  to backpropagate through layer  $l$ . Figure 5 below shows the backward pass.

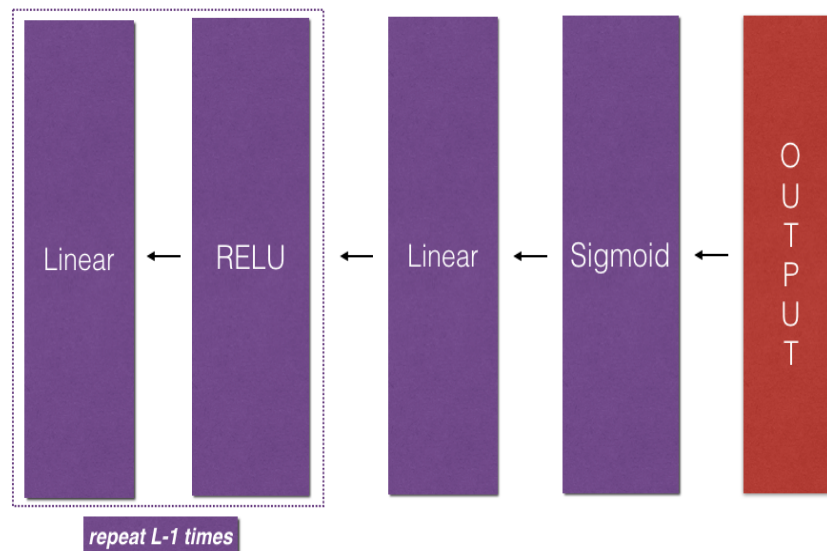

**\*\*Figure 5\*\*** : Backward pass

**Initializing backpropagation:** To backpropagate through this network, we know that the output is,  $A^{[L]} = \sigma(Z^{[L]})$ . Your code thus needs to compute  $dA^{[L]} = \frac{\partial \mathcal{L}}{\partial A^{[L]}}$ . To do so, use this formula (derived using calculus which you don't need in-depth knowledge of):

```
dAL = - (np.divide(Y, AL) - np.divide(1 - Y, 1 - AL)) # derivative of cost with respect to AL
```

You can then use this post-activation gradient  $dA^{[L]}$  to keep going backward. As seen in Figure 5, you can now feed in  $dA^{[L]}$  into the LINEAR->SIGMOID backward function you implemented (which will use the cached values stored by the `L_model_forward` function). After that, you will have to use a `for` loop to iterate through all the other layers using the LINEAR->RELU backward function. You should store each  $dA$ ,  $dW$ , and  $db$  in the `grads` dictionary. To do so, use this formula :

$$grads["dW" + str(l)] = dW^{[l]}$$

For example, for  $l = 3$

**Exercise:** Implement backpropagation for the  $[LINEAR \rightarrow RELU] \times (L-1) \rightarrow LINEAR \rightarrow SIGMOID$  model.

```

In [48]: # GRADED FUNCTION: L_model_backward

def L_model_backward(AL, Y, caches):
    """
    Implement the backward propagation for the [LINEAR-
    >RELU] * (L-1) -> LINEAR -> SIGMOID group

    Arguments:
    AL -- probability vector, output of the forward pro
    pagation (L_model_forward())
    Y -- true "label" vector (containing 0 if non-cat,
    1 if cat)
    caches -- list of caches containing:
                every cache of linear_activation_forwar
    d() with "relu" (it's caches[l], for l in range(L-1) i.
    e l = 0...L-2)
                the cache of linear_activation_forward(
    ) with "sigmoid" (it's caches[L-1])

    Returns:
    grads -- A dictionary with the gradients
                grads["dA" + str(l)] = ...
                grads["dW" + str(l)] = ...
                grads["db" + str(l)] = ...
    """
    grads = {}
    L = len(caches) # the number of layers
    m = AL.shape[1]
    Y = Y.reshape(AL.shape) # after this line, Y is the
    same shape as AL

    # Initializing the backpropagation
    ### START CODE HERE ### (1 line of code)
    dAL = - (np.divide(Y, AL) - np.divide(1 - Y, 1 - AL
    )) # derivative of cost with respect to AL
    ### END CODE HERE ###

    # Lth layer (SIGMOID -> LINEAR) gradients. Inputs:
    "AL, Y, caches". Outputs: "grads["dAL"]", grads["dWL"],
    grads["dbL"]
    ### START CODE HERE ### (approx. 2 lines)
    current_cache = caches[L - 1]
    grads["dA" + str(L)], grads["dW" + str(L)], grads["
    db" + str(L)] = linear_activation_backward(dAL, current
    _cache, activation = "sigmoid")
    ### END CODE HERE ###

    for l in reversed(range(L-1)):
        # lth layer: (RELU -> LINEAR) gradients.
        # Inputs: "grads["dA" + str(l + 2)], caches". 0
        utputs: "grads["dA" + str(l + 1)] , grads["dW" + str(l
        + 1)] , grads["db" + str(l + 1)]
        ### START CODE HERE ### (approx. 5 lines)
        current_cache = caches[l]
        dA_prev_temp, dW_temp, db_temp = linear_activat

```

```

In [49]: AL, Y_assess, caches = L_model_backward_test_case()
        grads = L_model_backward(AL, Y_assess, caches)
        print_grads(grads)

-----
-----
AssertionError                                Traceback (most recent call last)
<ipython-input-49-525dcf1dcad4> in <module>()
      1 AL, Y_assess, caches = L_model_backward_test_case()
----> 2 grads = L_model_backward(AL, Y_assess, caches)
      3 print_grads(grads)

<ipython-input-48-b9b72f41d406> in L_model_backward(AL, Y, caches)
     39     """ START CODE HERE """ (approx. 5 lines)
     40
--> 41     current_cache = caches[l]
     42     dA_prev_temp, dW_temp, db_temp = linear_activation_backward(grads["dA" + str(l + 2)], current_cache, activation = "relu")
     43     grads["dA" + str(l + 1)] = dA_prev_temp
     44     grads["dW" + str(l + 1)] = dW_temp

<ipython-input-40-b1818dccebf9> in linear_activation_backward(dA, cache, activation)
     20     """ START CODE HERE """ (~ 2 lines of code)
     21
--> 22     dZ = relu_backward(dA, activation_cache)
     23     dA_prev, dW, db = linear_backward(dZ, linear_cache)
     24     """ END CODE HERE """

<ipython-input-36-38cca6643801> in linear_backward(dZ, cache)
     25     assert (dA_prev.shape == A_prev.shape)
     26     assert (dW.shape == W.shape)
--> 27     assert (isinstance(db, float))
     28
     29     return dA_prev, dW, db

AssertionError:

```

**Expected Output**

dW1	[[ 0.41010002 0.07807203 0.13798444 0.10502167] [ 0. 0. 0. 0. ] [ 0.05283652 0.01005865 0.01777766 0.0135308 ]]
db1	[[ -0.22007063] [ 0. ] [ -0.02835349]]
dA1	[[ 0.12913162 -0.44014127] [ -0.14175655 0.48317296] [ 0.01663708 -0.05670698]]

**6.4 - Update Parameters**

In this section you will update the parameters of the model, using gradient descent:

$$W^{[l]} = W^{[l]} - \alpha dW^{[l]}$$

$$b^{[l]} = b^{[l]} - \alpha db^{[l]}$$

where  $\alpha$   
parameters dictionary.

**Exercise:** Implement `update_parameters()` to update your parameters using gradient descent.

**Instructions:** Update parameters using gradient descent on every  $W^{[l]}$   
 $l = 1, 2, \dots, L$

```
In [42]: # GRADED FUNCTION: update_parameters

def update_parameters(parameters, grads, learning_rate)
:
    """
    Update parameters using gradient descent

    Arguments:
    parameters -- python dictionary containing your par
ameters
    grads -- python dictionary containing your gradient
s, output of L_model_backward

    Returns:
    parameters -- python dictionary containing your upd
ated parameters
    """
    parameters["W" + str(l)] = ...
    parameters["b" + str(l)] = ...

    L = len(parameters) // 2 # number of layers in the
neural network

    # Update rule for each parameter. Use a for loop.
    ### START CODE HERE ### (~ 3 lines of code)
    for l in range(L):
        parameters["W" + str(l + 1)] = parameters["W" +
str(l + 1)] - learning_rate * grads["dW" + str(l + 1)]
        parameters["b" + str(l + 1)] = parameters["b" +
str(l + 1)] - learning_rate * grads["db" + str(l + 1)]

    ### END CODE HERE ###
    return parameters
```

```
In [43]: parameters, grads = update_parameters_test_case()
parameters = update_parameters(parameters, grads, 0.1)
```

```
print ("W1 = "+ str(parameters["W1"]))
print ("b1 = "+ str(parameters["b1"]))
print ("W2 = "+ str(parameters["W2"]))
print ("b2 = "+ str(parameters["b2"]))
```

```
W1 = [[-0.59562069 -0.09991781 -2.14584584  1.82662008]
      [-1.76569676 -0.80627147  0.51115557 -1.18258802]
      [-1.0535704  -0.86128581  0.68284052  2.20374577]]
b1 = [[-0.04659241]
      [-1.28888275]
      [ 0.53405496]]
W2 = [[-0.55569196  0.0354055  1.32964895]]
b2 = [[-0.84610769]]
```

**Expected Output:**

W1	[[ -0.59562069 -0.09991781 -2.14584584 1.82662008] [-1.76569676 -0.80627147 0.51115557 -1.18258802] [-1.0535704 -0.86128581 0.68284052 2.20374577]]
b1	[[ -0.04659241] [-1.28888275] [ 0.53405496]]
W2	[[ -0.55569196 0.0354055 1.32964895]]
b2	[[ -0.84610769]]

## 7 - Conclusion

Congrats on implementing all the functions required for building a deep neural network!

We know it was a long assignment but going forward it will only get better. The next part of the assignment is easier.

In the next assignment you will put all these together to build two models:

- A two-layer neural network
- An L-layer neural network

You will in fact use these models to classify cat vs non-cat images!

In [ ]: