


Introduction

- Motivation:**
- Breast ultrasound is widely used for early breast lesion detection.
 - Precise segmentation aids radiologists and minimizes misdiagnosis.
- Challenges:**
- Speckle noise and blurry lesion boundaries.
 - High variability in image quality.

- Objective:**
- Evaluate four state-of-the-art deep learning models on two public datasets for breast lesion segmentation.

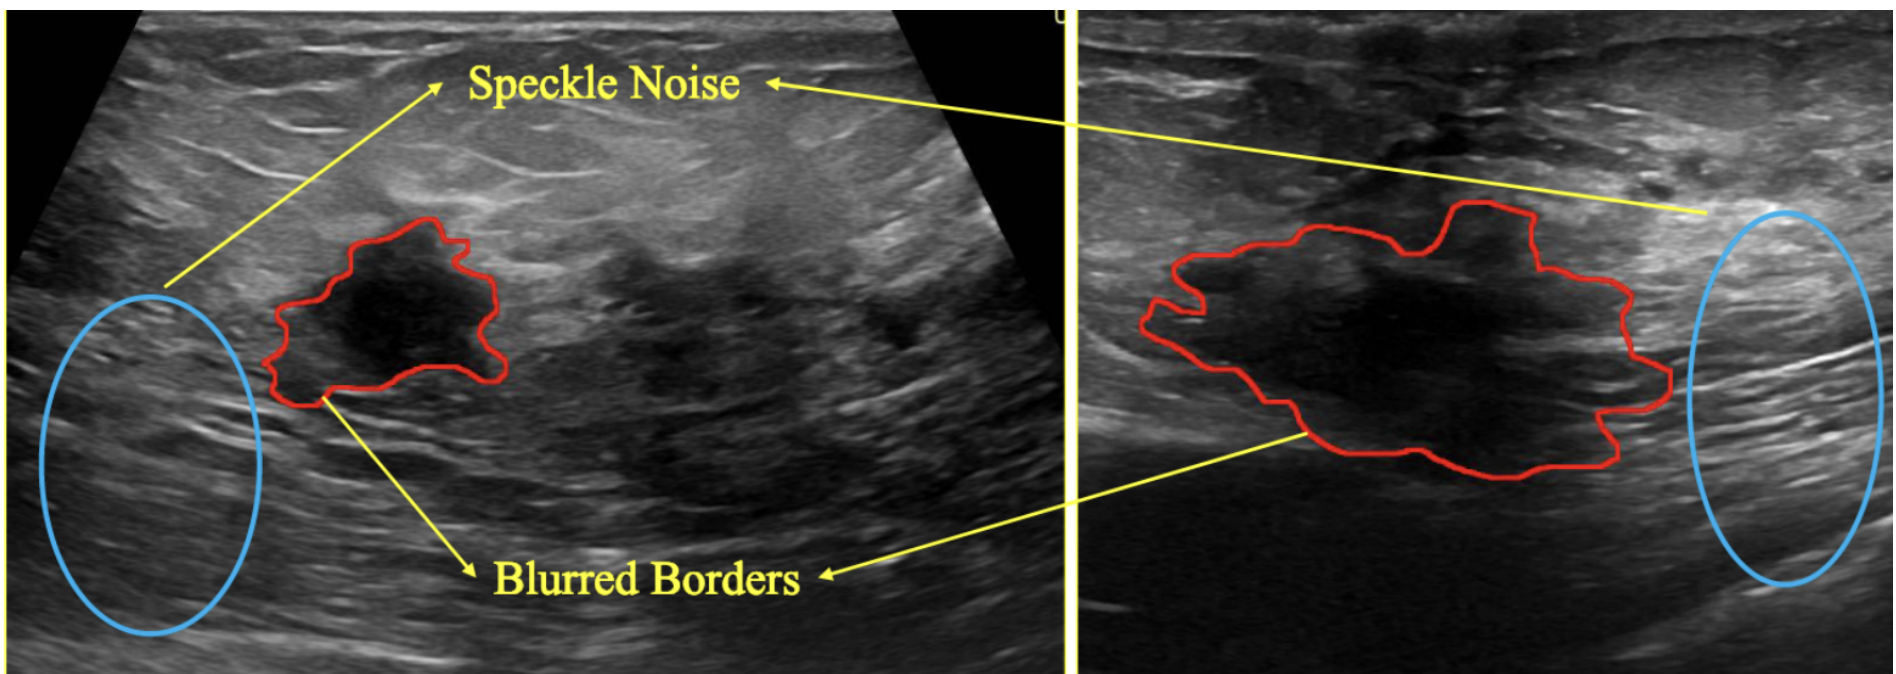

* Red lines show blurred lesion edges; blue circles highlight speckle noise [1].

Related Work

- Breast Ultrasound Segmentation:**
- Traditional/classical methods suffer from noise sensitivity and poor generalization [2].
 - Deep learning methods outperform classical approaches in accuracy and robustness [3].

- SOTA Models:**
- U-Net** [4]: Strong baseline for biomedical segmentation with limited data.
 - FPN** [5]: Combines multi-scale features for better localization.
 - DeepLabV3+** [6]: Uses dilated convolutions for detailed boundary detection.
 - U-Net++** [7]: Enhanced feature fusion via nested skip connections.

Methods

Datasets:
BUSIS [8]: 562 images, avg. size 550×457
UDAIT [9]:163 images, 344×233 to 753×617.

Data Augmentation: resizing (512×512), additive Gaussian noise, box & motion blur, and random changes in: brightness, contrast, hue & saturation.


- Experimental Setup:**
- Training/Validation split** 70% / 30%
 - Epochs:** 15, **Batch size:** 4
 - Learning Rate:** 2e-4, **Optimizer:** Adam
 - Encoder:** ResNet18 pretrained on ImageNet
 - Loss:** Dice Loss

Quantitative Results

Best results are highlighted in bold				
	Dice	Jaccard	Recall	Precision
UNet	0.919 / 0.768	0.858 / 0.665	0.905 / 0.822	0.946 /0.820
FPN	0.910 / 0.760	0.844 / 0.649	0.908 / 0.752	0.927 / 0.804
DeepLabv3+	0.907 / 0.735	0.841 / 0.623	0.928 / 0.765	0.900 / 0.751
UNet++	0.919 / 0.755	0.860 / 0.665	0.904 / 0.755	0.949 / 0.890

Qualitative Results


- Green:** False Positives (healthy tissue misclassified as lesion)
- Red:** False Negatives (missed lesion regions)
- Black:** True Negatives (background)
- White:** True Positives (lesion)

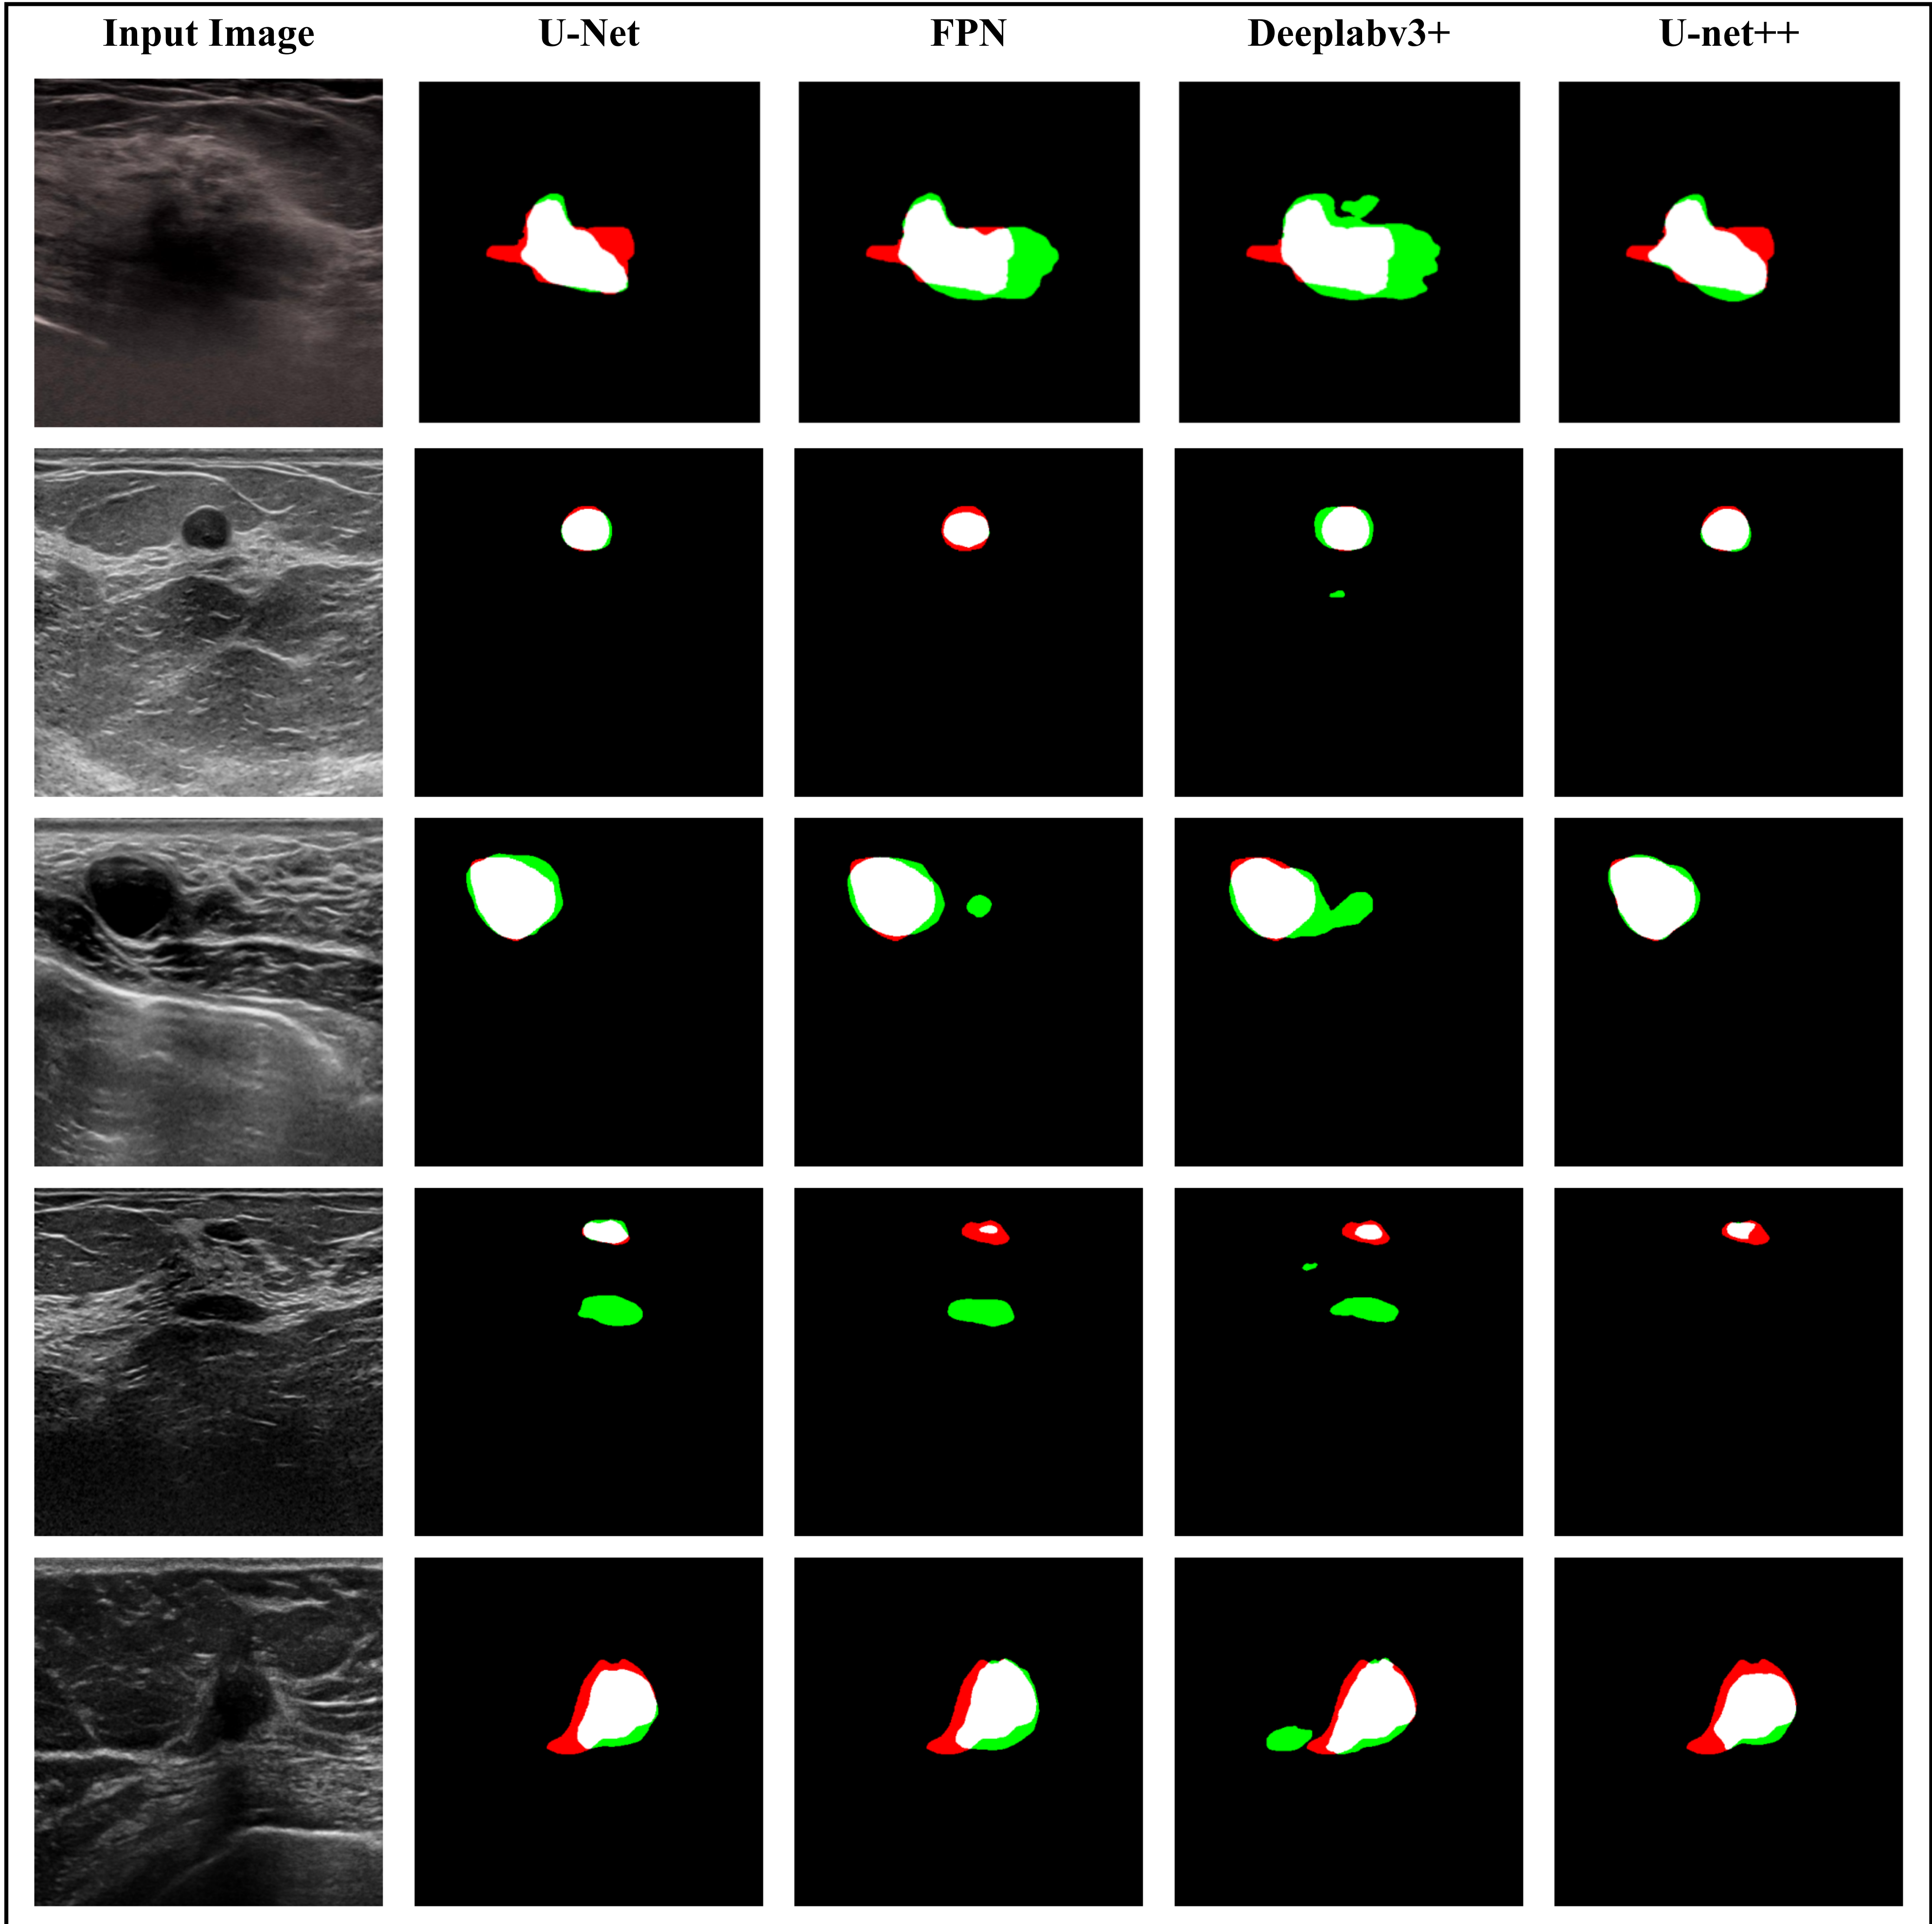

Discussion

- UNet++** has the best overall results, especially in precision.
- UNet** also performed well, with high Dice and Jaccard scores.
- DeepLabv3+** had the highest recall but more false positives.
- FPN** was stable but less accurate in the **UDIAT** data set.
- UNet++** is a good balance between accuracy and fewer errors.

QR Code

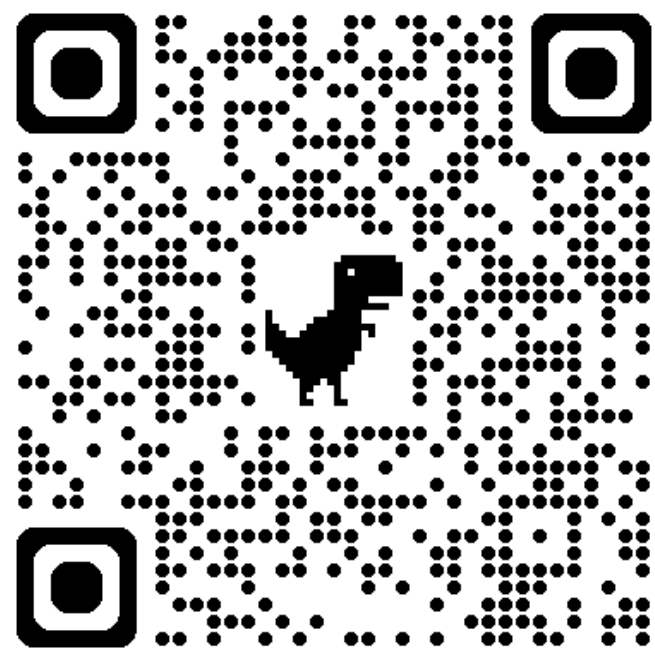

References

[1] Yue Sun, Zhaohong Huang, Guorong Cai, Jinhe Su, and Zheng Gong. Nsbr-net: A novel noise suppression and boundary refinement network for breast tumor segmentation in ultrasound images. *Algorithms*, 17:257, 2024.

[2] Kuan Huang, Yingtao Zhang, Heng-Da Cheng, Ping Xing, and Boyu Zhang. Semantic segmentation of breast ultrasound image with fuzzy deep learning network and breast anatomy constraints. *Neurocomputing*, 450:319–335, 2021.

[3] Qinghua Huang, Yaozhong Luo, and Qiangzhi Zhang. Breast ultrasound image segmentation: a survey. *International journal of computer assisted radiology and surgery*, 12:493–507, 2017.

[4] Olaf Ronneberger, Philipp Fischer, and Thomas Brox. U-net: Convolutional networks for biomedical image segmentation. In *MICCAI*, pages 234–241. Springer, 2015.

[5] Tsung-Yi Lin, Piotr Dollár, Ross Girshick, Kaiming He, Bharath Hariharan, and Serge Belongie. Feature pyramid networks for object detection. In *CVPR*, pages 2117–2125, 2017.

[6] Liang-Chieh Chen, George Papandreou, Florian Schroff, and Hartwig Adam. Rethinking atrous convolution for semantic image segmentation. *arXiv preprint arXiv:1706.05587*, 2017.

[7] Zongwei Zhou, Md Mahfuzur Rahman Siddiquee, Nima Tajbakhsh, and Jianming Liang. Unet++: A nested u-net architecture for medical image segmentation. In *DLIA - MICCAI*, pages 3–11. Springer, 2018.

[8] Yingtao Zhang, Min Xian, Heng-Da Cheng, Bryar Shareef, Jianrui Ding, Fei Xu, Kuan Huang, Boyu Zhang, Chunping Ning, and Ying Wang. Busis: a benchmark for breast ultrasound image segmentation. In *Healthcare*, volume 10, page 729. MDPI, 2022.

[9] Gerard Pons, Joan Martí, Robert Martí, Sergi Ganau, Joan Carles Vilanova, and J Alison Noble. Evaluating lesion segmentation on breast sonography as related to lesion type. *JUM*, pages 1659–1670, 2013.