



Lab3a Screen Shots

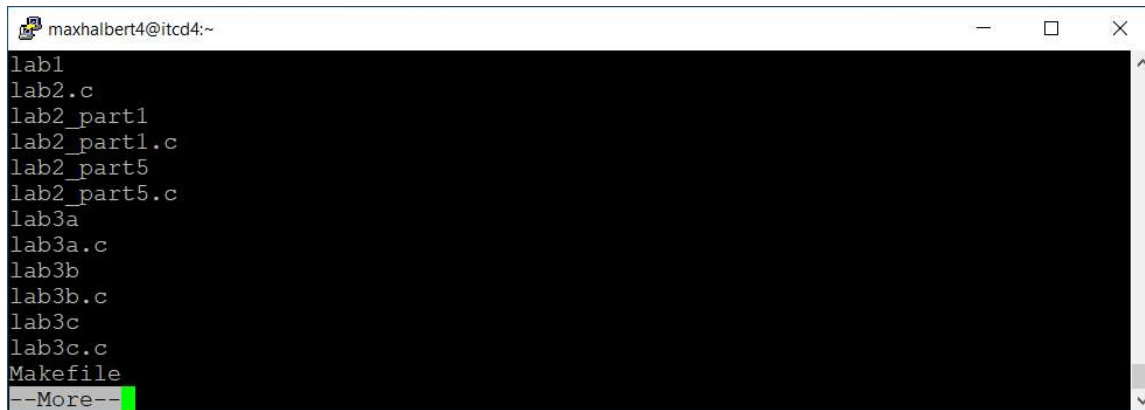

```
maxhalbert4@itcd4:~  
lab1  
lab2.c  
lab2_part1  
lab2_part1.c  
lab2_part5  
lab2_part5.c  
lab3a  
lab3a.c  
lab3b  
lab3b.c  
lab3c  
lab3c.c  
Makefile  
--More--
```

A terminal window titled 'maxhalbert4@itcd4:~' showing a file listing. The files listed are lab1, lab2.c, lab2_part1, lab2_part1.c, lab2_part5, lab2_part5.c, lab3a, lab3a.c, lab3b, lab3b.c, lab3c, lab3c.c, and Makefile. The prompt '--More--' is visible at the bottom, indicating that the list is truncated.

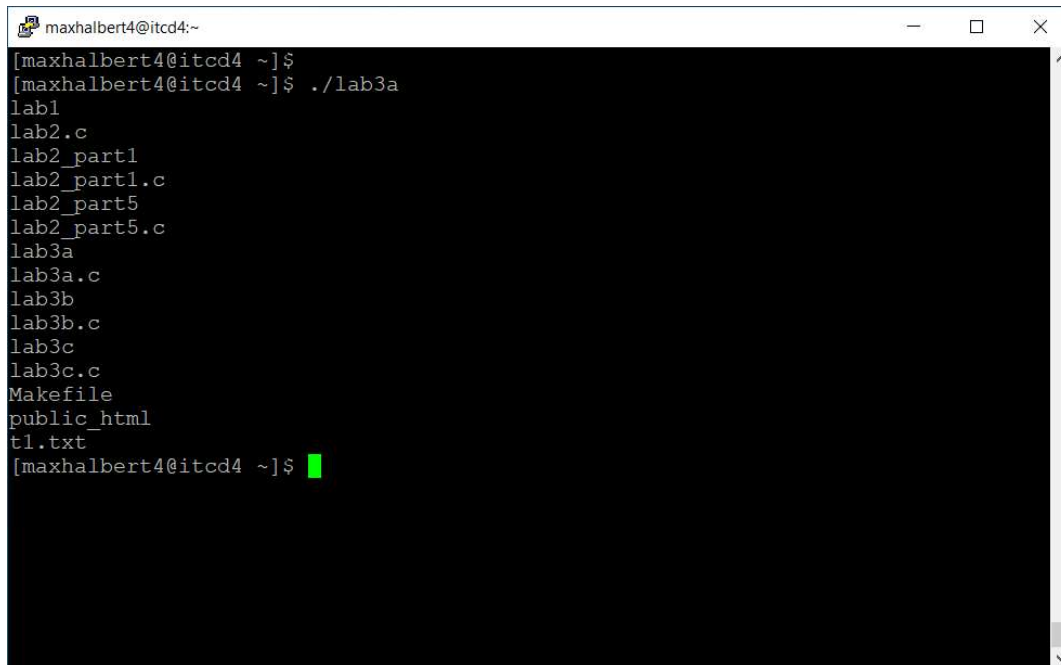

```
maxhalbert4@itcd4:~  
[maxhalbert4@itcd4 ~]$  
[maxhalbert4@itcd4 ~]$ ./lab3a  
lab1  
lab2.c  
lab2_part1  
lab2_part1.c  
lab2_part5  
lab2_part5.c  
lab3a  
lab3a.c  
lab3b  
lab3b.c  
lab3c  
lab3c.c  
Makefile  
public_html  
t1.txt  
[maxhalbert4@itcd4 ~]$
```

A terminal window titled 'maxhalbert4@itcd4:~' showing the execution of the command './lab3a'. The output of the command is a file listing: lab1, lab2.c, lab2_part1, lab2_part1.c, lab2_part5, lab2_part5.c, lab3a, lab3a.c, lab3b, lab3b.c, lab3c, lab3c.c, Makefile, public_html, and t1.txt. The prompt '[maxhalbert4@itcd4 ~]\$' is visible at the bottom.